

Dialight

607 Series

LED Panel Mount Indicators for 7mm Mounting Hole



FEATURES / BENEFITS

- ▲ Long Life - typically 100K hours
- ▲ Low power consumption - uses up to 90% less energy than an incandescent indicator
- ▲ No heat generated
- ▲ Colors include red, green and yellow
- ▲ Front panel mounting
- ▲ Chrome or plastic housing


APPLICATIONS

Dialight's 600 series of metric indicators are designed for a variety of applications such as:

- Main and remote power indication
- Status Indication
- Maintenance and warning indication
- Instrumentation
- ...and many more!

SPECIFICATIONS

- ▲ Voltage requirements:
2 VDC (current limiting resistor required)
6 and 12 VDC (no resistor required)
- ▲ Electrical connection through solder terminals
- ▲ Mounting hole size: 0.287 inches (7.3 mm)
- ▲ Maximum panel thickness: see reverse side
- ▲ Mounts with lock washer and nut
0.362 lbs/ft or 5 Kg/cm torque recommended
0.217 lbs/ft or 3 Kg/cm torque recommended (Figure 5 only)
- ▲ Operating Temperature : -25°C to +85°C
- ▲ Storage Temperature: -25°C to +85°C
- ▲ Housing Material:
Chrome plated brass
Polycarbonate to match emitting color -
(Figure 5)

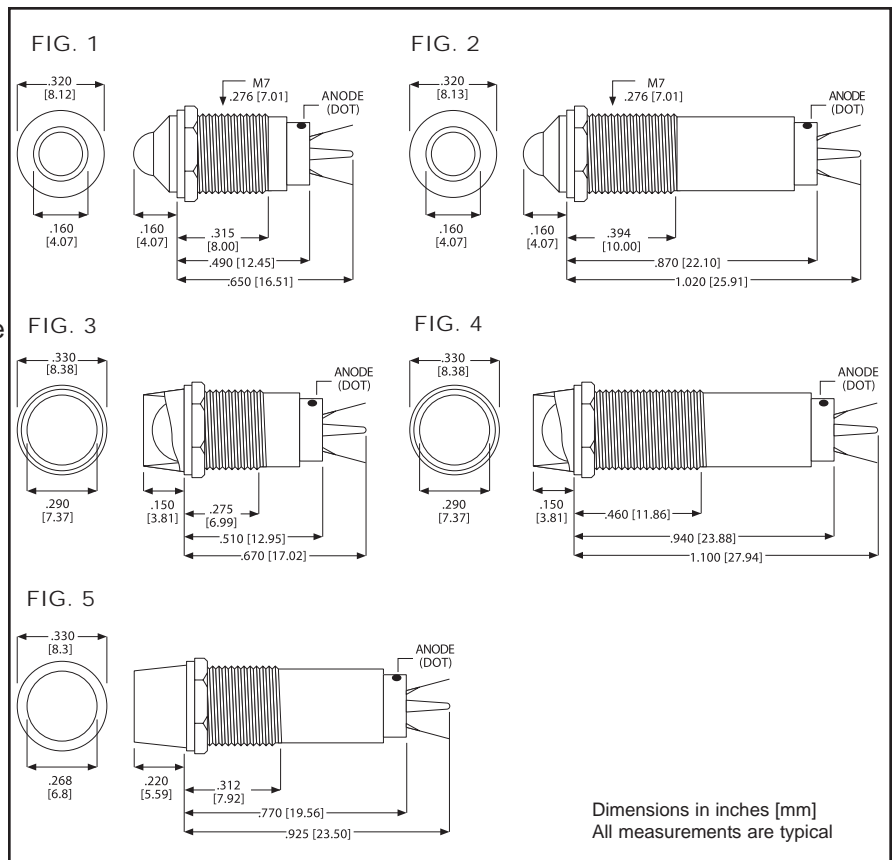

Dialight reserves the right to make changes at any time in order to supply the best product possible.



Dialight Corporation

1501 Route 34 South • Farmingdale, NJ 07727 USA

Tel: (1) 732-919-3119 • Fax: (1) 732-751-5778 • www.dialight.com



MDEL607X001_A



607 Series LED Panel Mount Indicators for 7mm Mounting Hole

SPECIFICATIONS

Part Number	Color	Voltage (VDC)	Current (mA)	Intensity TYP. (mcd)	LED Positions	Finish	Figure	Panel Thickness
607-1112-110	Red	2	15	22	Protruding	Chrome	1	0.138 inches (3.5mm)
607-1212-110	Green	2	15	50	Protruding	Chrome	1	
607-1312-110	Yellow	2	15	66	Protruding	Chrome	1	
607-1112-120	Red	6	15	22	Protruding	Chrome	2	0.236 inches (6mm)
607-1212-120	Green	6	15	50	Protruding	Chrome	2	
607-1312-120	Yellow	6	15	66	Protruding	Chrome	2	
607-1112-130	Red	12	15	22	Protruding	Chrome	2	
607-1212-130	Green	12	15	50	Protruding	Chrome	2	
607-1312-130	Yellow	12	15	66	Protruding	Chrome	2	
607-2112-110	Red	2	15	22	Recess	Chrome	3	0.138 inches (3.5mm)
607-2212-110	Green	2	15	50	Recess	Chrome	3	
607-2312-110	Yellow	2	15	66	Recess	Chrome	3	
607-2112-120	Red	6	15	22	Recess	Chrome	4	0.236 inches (6mm)
607-2212-120	Green	6	15	50	Recess	Chrome	4	
607-2312-120	Yellow	6	15	66	Recess	Chrome	4	
607-2112-130	Red	12	15	22	Recess	Chrome	4	
607-2212-130	Green	12	15	50	Recess	Chrome	4	
607-2312-130	Yellow	12	15	66	Recess	Chrome	4	
607-3132-120	Red	6	15	20	Internal	Polycarbonate*	5	0.236 inches (6mm)
607-3232-120	Green	6	15	45	Internal	Polycarbonate*	5	
607-3332-120	Yellow	6	15	60	Internal	Polycarbonate*	5	
607-3132-130	Red	12	15	20	Internal	Polycarbonate*	5	
607-3232-130	Green	12	15	45	Internal	Polycarbonate*	5	
607-3332-130	Yellow	12	15	60	Internal	Polycarbonate*	5	

* Match emitting color

Dialight reserves the right to make changes at any time in order to supply the best product possible.



A4703



ISO 9001

Dialight Corporation

Dialight Corporation

1501 Route 34 South • Farmingdale, NJ 07727 USA

Tel: (1) 732-919-3119 • Fax: (1) 732-751-5778 • www.dialight.com



a Roxboro Group Company

MDEL607X001_A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Dialight:

[607-2112-120](#) [607-2312-130F](#) [607-2112-130](#) [607-2312-120F](#) [607-2312-130](#) [607-2312-120](#) [607-2212-120](#) [607-2112-130F](#) [607-2212-120F](#) [607-2112-120F](#) [607-2212-130](#) [607-2212-130F](#)