

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0878630025](#)
Status: **Active**
Overview: Serial Attached SCSI (SAS) Connectors
Description: 1.27mm Signal Pitch, 0.80mm SCSI Pitch, 1.27mm Power Pitch SAS 6G Receptacle, Vertical, Press fit, 3.50mm Tail Length, 29 Circuits, Lead-Free

Documents:
[3D Model](#)
[Drawing \(PDF\)](#)
[Product Specification PS-87863-060-001 \(PDF\)](#)
[Packaging Specification PK-87863-001 \(PDF\)](#)
[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification


CSA LR19980
UL E29179

General

Product Family I/O Connectors
Series [87863](#)
Application Board-to-Board
Comments No pick and place cap
Component Type Receptacle
Overview Serial Attached SCSI (SAS) Connectors
Product Name SAS 6G
Type N/A
UPC 822350197410

Physical

Boot Color N/A
Circuits (Loaded) 29
Circuits (maximum) 29
Circuits Detail Signal 14, Power 15
Color - Resin Black
Durability (mating cycles max) 500
Flammability 94V-0
Gender Female
Keying to Mating Part Yes
Lock to Mating Part None
Material - Metal Phosphor Bronze
Material - Plating Mating Gold
Material - Plating Termination Tin
Material - Resin High Temperature Thermoplastic
Net Weight 1.610/g
Number of Rows 2
Orientation Vertical
PC Tail Length 3.00mm, 3.50mm
PCB Locator Yes
PCB Retention Yes
PCB Thickness - Recommended 2.29mm, 3.18mm
Packaging Type Tray
Panel Mount Yes
Pitch - Mating Interface 0.80mm, 1.27mm
Pitch - Termination Interface 0.80mm, 1.27mm
Plating min - Mating 0.762µm
Plating min - Termination 2.540µm
Polarized to Mating Part Yes
Polarized to PCB Yes
Surface Mount Compatible (SMC) N/A

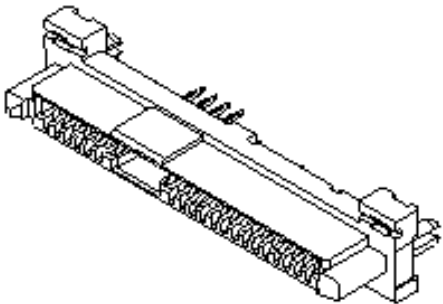

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Not Contained Per -
ED/61/2018 (27 June
2018)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series

[87863 Series](#)

Mates With

[87679](#) , [87799](#) , [87703](#) , SFF 8482 Hard
Disk Drive and Backplane Plug

Temperature Range - Operating	0° to +55°C
Termination Interface: Style	Through Hole - Compliant Pin
Waterproof / Dustproof	No
Wire Size AWG	N/A
Electrical	
Current - Maximum per Contact	1.5A
Shielded	No
Voltage - Maximum	30V
Solder Process Data	
Lead-freeProcess Capability	N/A
Material Info	
Reference - Drawing Numbers	
Electrical Model Document	EE-87863-001, EE-87863-002, EE-87863-003, EE-87863-004, EE-87863-005, EE-87863-006, EE-87863-007, EE-87863-008
Packaging Specification	PK-87863-001
Product Specification	PS-87863-060-001
Sales Drawing	SD-87863-059

This document was generated on 10/08/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[87863-0025](#)