

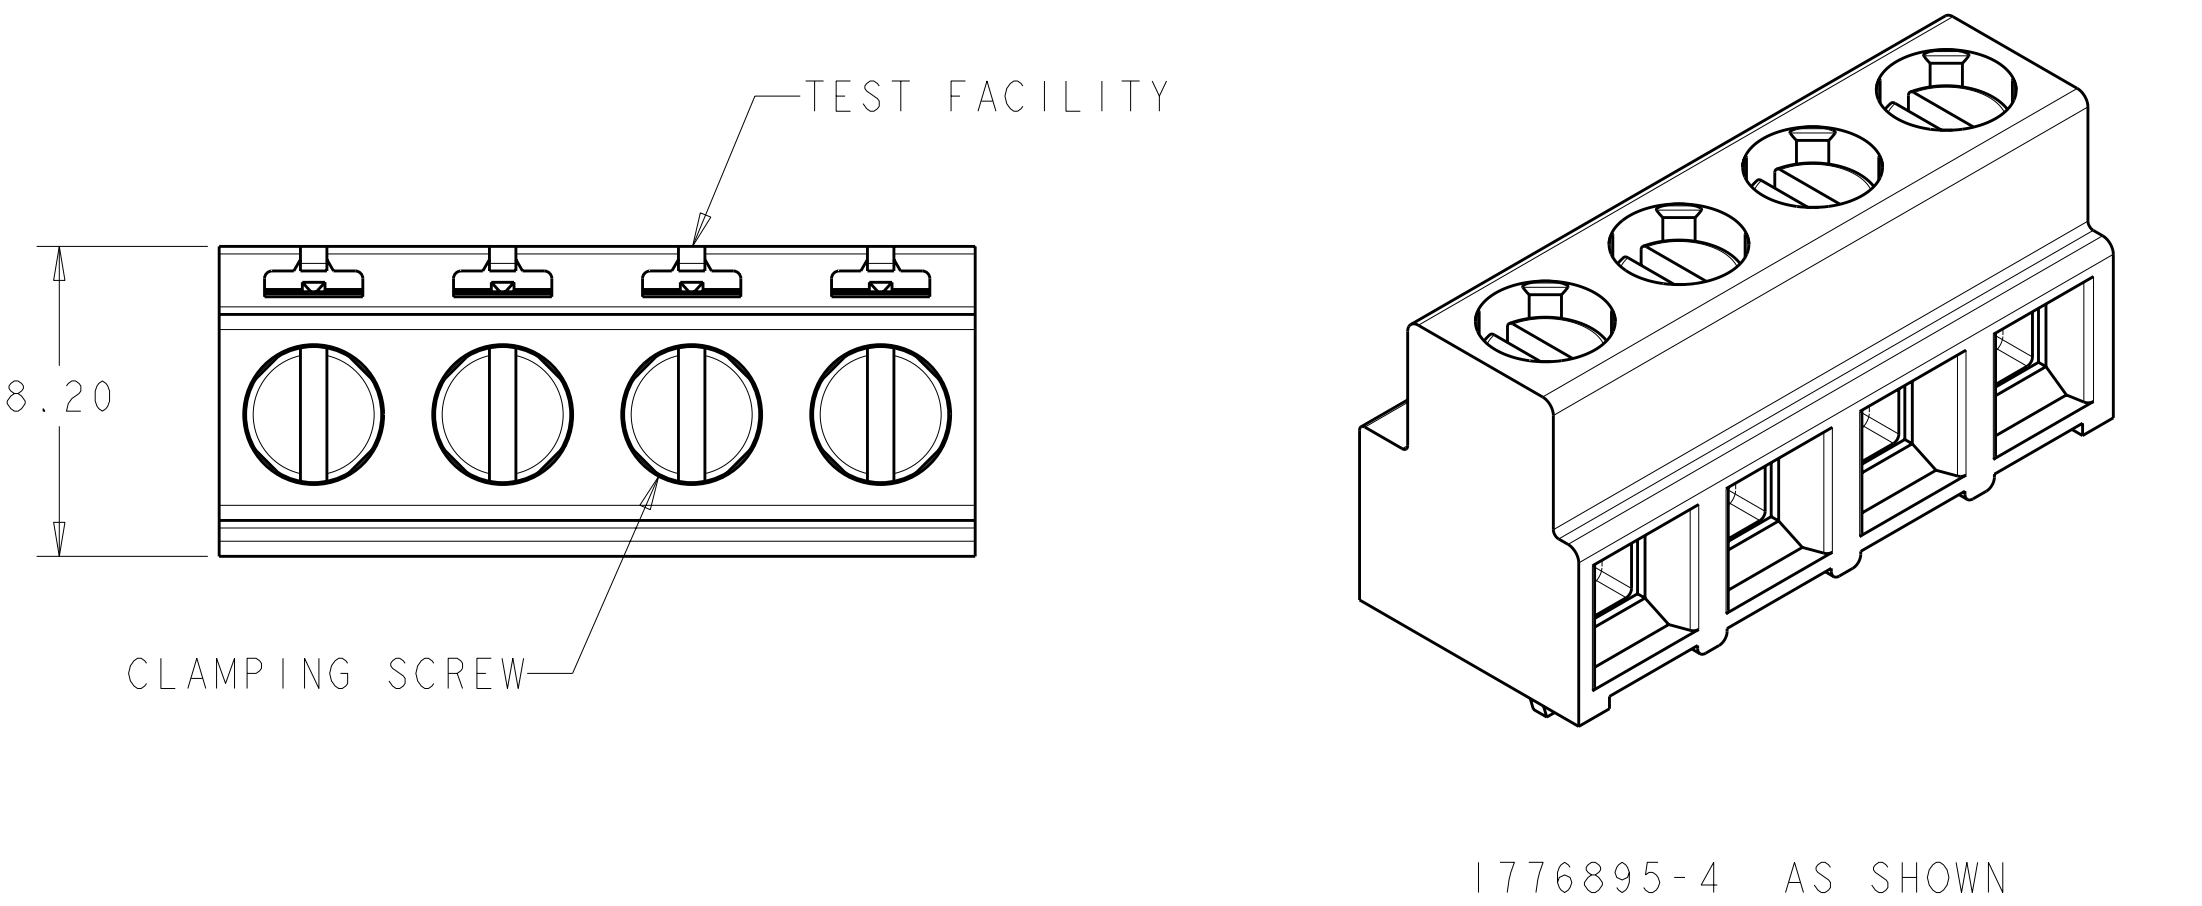


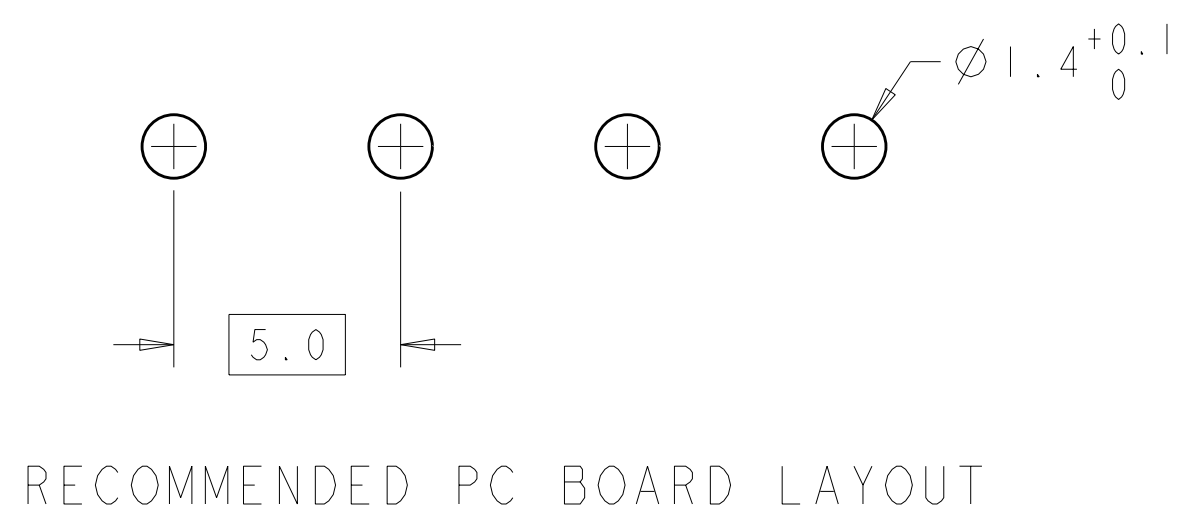

- 1 MATERIAL AND FINISH
HOUSING: HIGH TEMPERATURE POLYAMIDE, UL 94V-O RATED,
COLOR: BLACK
CLAMP: BRASS, NICKEL PLATED.
TERMINAL: BRASS, TIN PLATED.
CLAMPING SCREW: M3, BRASS, NICKEL PLATED.
2. END-TO-END STACKABLE WITHOUT LOSS OF
CENTERLINE SPACING.
3. WIRE SIZE RANGE: 16-30 AWG, SOLID OR STRANDED.
4. TAPE AND REEL PACKAGED.
- 5 24mm KAPTON DOT APPLIED TO PART

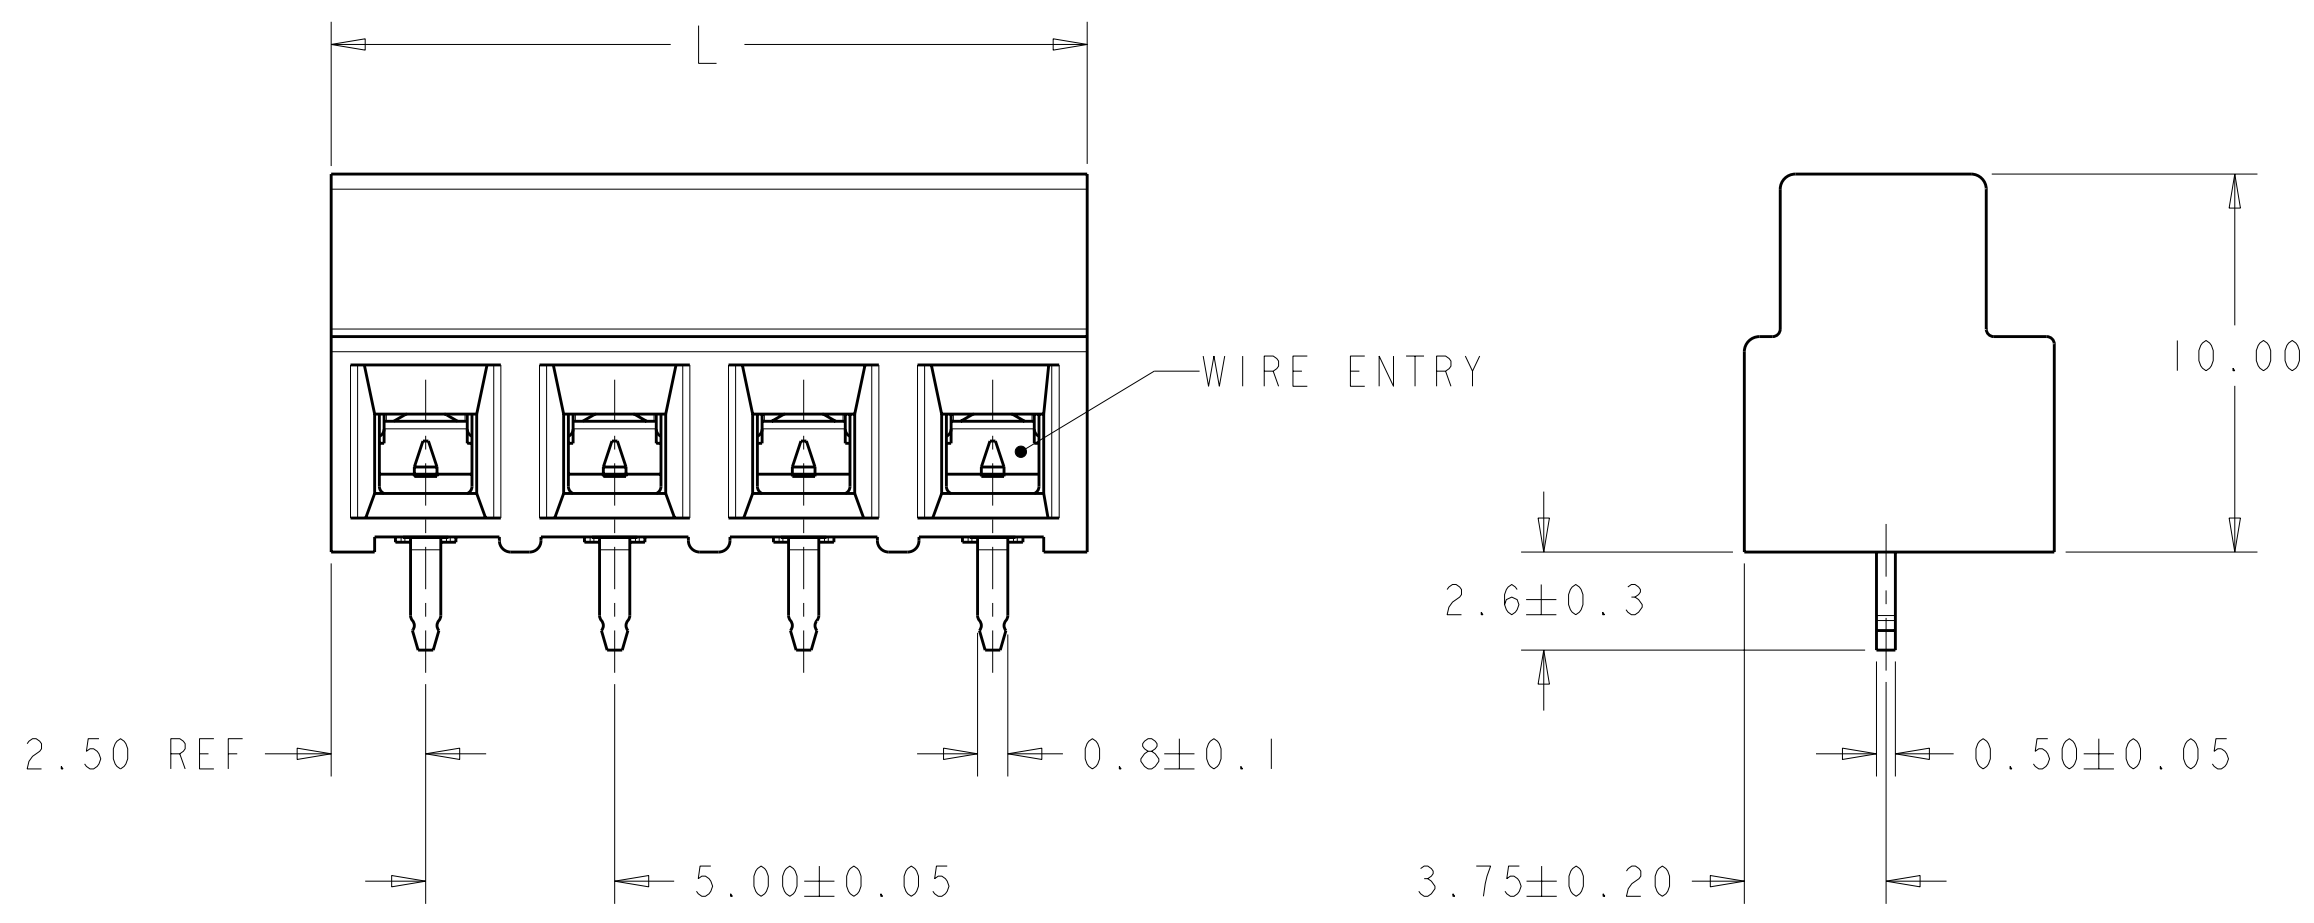

DRAWING IS RESTRICTED TO UTEC

PRELIMINARY	PLASTIC	40.0	8	2-1776895-8
5	CORUGATED PAPER	40.0	8	1-1776895-8
	CORUGATED PAPER	40.0	8	1776895-8
	CORUGATED PAPER	35.0	7	19776895-7
	CORUGATED PAPER	20.0	4	1776895-4
	CORUGATED PAPER	15.0	3	1776895-3
	REEL MATERIAL	A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. WELDON 06OCT2006	TE Connectivity		
DIMENSIONS:		CHK C. RICHARD 06OCT2006			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD C. RICHARD 06OCT2006	NAME TERMINAL BLOCK ASSEMBLY, PCB MOUNT, STACKING, SIDE WIRE ENTRY, WITH INTERLOCK, 5.00mm PITCH		
mm		PRODUCT SPEC	SIZE	CAGE CODE	DRAWING NO
0 PLC ±.2		APPLICATION SPEC	A2	00779	C-1776895
1 PLC ±.15		WEIGHT	RESTRICTED TO		-
2 PLC ±0.000		CUSTOMER DRAWING	SCALE	SHEET	OF
3 PLC ±0.000			5.1	1	1
4 PLC ±0.000					REV B4
ANGLES ±2°					
FINISH					

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1776895-7](#)