

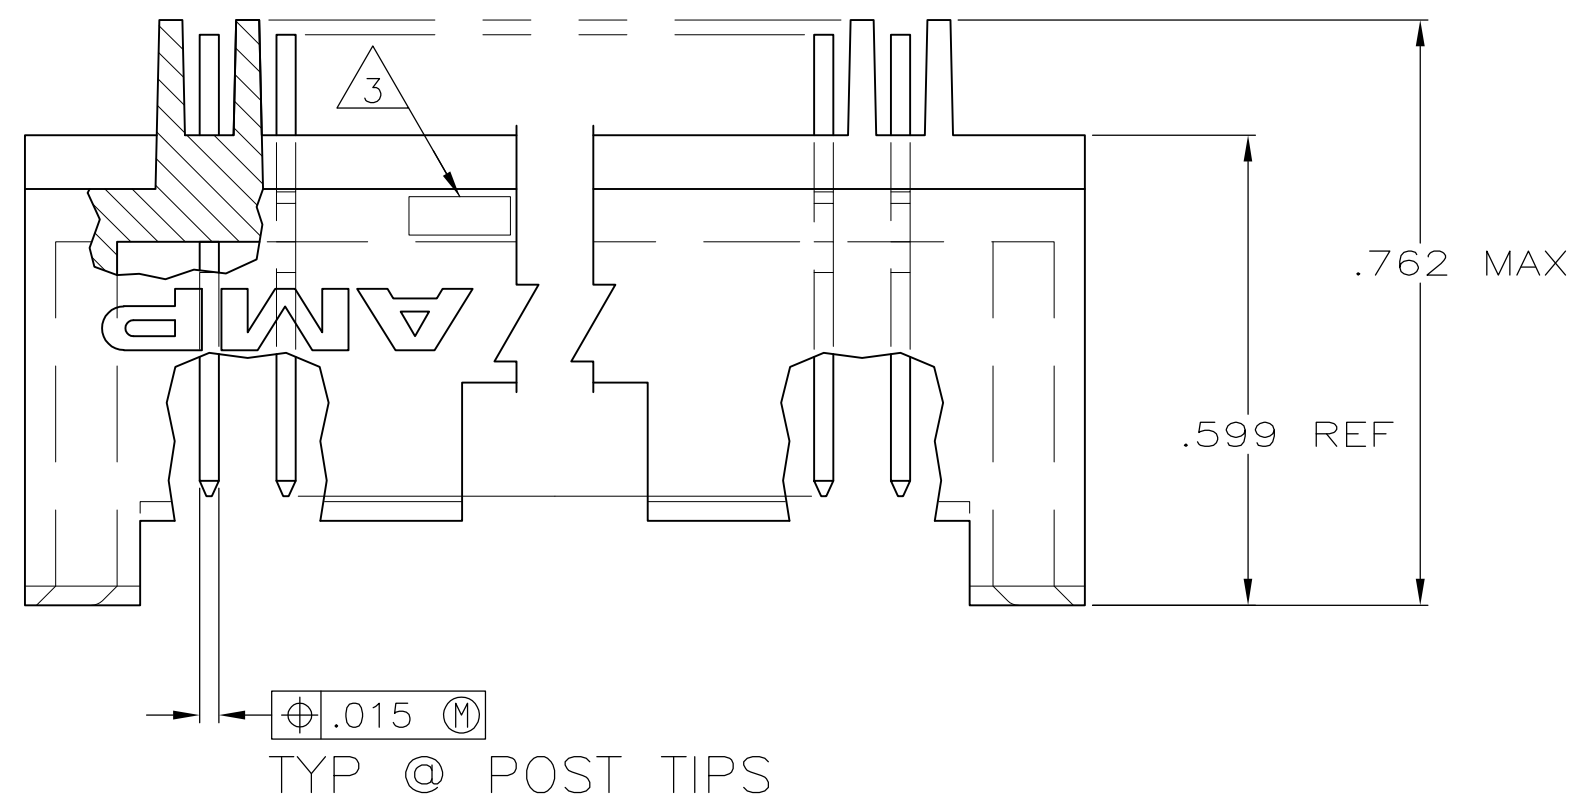



LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	OWN	APVD
			L2	REVISED PER ECO-09-017580	30JUL09	HMR	JO
			L3	REVISED PER ECO-10-000445	20JAN10	KK	HMR

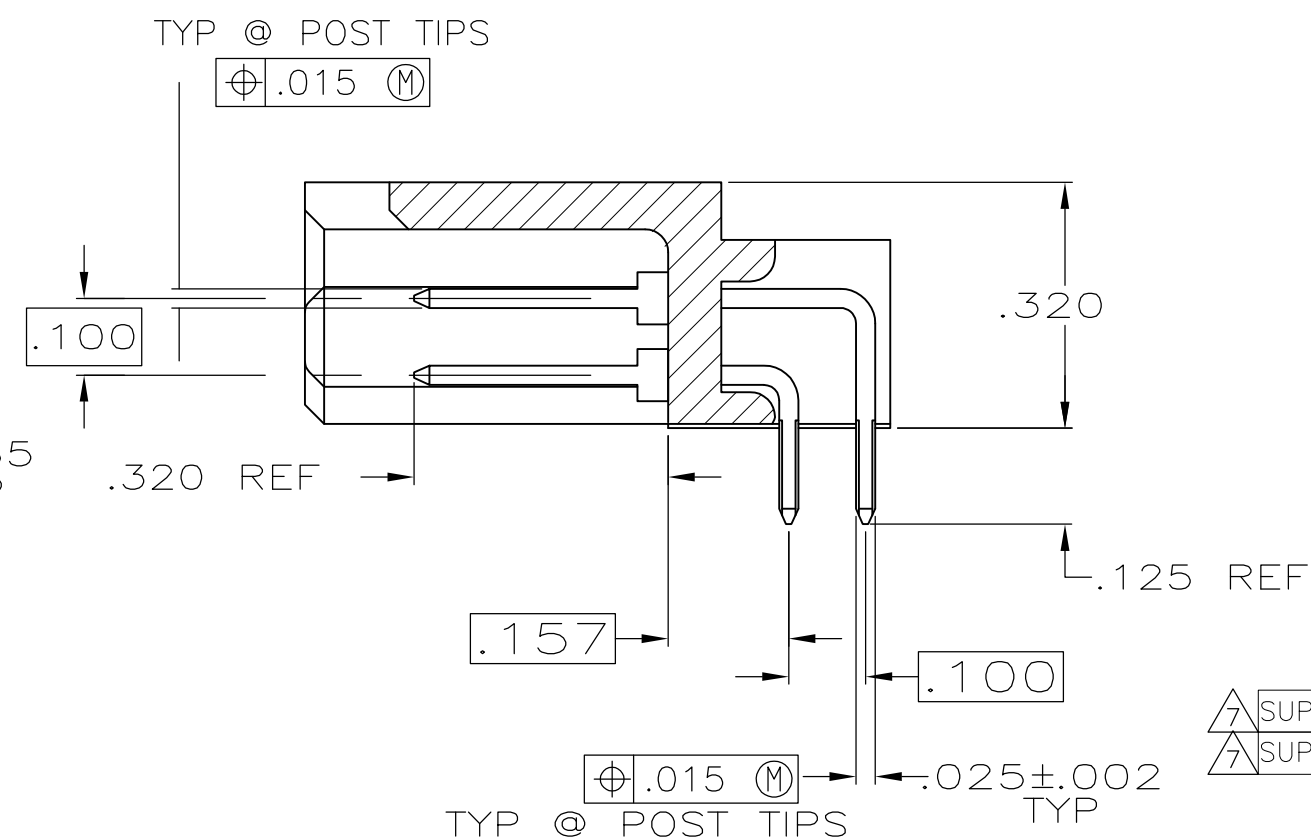

- | | |
|---|--|
| 1 | MATERIAL: HSG FLAME RETARDANT THERMOPLASTIC,
COLOR: BLACK. POSTS: PHOS BRONZE |
| 2 | .000030 GOLD ON CONTACT AREA,
.000100—.000200 BRIGHT TIN-LEAD ON SOLDER
LEADS, ALL OVER .000050 NICKEL |
| 3 | RECESSED DATE CODE AND CSA LOGO |
| 4 | .000030 GOLD ON CONTACT AREA,
.000100—.000200 MATTE TIN ON SOLDER LEADS,
ALL OVER .000050 NICKEL |
| 5 | ROHS 2002/95/EC COMPLIANT |
| 6 | PRELIMINARY PART |
| 7 | OBSOLETE PARTS: OBSOLETE CIS STREAMLINING
PER D.RENAUD/D.SINISI |

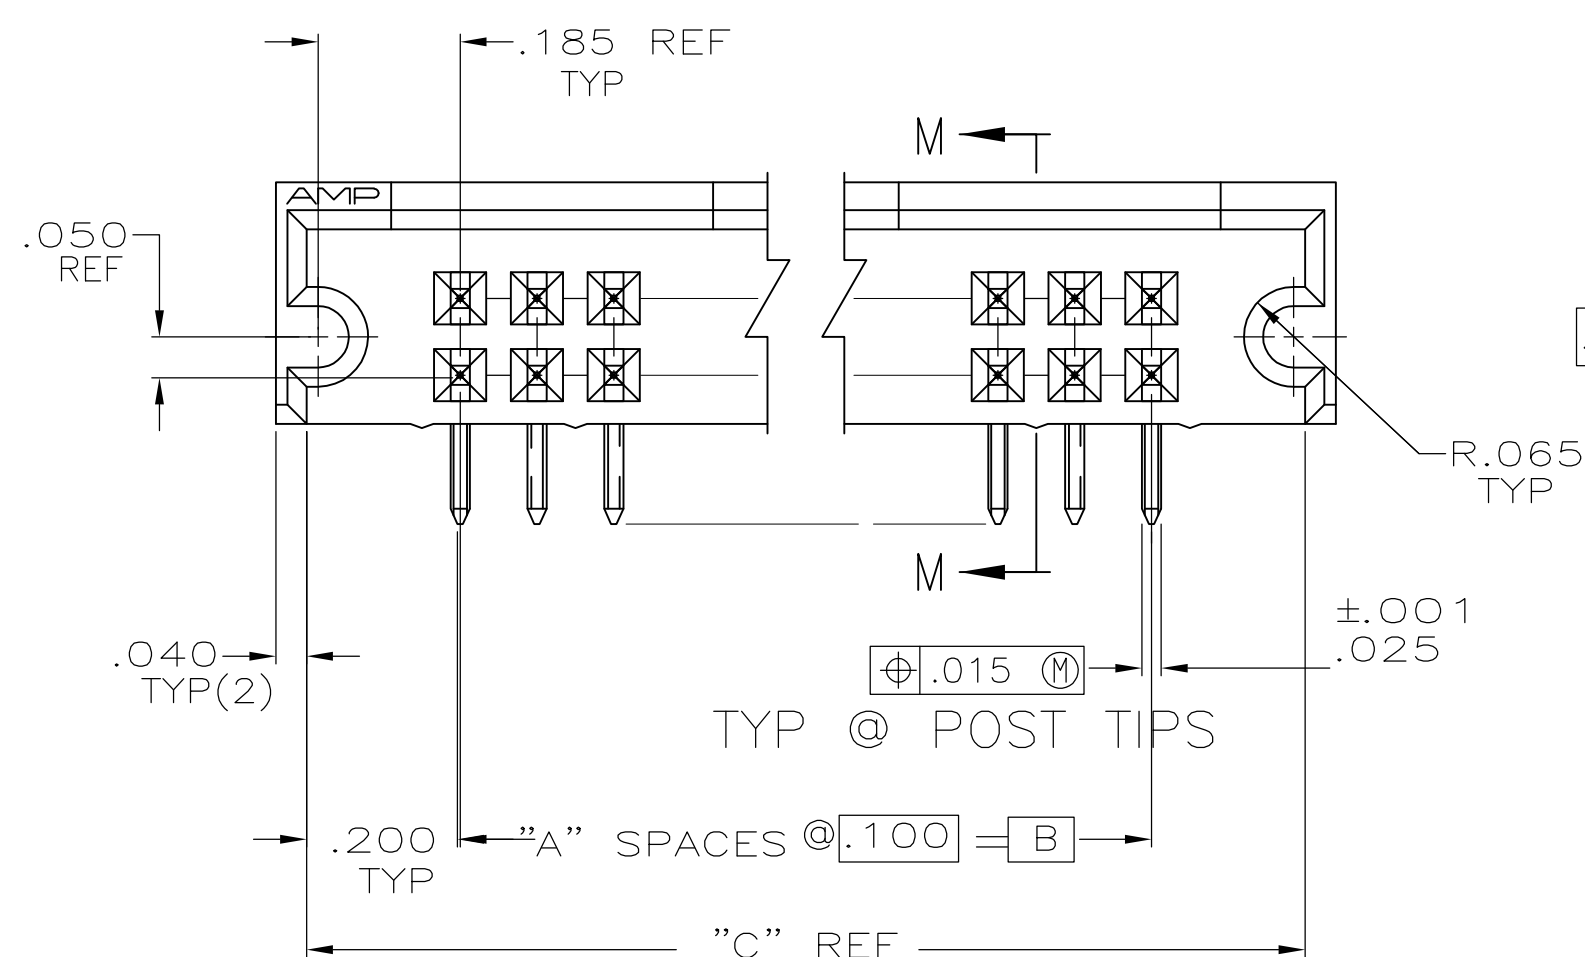

SECTION M-M

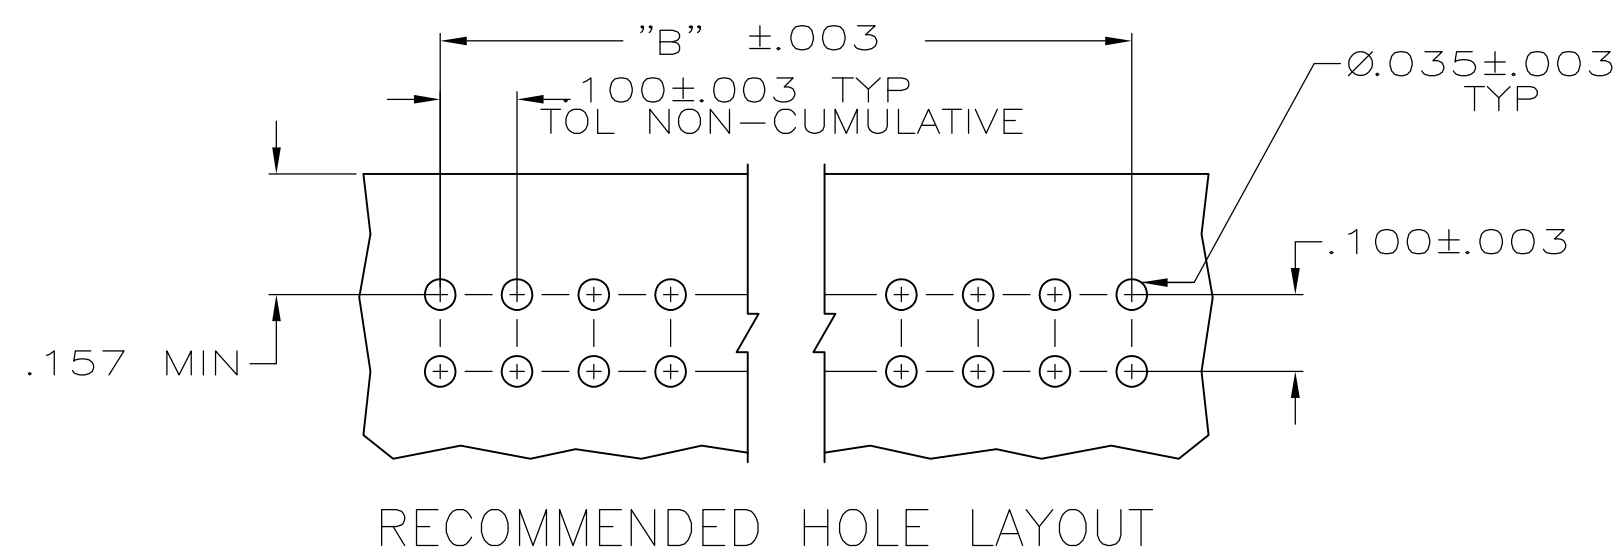

ADS,	4		1.000	.600	6	14	6	7-102802-6
		OBSOLETE	.800	.400	4	10	5	7-102802-5
		OBSOLETE	8.300	7.900	79	160	5	7-102802-4
		OBSOLETE	2.500	2.100	21	44	5	7-102802-3
		OBSOLETE	7.700	7.300	73	148	5	7-102802-2
		OBSOLETE	6.800	6.400	64	130	5	6-102802-9
		OBSOLETE	4.600	4.200	42	86	5	6-102802-8
		OBSOLETE	3.900	3.500	35	72	5	6-102802-7
		OBSOLETE	1.800	1.400	14	30	5	6-102802-6
		OBSOLETE	1.300	.900	9	20	5	6-102802-5
NG	2		1.100	.700	7	16	5	6-102802-4
		OBSOLETE	1.500	1.100	11	24	5	6-102802-3
			.900	.500	5	12	5	6-102802-2
			—	—	—	—		—
		OBSOLETE	4.800	4.400	44	90	5	6-102802-0
			3.300	2.900	29	60	5	5-102802-9
			2.300	1.900	19	40	5	5-102802-8
		OBSOLETE	3.800	3.400	34	70	5	5-102802-7
		OBSOLETE	5.300	4.900	49	100	5	5-102802-6
		OBSOLETE	4.300	3.900	39	80	5	5-102802-5
	4		2.800	2.400	24	50	5	5-102802-4
		OBSOLETE	2.100	1.700	17	36	5	5-102802-3
			6.300	5.900	59	120	5	5-102802-2
			—	—	—	—		—
		OBSOLETE	.800	.400	4	10		2-102802-5
		OBSOLETE	8.300	7.900	79	160		2-102802-4
		OBSOLETE	2.500	2.100	21	44		2-102802-3
		OBSOLETE	7.700	7.300	73	148		2-102802-2
		OBSOLETE	6.800	6.400	64	130		1-102802-9
		OBSOLETE	4.600	4.200	42	86		1-102802-8
BY 6-102802-5	4		3.900	3.500	35	72		1-102802-7
		OBSOLETE	1.800	1.400	14	30		1-102802-6
			1.300	.900	9	20		1-102802-5
		OBSOLETE	1.100	.700	7	16		1-102802-4
		OBSOLETE	1.500	1.100	11	24		1-102802-3
		OBSOLETE	.900	.500	5	12		1-102802-2
			—	—	—	—		—
		OBSOLETE	4.800	4.400	44	90		1-102802-0
			3.300	2.900	29	60		102802-9
			2.300	1.900	19	40		102802-8
BY 6-102802-4	4	OBSOLETE	3.800	3.400	34	70		102802-7
		OBSOLETE	5.300	4.900	49	100		102802-6
		OBSOLETE	4.300	3.900	39	80		102802-5
			2.800	2.400	24	50		102802-4
		OBSOLETE	2.100	1.700	17	36		102802-3
		OBSOLETE	6.300	5.900	59	120		102802-2
			—	—	—	—		—
		FINISH	”C”	”B”	”A”	NO OF POSN	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. HAYMAKER		30MAR00		 Tyco Electronics Corporation Harrisburg, PA 17105-3608	
		CHK J. GESFORD		30MAR00			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.13[.005] 4 PLC ± ± - ANGLES		APVD J. GESFORD		NAME ASSY, HEADER, MOD II, .025 SQ POSTS .100X.100CL, DOUBLE ROW, RIGHT ANGLE WITH GUIDE PINS	
				PRODUCT SPEC			
				—			
				APPLICATION SPEC			
		—					
MATERIAL		FINISH		WEIGHT		RESTRICTED TO	
		SEE TABLE		—		—	
CUSTOMER DRAWING						SCALE 4:1	
						SHEET 1 OF 1	
						REV 13	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-102802-6](#)