

## Double Pole, Electrically Held, 1 Amp and Less

MA, MAD, MADD

**MA**  
**Standard TO-5**  
**High Performance Relay**  
**Qualified to**  
**MIL-R-39016/9**




Terminal View

**MAD**  
**Standard TO-5**  
**Diode Suppressed**  
**High Performance Relay**  
**Qualified to**  
**MIL-R-39016/15**



Terminal View

**MADD**  
**Standard TO-5 Diode**  
**Suppressed/Protected**  
**High Performance Relay**  
**Qualified to**  
**MIL-R-39016/20**



Terminal View

**Product Facts**

- Hermetically sealed
- High shock & vibration ratings
- Spreader pads
- Excellent RF switching

**Product Facts**

- Suppression diode
- Hermetically sealed
- High shock & vibration ratings
- Spreader pads
- Excellent RF switching

**Product Facts**

- Suppression & protection diodes
- Hermetically sealed
- High shock & vibration ratings
- Spreader pads
- Excellent RF switching

**Electrical Characteristics**

**Contact Arrangement** —  
 2 Form C (DPDT)

**Contact Material** —  
 Stationary —  
 Gold/platinum/palladium/silver alloy (gold plated)  
 Moveable —  
 Gold/platinum/palladium/silver alloy (gold plated)

**Contact Resistance** —  
 Before Life — 100 milliohms max. (measured @ 10 mA @ 6 Vdc)  
 After Life — 200 milliohms max. (measured @ 1 A @ 28 Vdc)

**Mechanical Life Expectancy** —  
 1 million operations

**Coil Voltage** —  
 5 to 30 Vdc (MA/MAD)  
 5 to 26.5 Vdc (MADD)

**Coil Power** — 675 mW max. @ 25°C

**Duty Cycle** — Continuous

**Pick-up Voltage** — Approximately 50% of nominal coil voltage


**Pick-up Sensitivity** —  
 130 mW max. @ 25°C

**Contact Ratings**

| Contact Load                     | Type                          | Operations Min. |
|----------------------------------|-------------------------------|-----------------|
| 1.0 A @ 28 Vdc                   | Resistive                     | 100,000         |
| 250 mA @ 115 Vac, 60 Hz & 400 Hz | Resistive (case not grounded) | 100,000         |
| 100 mA @ 115 Vac, 60 Hz & 400 Hz | Resistive                     | 100,000         |
| 0.2 A @ 28 Vdc                   | Inductive (0.32 Henry)        | 100,000         |
| 0.1 A @ 28 Vdc                   | Lamp                          | 100,000         |
| 30 µA @ 50 mVdc                  | Low Level                     | 1,000,000       |
| 0.1 A @ 28 Vdc                   | Intermediate Current          | 50,000          |



Enclosure



## Double Pole, Electrically Held, 1 Amp and Less (Continued)

**MA, MAD, MADD (Continued)**

**Operating Characteristics**

**Timing** —  
 Operate Time — 2.0 ms max.  
 Release Time —  
 MA — 1.5 ms max.  
 MAD/MADD — 4.0 ms max.  
 (suppression diode, suppression/  
 steering diodes)

**Contact Bounce** — 1.5 ms max

**Dielectric Withstanding Voltage** —

Between Open Contacts —  
 500 Vrms 60 Hz  
 Between Adjacent Contacts —  
 500 Vrms 60 Hz  
 Between Contacts & Coil —  
 500 Vrms 60 Hz

**Insulation Resistance** —  
 10,000 megohms min. @ 500 Vdc  
 1,000 megohms @ 500 Vdc  
 (coil to case @ +125°C)

**Environmental Characteristics**

**Temperature Range** —  
 -65°C to +125°C  
**Weight** —  
 0.09 oz. (2.55 grms)  
 0.10 oz. (2.80 grms) with spreader pad  
 attached

**Vibration Resistance** —

30 G's, 10 to 3,000 Hz

**Shock Resistance** —


75 G's, 6 ±1 ms max.

**QPL Approval** —

MIL-R-39016/9 (JMA)  
 MIL-R-39016/15 (JMAD)  
 MIL-R-39016/20 (JMADD)

**Semiconductor Characteristics**

**Diode** —  
 100 Vdc peak inverse voltage (PIV)  
 1.0 Vdc max. transient voltage

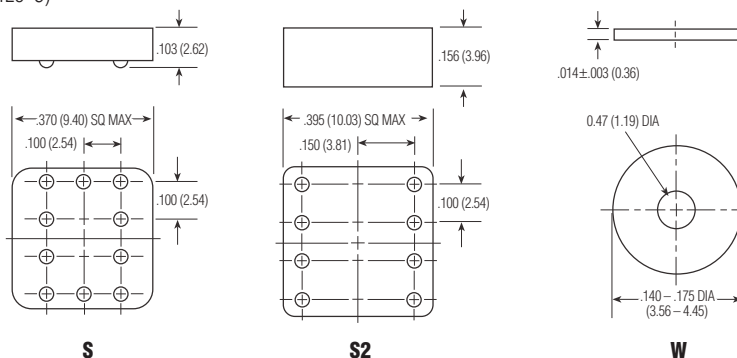

Spreader & Mounting Pads

**Coil Data**

| Nom. Coil Voltage (Vdc) | Coil Resistance in Ohms ±10% @ 25°C (Note 1) | Coil Circuit Current mA (Max.) (Note 1&2) | Coil Circuit Current mA (Min.) (Note 1&2) | Pickup Voltage Vdc (Max.) @ 25°C (Note 2) | Base Turn On Current mA (Max.) @ 25°C | Pickup Voltage Vdc (Max.) @ 125°C (Note 2) | Base Turn On Current mA (Max.) @ 125°C | Drop-Out Voltage Vdc (Min.) @ 25°C (Note 2) | Drop-Out Voltage Vdc (Min.) @ -65°C (Note 2) | Nom. Coil Power (mW) @ 25°C | Max. Coil Voltage | Coil Desig. |
|-------------------------|--|---|---|---|---------------------------------------|--|--|---|--|-----------------------------|-------------------|-------------|
| <b>MA/MAD</b>           |  |   |   |   |                                       |  |  |   |  |                             |                   |             |
| 5.0                     | 50   | n/a                                       | n/a                                       | 2.7                                       | n/a                                   | 3.5  | n/a                                    | 0.22  | 0.14   | 500                         | 5.8               | 5           |
| 6.0                     | 98   | n/a                                       | n/a                                       | 3.5                                       | n/a                                   | 4.5  | n/a                                    | 0.28  | 0.18   | 367                         | 8.0               | 6           |
| 9.0                     | 220  | n/a                                       | n/a                                       | 5.3                                       | n/a                                   | 6.8  | n/a                                    | 0.54  | 0.35   | 368                         | 12.0              | 9           |
| 12.0                    | 390  | n/a                                       | n/a                                       | 7.0                                       | n/a                                   | 9.0  | n/a                                    | 0.63  | 0.41   | 369                         | 16.0              | 12          |
| 18.0                    | 880  | n/a                                       | n/a                                       | 10.5                                      | n/a                                   | 13.5                                       | n/a                                    | 0.91  | 0.59   | 368                         | 24.0              | 18          |
| 26.5                    | 1,560  | n/a                                       | n/a                                       | 14.2                                      | n/a                                   | 18.0                                       | n/a                                    | 1.37  | 0.89   | 450                         | 32.0              | 26          |
| 30.0                    | 2,500  | n/a                                       | n/a                                       | 17.7                                      | n/a                                   | 22.0                                       | n/a                                    | 1.50  | 1.00   | 360                         | 36.0              | 30          |
| <b>MADD</b>             |  |   |   |   |                                       |  |  |   |  |                             |                   |             |
| 5.0                     | 39   | 128.2                                     | 93.2                                      | 3.2                                       | n/a                                   | 4.0  | n/a                                    | 0.6   | 0.6  | 641                         | 5.8               | 5           |
| 6.0                     | 78   | 78.3                                      | 58.3                                      | 4.0                                       | n/a                                   | 5.0  | n/a                                    | 0.7   | 0.7  | 462                         | 8.0               | 6           |
| 9.0                     | 220  | 42.9                                      | 33.0                                      | 6.3                                       | n/a                                   | 7.8  | n/a                                    | 0.9   | 0.8  | 368                         | 12.0              | 9           |
| 12.0                    | 390  | 32.8                                      | 25.6                                      | 8.0                                       | n/a                                   | 10.0                                       | n/a                                    | 1.1   | 0.9  | 369                         | 16.0              | 12          |
| 18.0                    | 880  | 22.1                                      | 17.5                                      | 11.5                                      | n/a                                   | 14.5                                       | n/a                                    | 1.4   | 1.1  | 368                         | 24.0              | 18          |
| 26.5                    | 1,560  | 18.5                                      | 14.8                                      | 15.2                                      | n/a                                   | 19.0                                       | n/a                                    | 1.8   | 1.4  | 450                         | 32.0              | 26          |

**Notes:** 1. Coil resistance not directly measurable. Coil current should be within limits shown when tested at nominal voltage at 25°C for 5 seconds max.  
 2. Set base current at 3 mA to 15 mA during measurements.

**Ordering Instructions**

Catalog-selected Relays: The catalog number is derived by choosing the proper CODE for each of the relay characteristics in the order in which the codes are listed.

**Specifying a Part Number Example:**

|             |                 |               |                    |              |                               |
|-------------|-----------------|---------------|--------------------|--------------|-------------------------------|
| <b>Type</b> | <b>Terminal</b> | <b>Diodes</b> | <b>Ground Pins</b> | <b>Coils</b> | <b>Spreader/Mounting Pads</b> |
| MA          | C               | D             | G                  | -26          | S                             |

\* The part number example shown on this page is for catalog items. For a list of specific QPL part numbers, please see the index in Section 15.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[J1MAWD-26XP](#)