


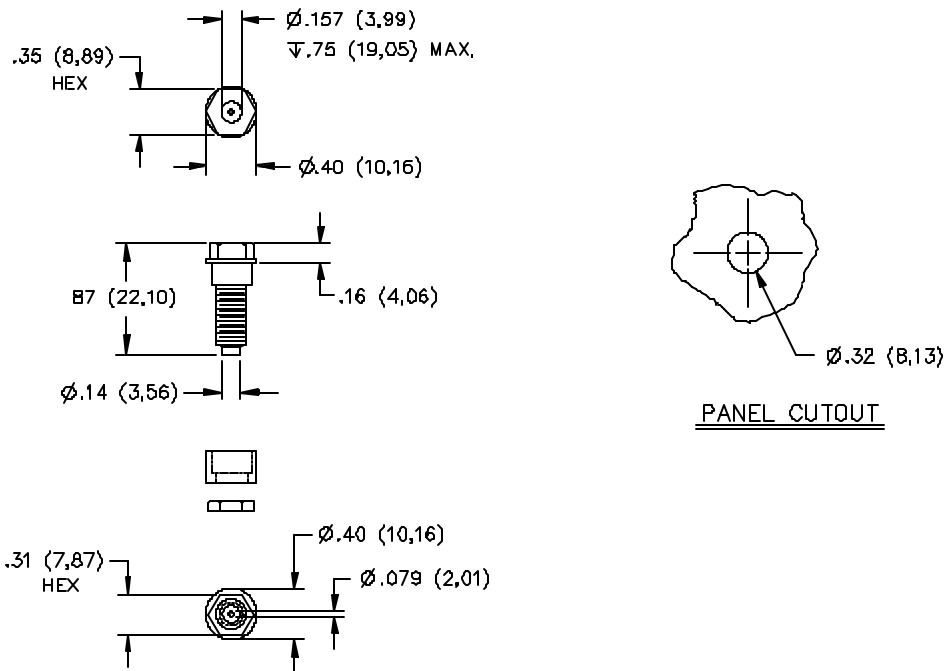

Recommended Maximum Panel Thickness: .28" (7,0mm)

### FEATURES:

- Ideal for panel mount applications.
- .079" (2mm) opening at bottom of jack enables solder type wire attachment.

### MATERIALS:

Insulator & Collars: Nylon, Color Per Part Number

Banana Jack & Nut: Brass, Nickel Plated

### RATINGS:

Operating Voltage: 750 VRMS Max.

Current: 20 Amperes Max.

### ORDERING INFORMATION: Model 5933-\*

\* = Color Code, Standard Colors: -0 Black, -2 Red, -4 Yellow, -5 Green, -6 Blue, -9 White

Sold in packages of ten per color.

All dimensions are in inches. Tolerances (except noted): .xx =  $\pm .02$ " (.51 mm), .xxx =  $\pm .005$ " (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pomona:

[5933-6](#) [5933-0](#) [5933-9](#) [5933-4](#) [5933-5](#) [5933-2](#)