



LOC		DIST		REVISIONS					
GE		00		P	LTR	DESCRIPTION	DATE	DWN	APVD
					E1	REVISED PER ECO-11-005030	26APR2011	RK	HMR

1 MATERIAL: 0.30 THICK COPPER ALLOY, PREPLATED WITH 0.0008 MINIMUM THICK REFLOW TIN OR BRIGHT TIN (ELV COMPLIANT).

ALTERNATE MATERIAL: 0.30 THICK COPPER ALLOY, PREPLATED WITH 0.0008 MINIMUM THICK BRIGHT TIN (ELV COMPLIANT).

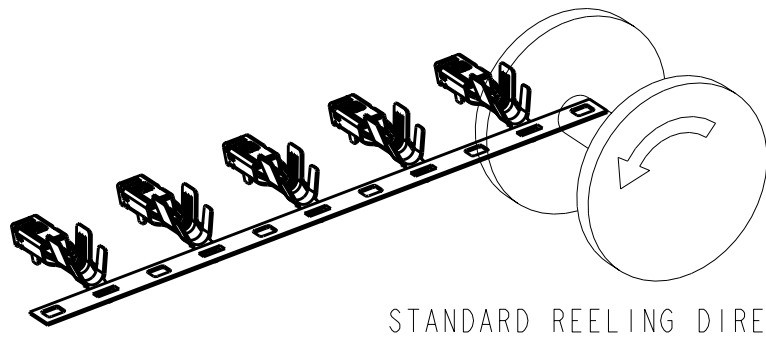


STANDARD REELING DIRECTION

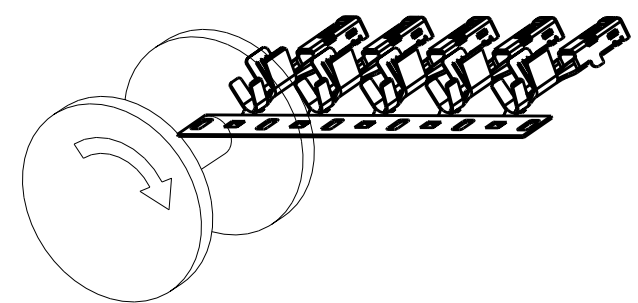

REVERSE REELING DIRECTION

4. QUALIFICATION OF THE CRIMP APPLICATION TOOLING SHALL BE CONTROLLED BY THE REQUIREMENTS ESTABLISHED UNDER USCAR 21.
5. LOOSE END SPLICING TO BE USED.

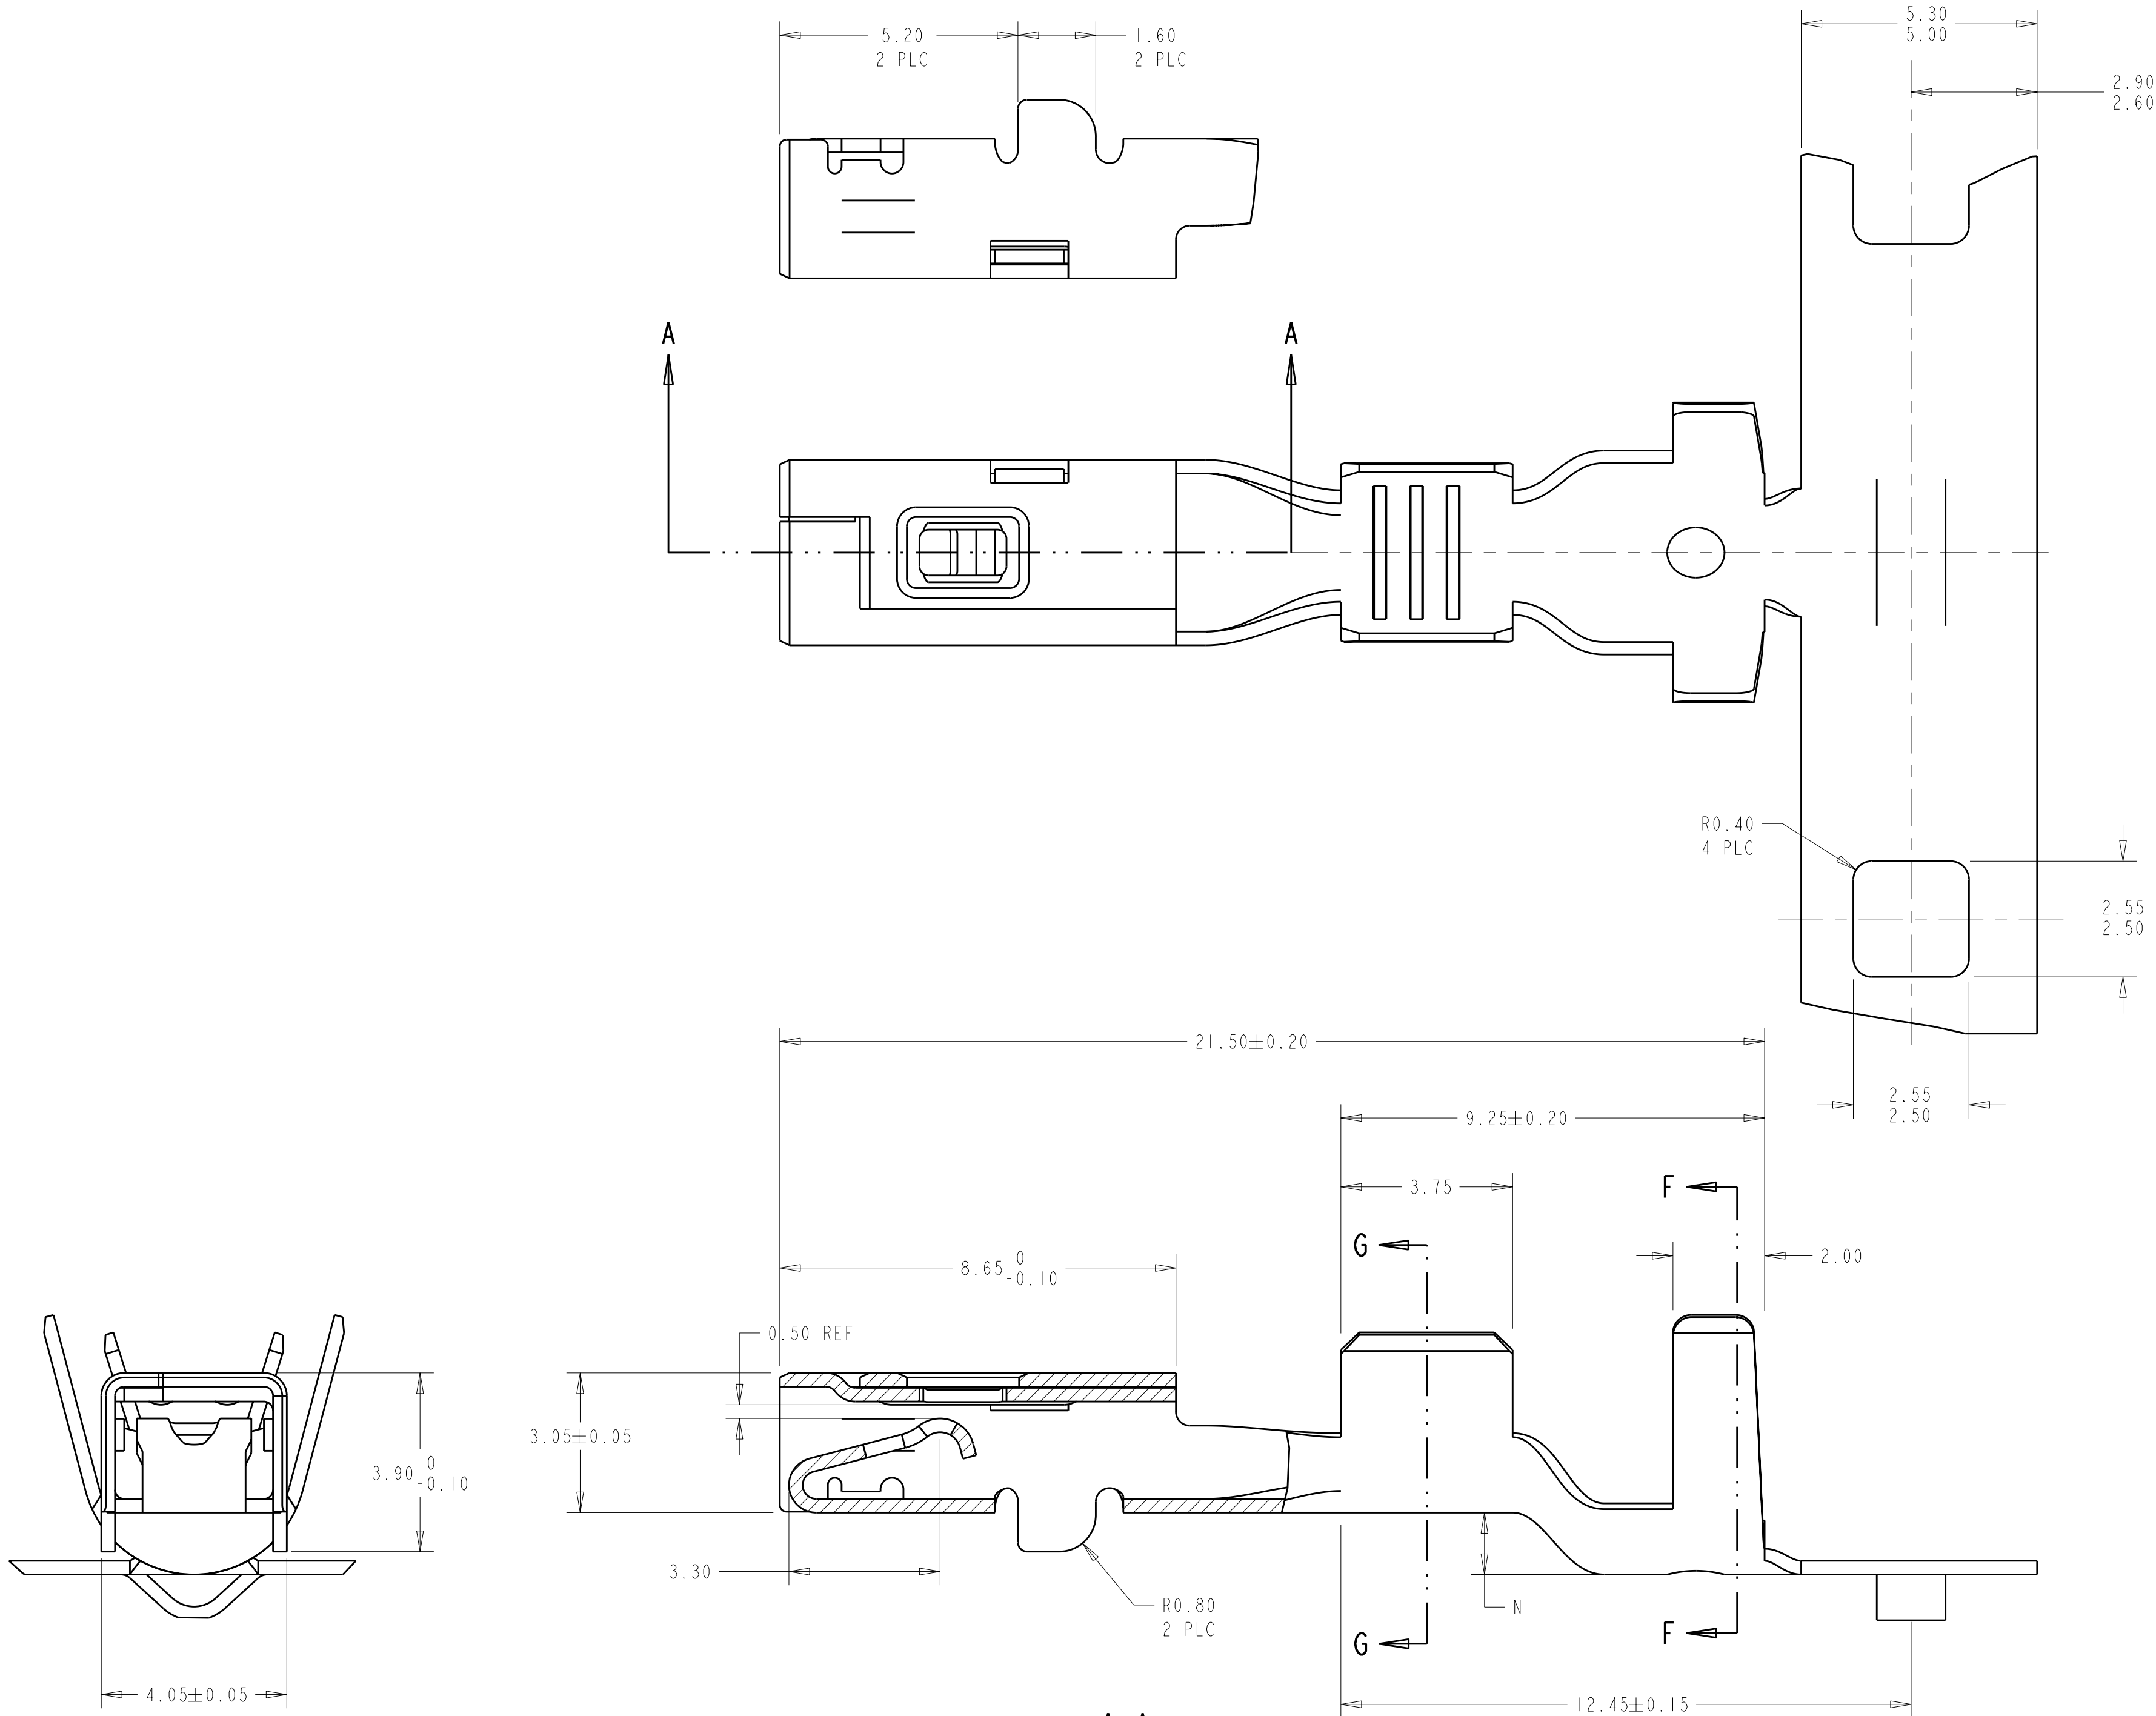

SECTION A-A

SECTION F-F

SECTION G-G

3	1326032-6 REELED FOR AMP APPLICATORS							12 AWG	I-1326032-2
	1326032-5 REELED FOR AMP APPLICATORS							14 AWG	I-1326032-1
	1326032-4 REELED FOR AMP APPLICATORS							16 AWG	I-1326032-
	1326032-3 REELED FOR AMP APPLICATORS							18 AWG	1326032-9
	1326032-2 REELED FOR AMP APPLICATORS							20 AWG	1326032-8
	1326032-1 REELED FOR AMP APPLICATORS							22 AWG	1326032-7
2	1.35	6.8	4.30	6.09	4.7	2.70	5.25	12 AWG	1326032-6
	1.35	6.5	4.30	5.62	3.9	1.70	3.88	14 AWG	1326032-5
	1.10	5.6	3.80	4.54	3.9	1.70	3.88	16 AWG	1326032-4
	1.10	5.6	3.80	4.54	3.3	1.30	2.76	18 AWG	1326032-3
	0.90	5.0	3.40	4.11	3.3	1.30	2.76	20 AWG	1326032-2
	0.90	5.0	3.40	4.11	2.5	0.90	2.11	22 AWG	1326032-1
REELING	N	L	ØK	J	H	ØF	E	WIRE SIZE	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN D. STRAUSSER 28APR99		TE Connectivity			
CHK D. BROWN 28APR99				APVD D. BROWN 28APR99		NAME			
DIMENSIONS: mm				TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC			
9 PLC ±0.3				1 PLC ±0.10		SAE/USCAR-2 8/97			
3 PLC ±				5 PLC ±		APPLICATION SPEC			
4 PLC ±				ANGLES ±4°		114-13013			
FINISH				WEIGHT		SIZE CAGE CODE DRAWING NO			
MATERIAL				CUSTOMER DRAWING		A1 00779 C=1326032			
						RESTRICTED TO			
						SCALE 10:1 SHEET 1 OF 1 REV E1			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1326032-4](#)