

THIS DRAWING IS UNPUBLISHED

RELEASED FOR PUBLICATION

© COPYRIGHT

By

ALL RIGHTS RESERVED

LOC

AD

DIST

00

REVISIONS

P

LIR

DESCRIPTION

DATE _____

NAME _____

APVT

NO

55.05


50

11 004507

1.1MAD1

RIK

1881

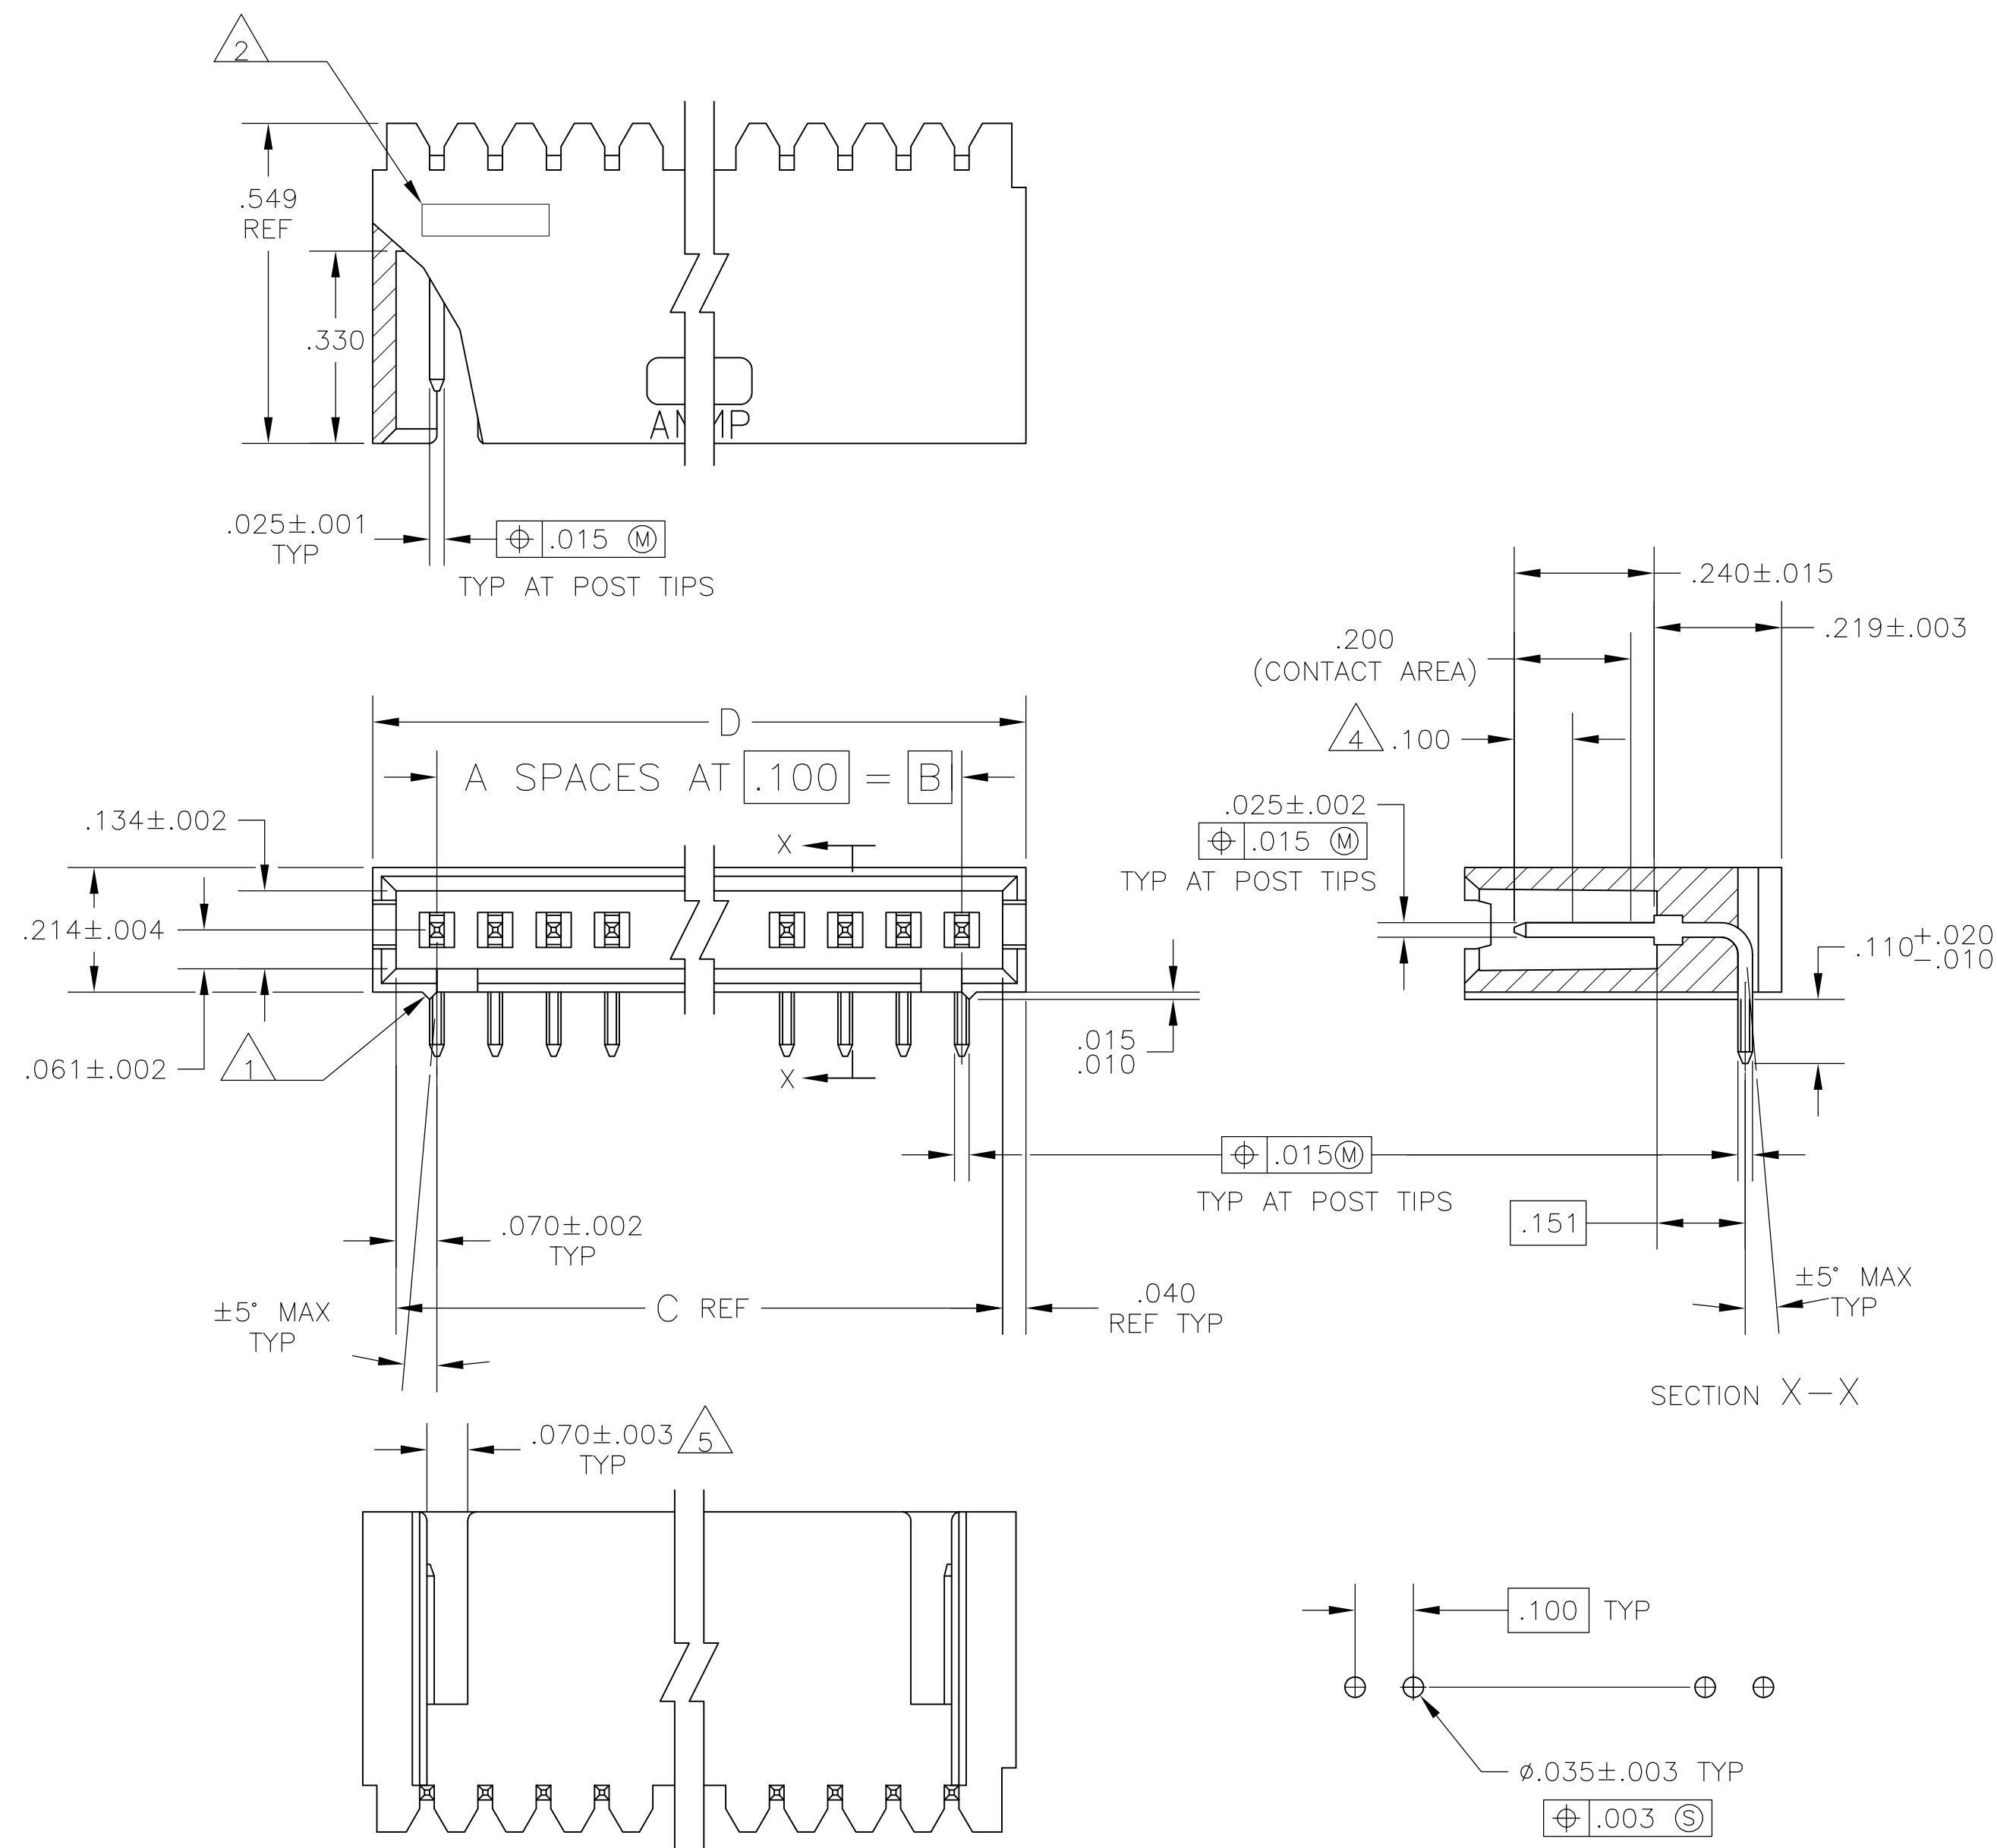

RECOMMENDED HOLE LAYOUT

STANDOFFS:

3 TRHU 9 POSN - (2 REQD) ON OUTSIDE ENDS OF HOUSING

10 THRU 18 POSN - (3 REQD) TWO ON OUTSIDE ENDS AND ONE CENTERED ON HOUSING

19 POSN AND LARGER - (4 REQD) TWO ON OUTSIDE ENDS AND TWO EVENLY SPACED WITHIN REMAINING LENGTH OF HOUSING

 RECESSED DATE CODE

3 .000030 GOLD IN CONTACT AREA, .000100-.000200 MATTE TIN-LEAD IN SOLDER AREA,
ALL OVER .000050 MIN NICKEL

 POINT OF MEASUREMENT FOR GOLD PLATING THICKNESS

 FOR 3 POS ONLY, ONE SLOT .215 WIDE.

6 .000030 GOLD IN CONTACT AREA, .000100—.000200 MATTE TIN IN SOLDER AREA,
ALL OVER .000050 MIN NICKEL

7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

△	OBSELETE	△	2.620	2.540	2.400	24	25	-7-103361-3
		△	2.520	2.440	2.300	23	24	7-103361-2
	OBSELETE	△	2.420	2.340	2.200	22	23	-7-103361-1
		△	2.320	2.240	2.100	21	22	-7-103361-0
		△	2.220	2.140	2.000	20	21	-6-103361-9
		△	2.120	2.040	1.900	19	20	6-103361-8
	OBSELETE	△	2.020	1.940	1.800	18	19	-6-103361-7
		△	1.920	1.840	1.700	17	18	-6-103361-6
		△	1.820	1.740	1.600	16	17	-6-103361-5
		△	1.720	1.640	1.500	15	16	6-103361-4
△	OBSELETE	△	1.620	1.540	1.400	14	15	-6-103361-3
		△	1.520	1.440	1.300	13	14	6-103361-2
△	OBSELETE	△	1.420	1.340	1.200	12	13	-6-103361-1
		△	1.320	1.240	1.100	11	12	6-103361-0
△	OBSELETE	△	1.220	1.140	1.000	10	11	-5-103361-9
		△	1.120	1.040	.900	9	10	5-103361-8
		△	1.020	.940	.800	8	9	5-103361-7
		△	.920	.840	.700	7	8	5-103361-6
		△	.820	.740	.600	6	7	5-103361-5
		△	.720	.640	.500	5	6	5-103361-4
		△	.620	.540	.400	4	5	5-103361-3
		△	.520	.440	.300	3	4	5-103361-2
		△	.420	.340	.200	2	3	5-103361-1
	OBSELETE	△	3.720	3.640	3.500	35	36	3-103361-4
	OBSELETE	△	3.620	3.540	3.400	34	35	3-103361-3
	OBSELETE	△	3.520	3.440	3.300	33	34	3-103361-2
	OBSELETE	△	3.420	3.340	3.200	32	33	3-103361-1
	OBSELETE	△	3.320	3.240	3.100	31	32	3-103361-0
	OBSELETE	△	3.220	3.140	3.000	30	31	2-103361-9
	OBSELETE	△	3.120	3.040	2.900	29	30	2-103361-8
	OBSELETE	△	3.020	2.940	2.800	28	29	2-103361-7
	OBSELETE	△	2.920	2.840	2.700	27	28	2-103361-6
	OBSELETE	△	2.820	2.740	2.600	26	27	2-103361-5
	OBSELETE	△	2.720	2.640	2.500	25	26	2-103361-4
△	OBSELETE	△	2.620	2.540	2.400	24	25	-2-103361-3
		△	2.520	2.440	2.300	23	24	2-103361-2
	OBSELETE	△	2.420	2.340	2.200	22	23	-2-103361-1
		△	2.320	2.240	2.100	21	22	-2-103361-0
		△	2.220	2.140	2.000	20	21	-1-103361-9
		△	2.120	2.040	1.900	19	20	1-103361-8
	OBSELETE	△	2.020	1.940	1.800	18	19	-1-103361-7
		△	1.920	1.840	1.700	17	18	-1-103361-6
		△	1.820	1.740	1.600	16	17	-1-103361-5
		△	1.720	1.640	1.500	15	16	1-103361-4
△	OBSELETE	△	1.620	1.540	1.400	14	15	-1-103361-3
		△	1.520	1.440	1.300	13	14	1-103361-2
		△	1.420	1.340	1.200	12	13	1-103361-1
		△	1.320	1.240	1.100	11	12	1-103361-0
△	OBSELETE	△	1.220	1.140	1.000	10	11	-103361-9
		△	1.120	1.040	.900	9	10	103361-8
		△	1.020	.940	.800	8	9	103361-7
		△	.920	.840	.700	7	8	103361-6
		△	.820	.740	.600	6	7	103361-5
		△	.720	.640	.500	5	6	103361-4
		△	.620	.540	.400	4	5	103361-3
		△	.520	.440	.300	3	4	103361-2
		△	.420	.340	.200	2	3	103361-1
	PLATING	D	C	B	A	NO. OF POSN.	PART NO.	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 28SEP89 S.A. SHUEY GWR 30CTR89 H. MOLL R. FLICKER 30CTR89		 TE Connectivity	
DIMENSIONS: INCHES 		TOLERANCES, UNLESS OTHERWISE SPECIFIED: 0. PLC ± . 1. PLC ± . 2. PLC ± . 3. PLC ± .005 4. PLC ± . ANGLES ± . FINISH SEE TABLE		NAME HEADER ASSEMBLY, MOD II, SINGLE ROW .100 CL, RIGHT ANGLE -	
MATERIAL HOUSING, FLAME RETARDANT THERMOPLASTIC POSTFIRE BRONZE		APPLICATION SPEC WEIGHT - CUSTOMER DRAWING		SIZE GAGE CODE DRAWING NO A1 00779 C-103361 SCALE 4:1 SHEET 1 OF 1 REV. N	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[103361-8](#)