



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	D1	REDRAWN PER ECR 09-005983	13MAR09	JR	TM
	D2	REVISED PER ECO-17-013201	12SEP2017	RS	DR

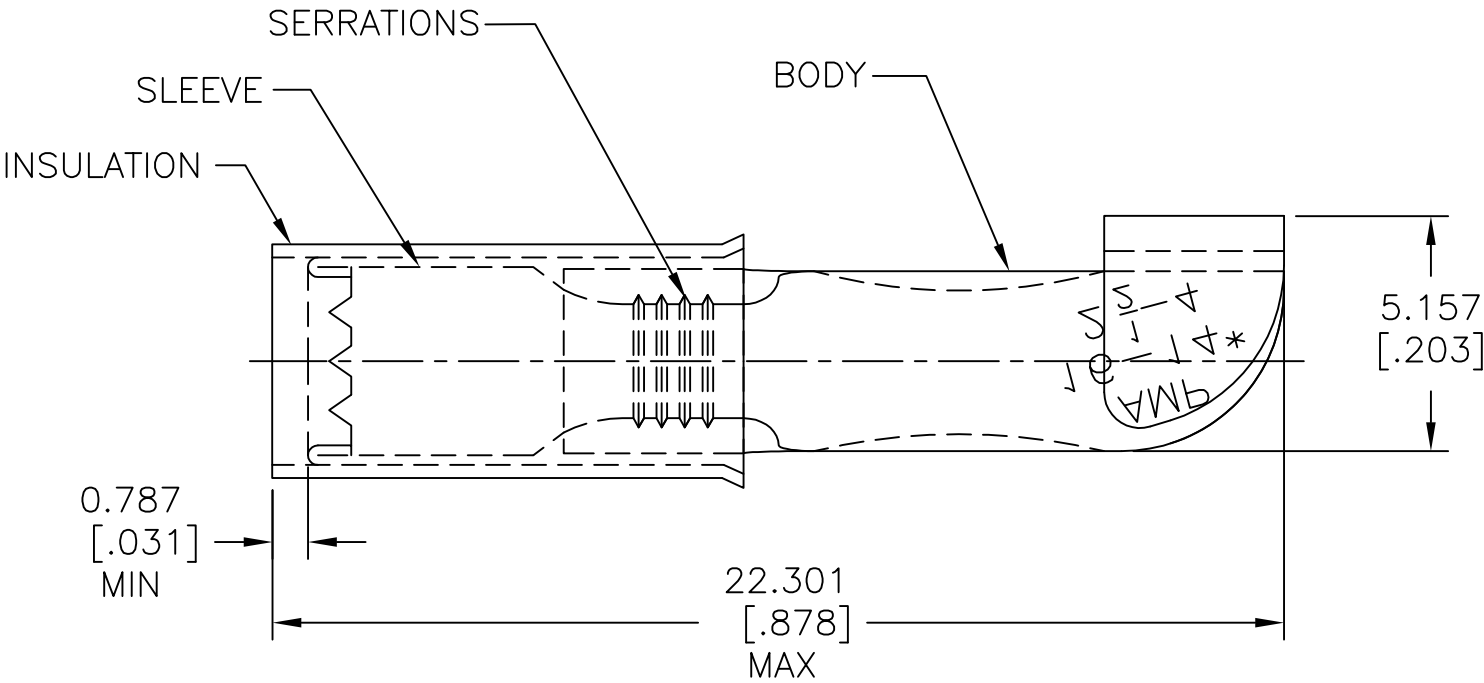

- 1 NOTE DELETED.
- 2 FOR 2.667[.105] TO 3.810[.150] WIRE INSULATION DIA.

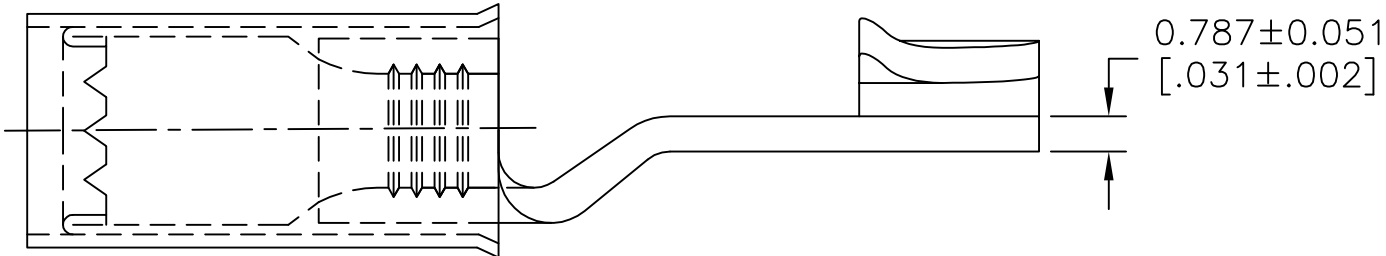

1000	LOOSE PIECE	INSULATION: PVC, COLOR BLUE SLEEVE: COPPER PER ASTM B152 BODY: COPPER PER ASTM B152 TIN PLATE PER ASTM B545	32447
QTY.	PACKAGE TYPE	MATERIAL	PART NO

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS			THIS DRAWING IS A CONTROLLED DOCUMENT.			TE Connectivity										
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221°F]	DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.127[.005] 4 PLC ± - ANGLES ± 5°	DWN jr_ruth 13MAR09	NAME TERMINAL, PIDG KNIFE DISONNECT, WIRE SIZE 16-14 AWG									
		VOLTAGE RATING: 300 V MAX				CHK TOM MICHIELUTTI 13MAR09										
	FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	WIRE CROSS SECTIONAL AREA RANGE, 1.04-2.62mm²[2,050-5,180] CIR MILS SOLID OR STRANDED							MATERIAL SEE TABLE	FINISH SEE TABLE	APVD TOM MICHIELUTTI 13MAR09	SIZE A3	CAGE CODE 00779	DRAWING NO C=32447	RESTRICTED TO -
												PRODUCT SPEC -				
FOR ORDER ENTRY	1-800-526-5142					CUSTOMER DRAWING			SCALE 8:1	SHEET 1 OF 1	REV D2					

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[32447](#)