
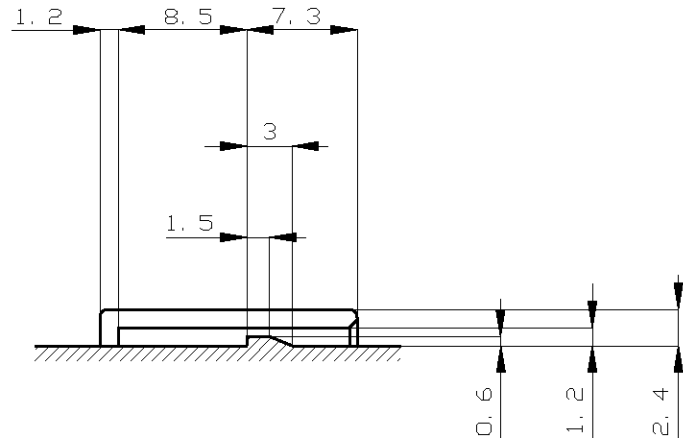
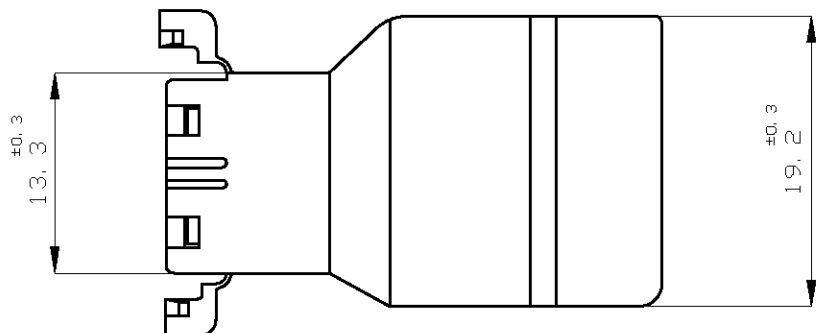
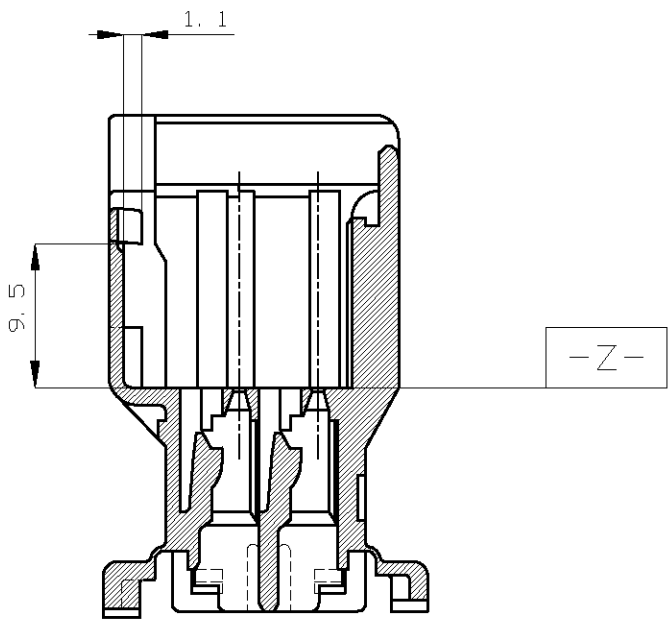
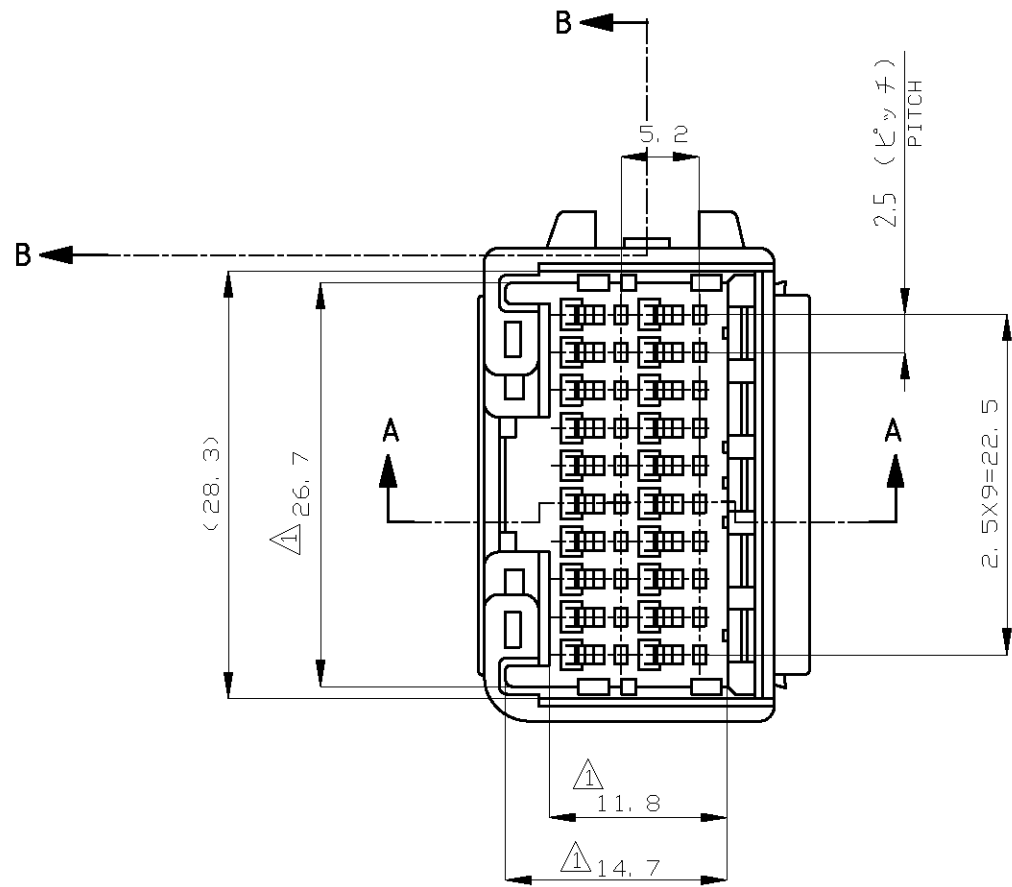
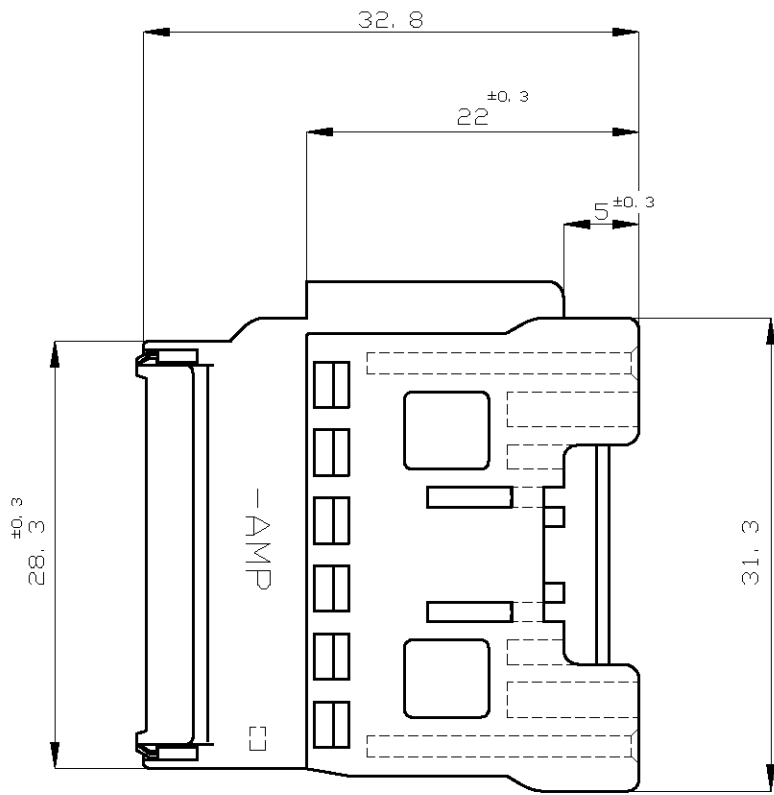


LOC	DIST	REVISONS				
		P	LTR	DESCRIPTION	DATE	APVD
J	-		D3	REVISED	ECR-13-002015	TS KB

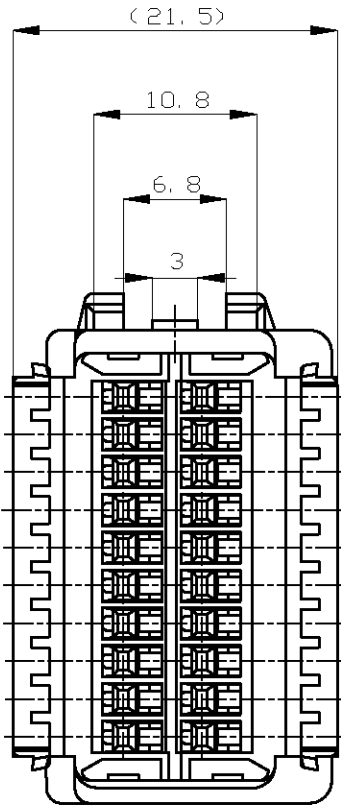

1. TO BE MEASURED WITHIN 2mm FROM -Z-
2. APPLICABLE TERMINAL NO. 173682
3. THE MATING PLUG HOUSING NUMBERS: 174047
1. -Z- 面から2mmの範囲で測定
2. 適用端子型番: 173682
3. 嵌合相手ハウジング型番: 174047

A-A

B-B

二重ロック時
DOUBLE LOCKED

TOLERANCE UNLESS OTHERWISE SPECIFIED: 一般公差	
0 < x ≤ 10	: ±0.2
10 < x ≤ 30	: ±0.25
30 < x ≤ 100	: ±0.3
ANGLE	: ±3°
角度	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.SUGAWARA	04AUG06	TE TE Connectivity	
DIMENSIONS: 単位: 桁 mm		CHK K.BETSUI	04AUG06		
		APVD K.BETSUI	04AUG06	NAME 名称 20POSITION CAP HOUSING 040SERIES MULTI-LOCK CONNECTOR	
		PRODUCT SPEC 製品規格 108-5352			
MATERIAL 材料 PBT		FINISH 仕上 -		SIZE A2	CAGE CODE 00779
		WEIGHT -		DRAWING NO 番号 C=175652	RESTRICTED TO -
		CUSTOMER DRAWING		SCALE 尺度 2:1	SHEET 1 OF 1
				REV D3	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[175652-2](#)