

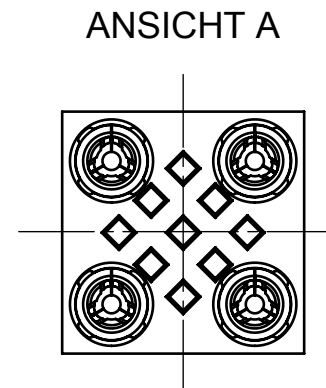
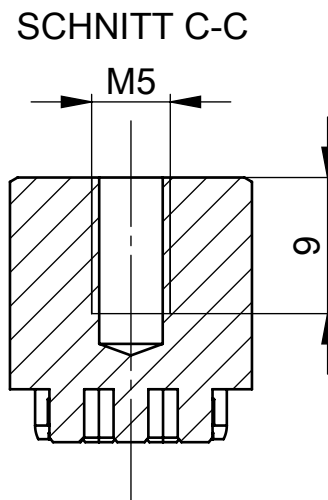
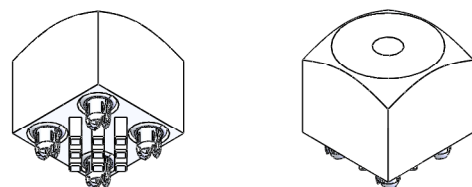


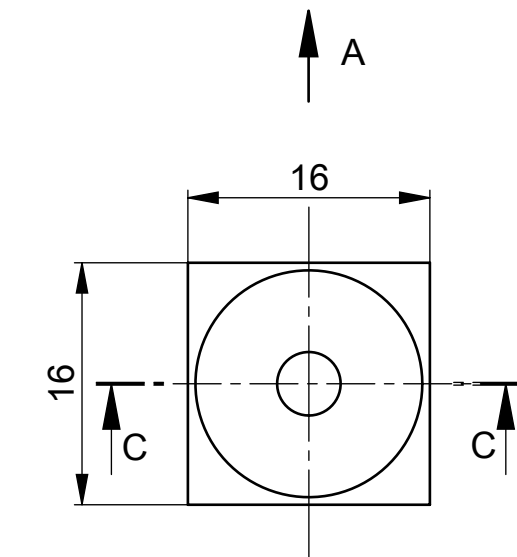

Layoutvorgabe (Ansicht PCB)

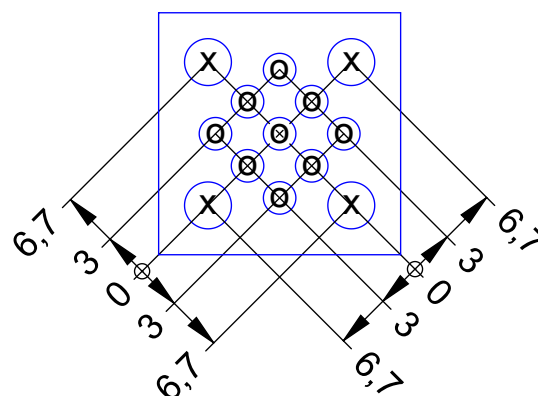

Lochspezifikation:

C

Bohrdurchmesser: $\varnothing 2,30^{+0,00}_{-0,03}$


Enddurchmesser chem. Zinn: $\phi 2,175^{+0,05}_{-0,05}$
(Cu: min. 30µm - max. 60µm)

Enddurchmesser HAL bleifrei: $\phi 2,15^{+0,05}_{-0,05}$
(Cu: min. 25 μ m, Sn: max. 15 μ m)

X

Bohrdurchmesser: $\varnothing 3,20^{+0,00}_{-0,03}$

Enddurchmesser: $\varnothing 3,10^{+0,04}_{-0,06}$

Material / Surface				Tolerances		 All Dimensions in mm		Scale 2:1		Original drawing			
								Drawing Number 225414					
						Date		Name		Designation ERNI BCS Powerelement Buchse M5			
				Drawn		15.03.12		M.Tolj					
				Checked		15.03.12		T.Engel					
				Approved									
						Electronics GmbH BLUEcontact Solutions				Customer Part Number		A4	
						D-73099 ADELBERG							
A	Neuerstellung	15.03.12	M.Tolj										
Index	Modification Nr.	Date	Name										

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[225414](#)