
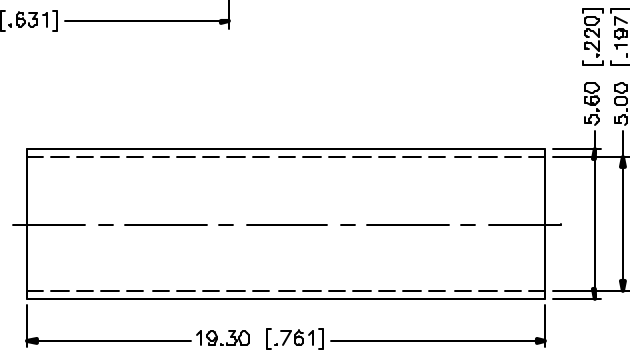
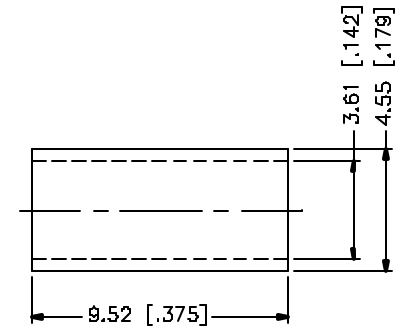

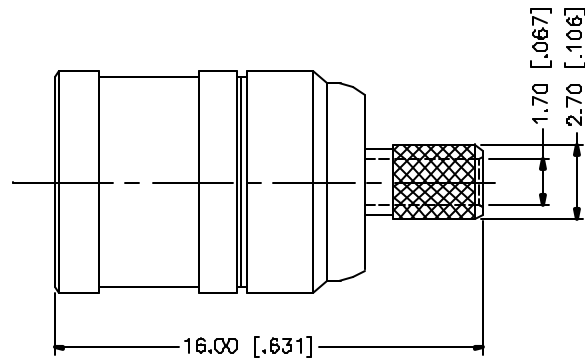


REV.	DATE	DESCRIPTION
D	05/01/04	REFORMAT DRAWING

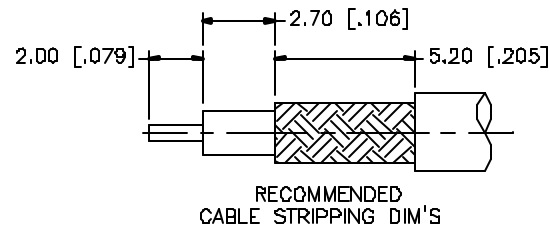

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .151"
2. CONTACT PIN TO SOLDER

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN () ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex				
8						DRAWN	G.R.S.	05/01/04						
7						CHECKED				PART DESCRIPTION SMB CRIMP PLUG (FOR RG-316/U DOUBLE BRAID CABLE)				
6						ISSUED								
5						SHEET	1 OF 1				PART NO. 142183			
4	FERRULE	BRASS	NICKEL	1										
3	CONTACT PIN	PHOS. BRONZE	GOLD	1					DWG. NO. 142183.DWG					
2	INSULATOR	TEFLON	NATURAL	1										
1	HOUSING/BODY	BRASS	NICKEL	1					REV. D		SIZE A		SCALE NA	
	DESCRIPTION	MATERIAL	FINISH	QTY	C:/142/142183.DWG									

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[142183](#)