


LOC	DIST	REVISIONS					
DF	S0	P	LTR	DESCRIPTION	DATE	DWN	APVD
			P	REV PER ECO-05-002357	08-05	AA	DE

1. .450 MAX DIMENSION HELD OVER THE .930 MAX AREA ONLY.
2. MARKED PER MIL-STD-130.
3. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS. METRIC EQUIVALENTS ARE BASED UPON 1.00 INCH = 25.4 mm.
4. LEADS WILL MATE WITH AMP LGH-4 RECEPTACLES.
5. TOLERANCE OF LEAD LENGTH:
UP TO 24 INCHES [609.6] = $\pm .12$ [± 3.0]
24 INCHES [609.6] & UP = 1%
6. OPERATING VOLTAGE: 50 KVDC AT 0 TO 70,000 FEET,
-55°C TO 125°C.
7. WHERE APPLICABLE "B" LENGTH IS SOLDER DIPPED.
8. INSULATION CUT, BUT NOT REMOVED.

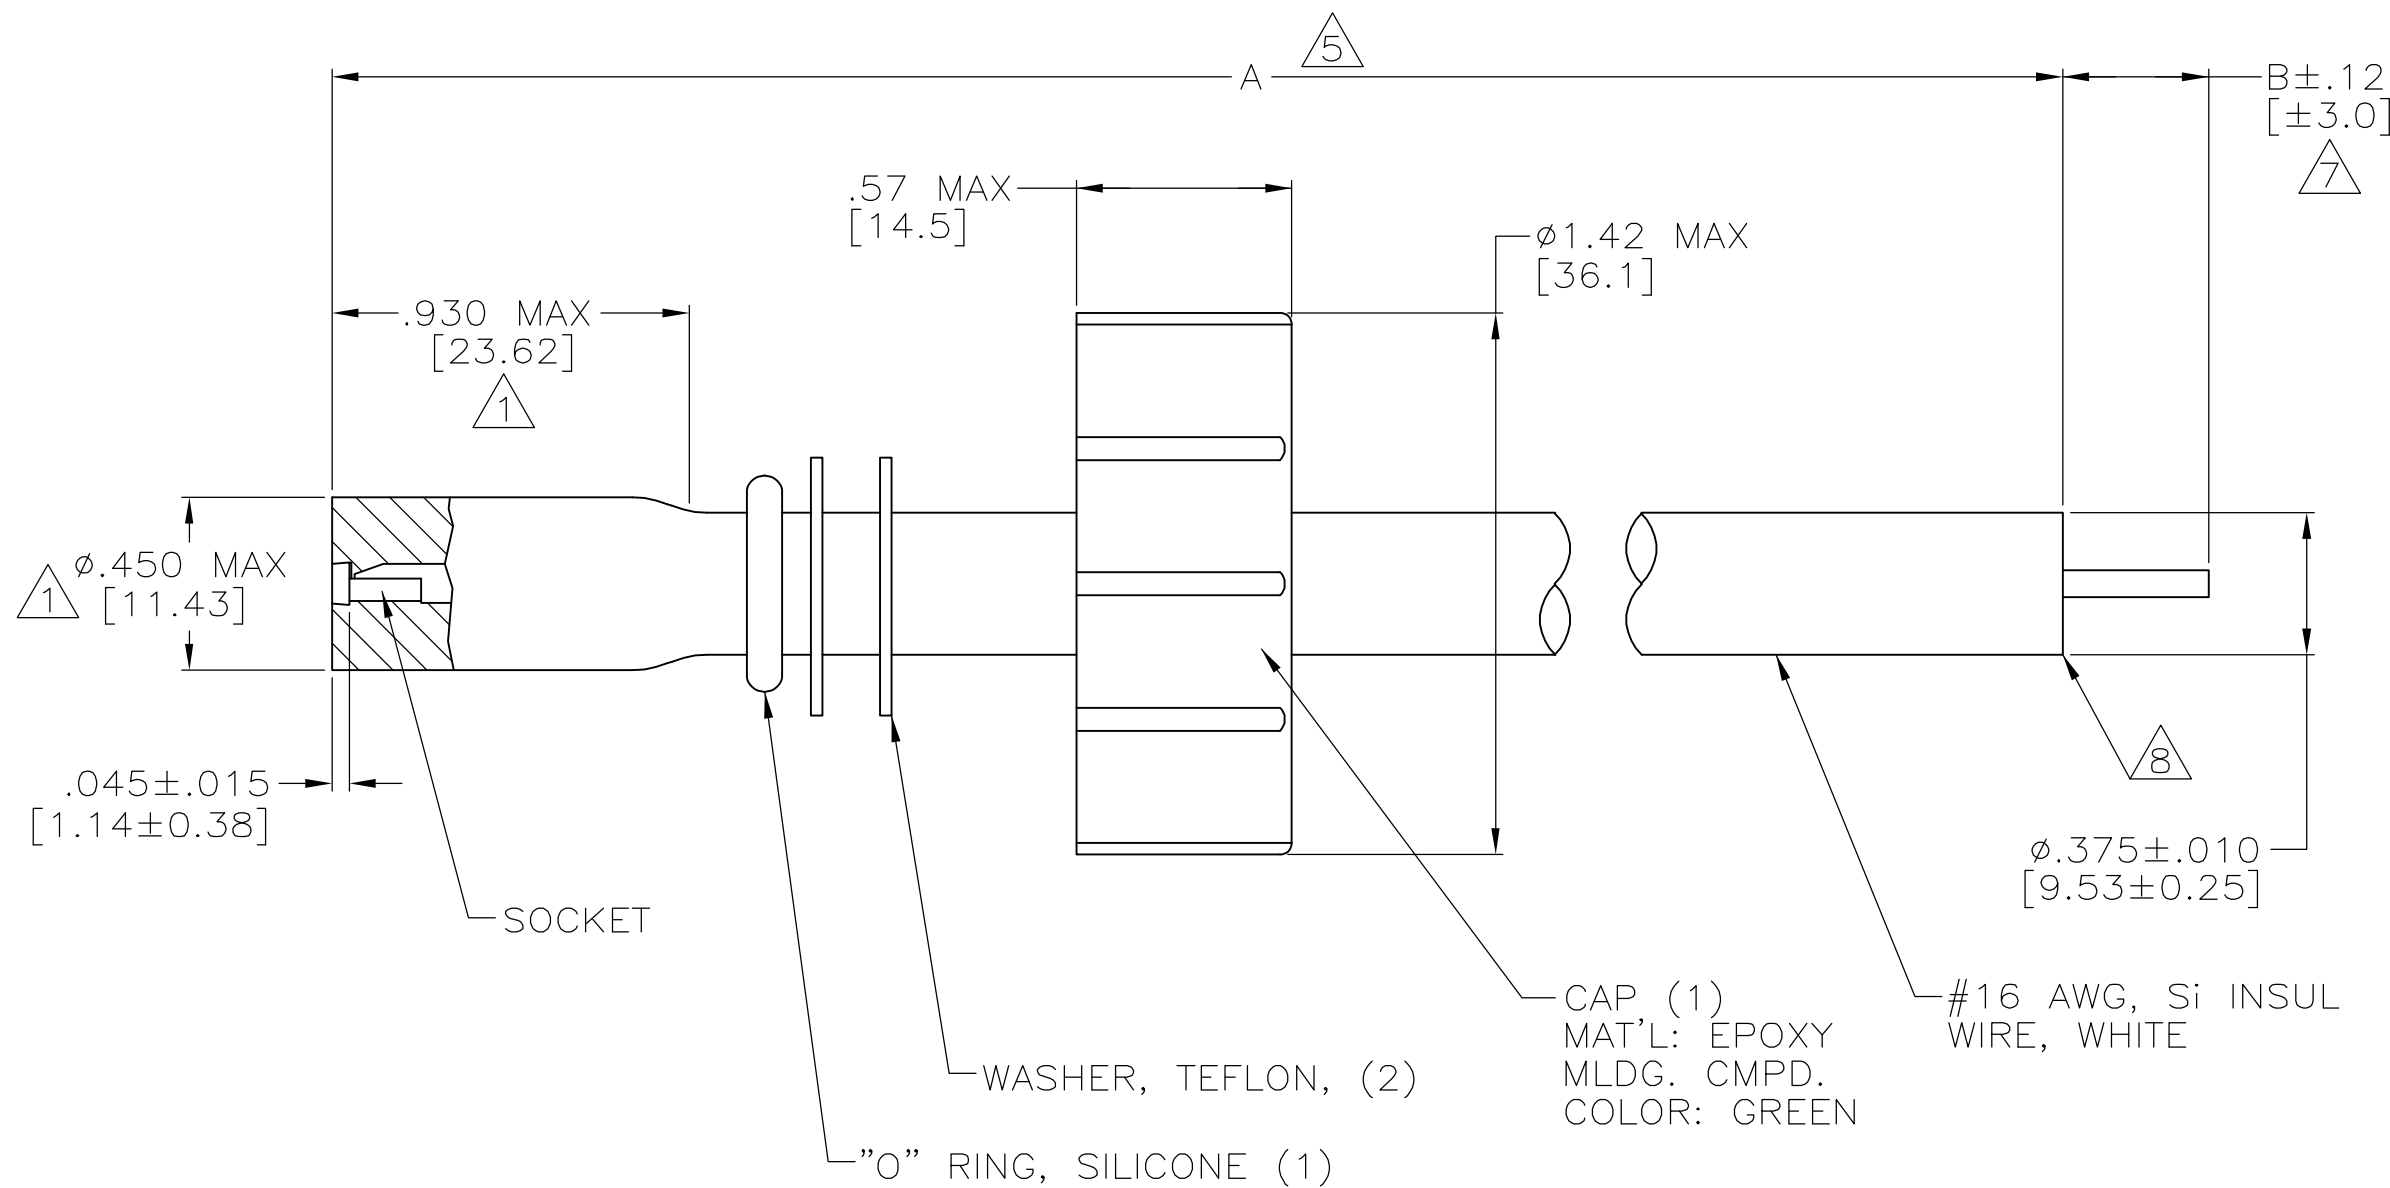

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.C.THOMAS 26-SEP-89 CHK D.EABY 26-SEP-89 APVD D.EABY 26-SEP-89		 Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: INCHES [mm]		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		NAME LEAD ASSY SGL END LGH-4	
		PRODUCT SPEC - APPLICATION SPEC -		SIZE A2	
MATERIAL SEE CALLOUTS		FINISH - WEIGHT -		CAGE CODE 00779	
		CUSTOMER DRAWING		DRAWING NO C-836566	
				RESTRICTED TO -	
				SCALE 2:1	
				SHEET 1 of 1	
				REV P	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-836566-7](#)