

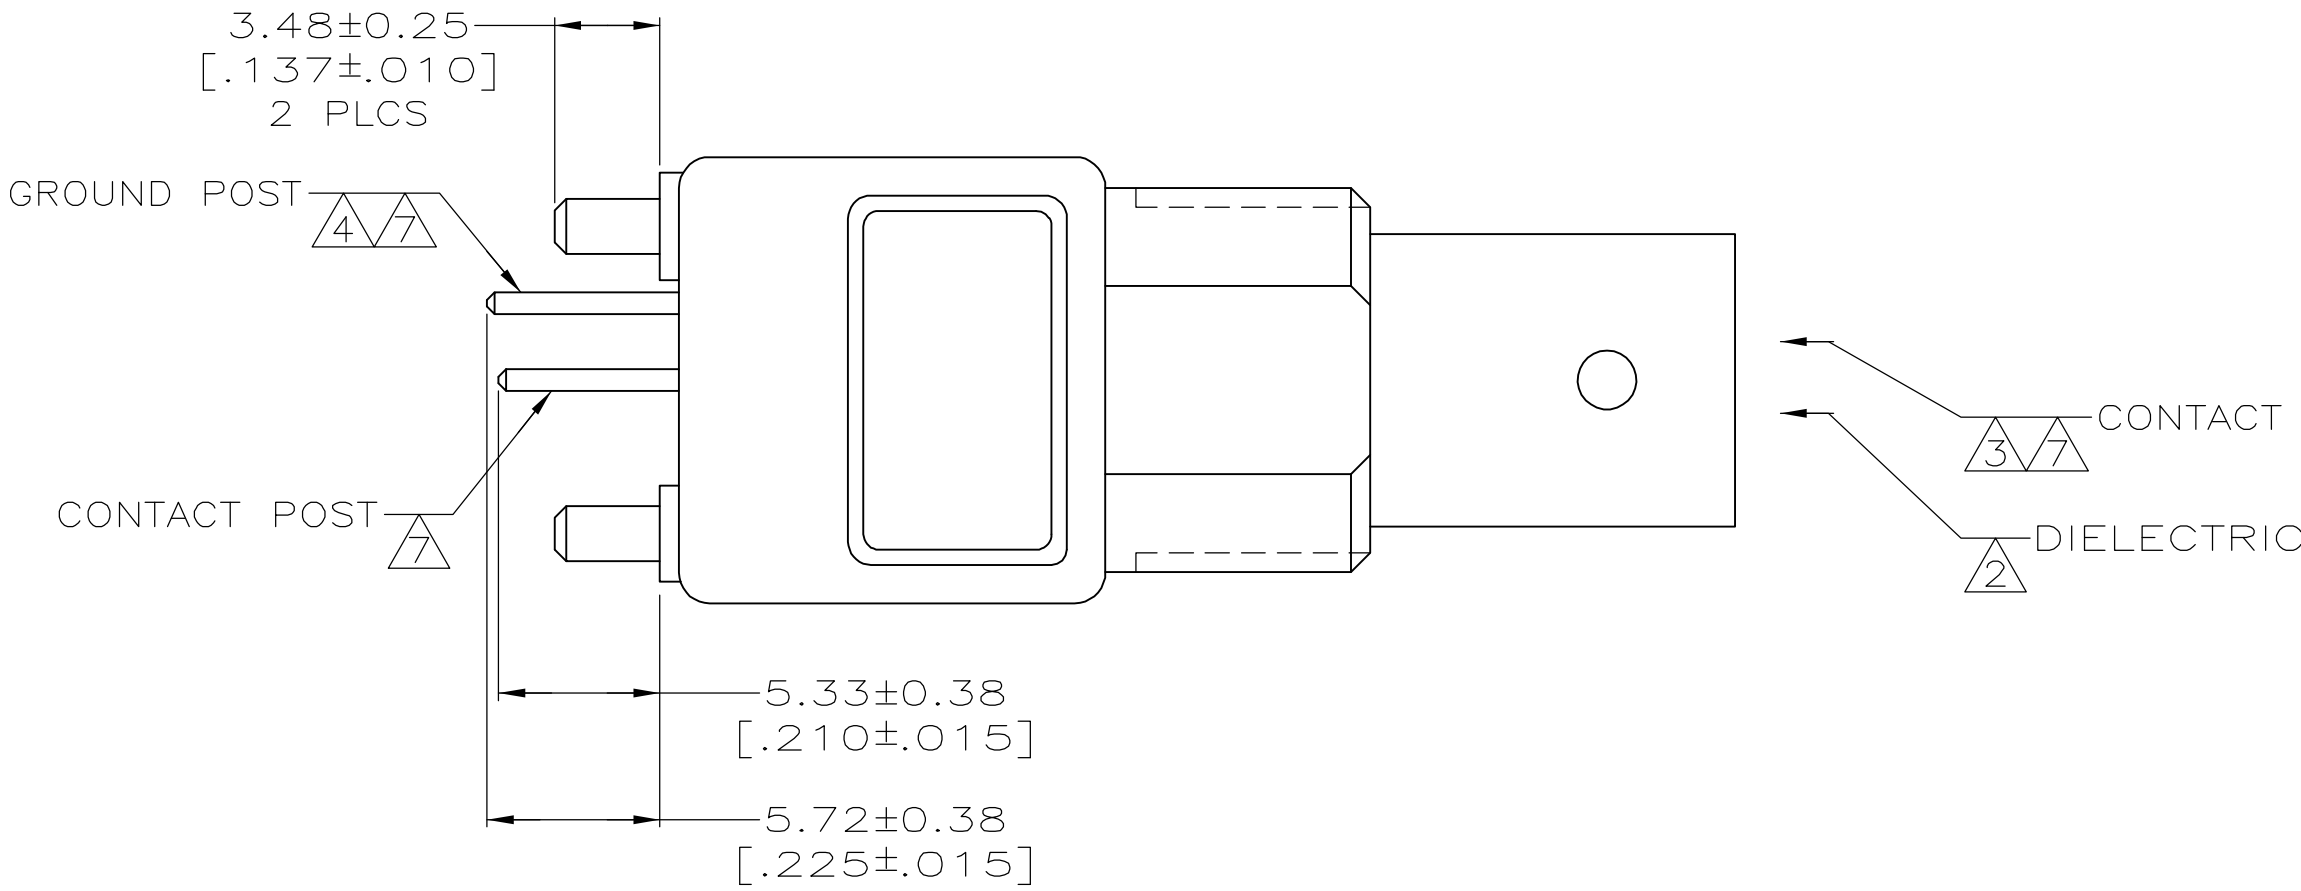
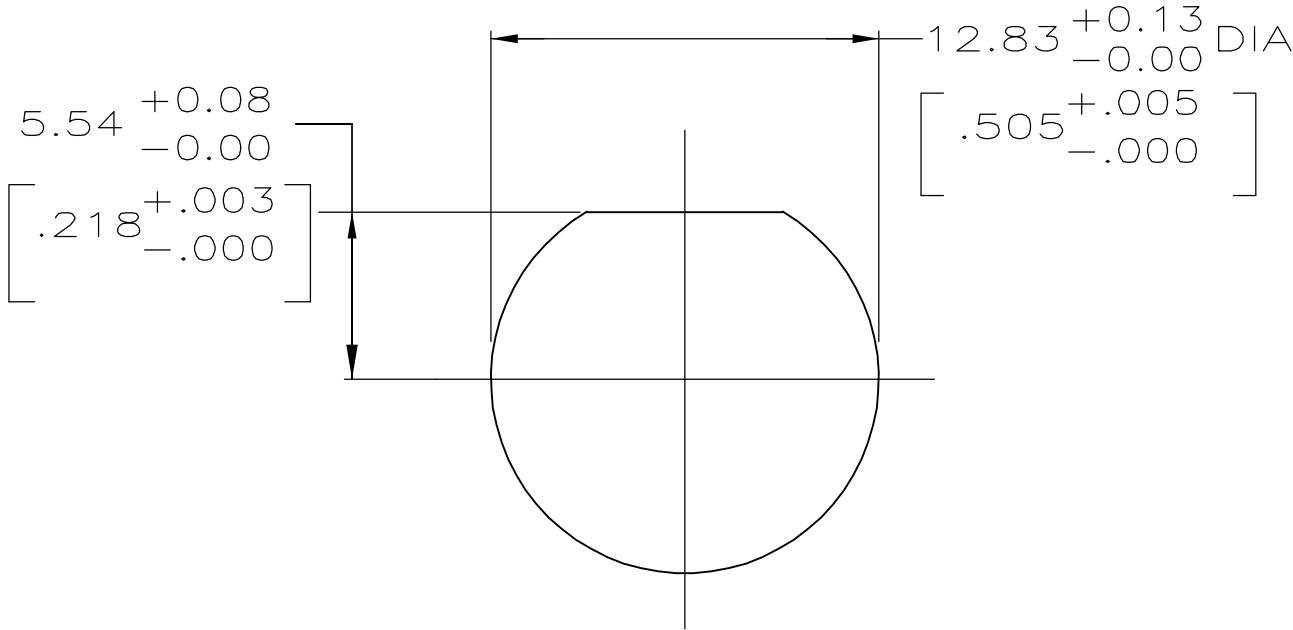



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AJ	16		C	PER EC 0514-0184-04	06JAN04	BM	JL

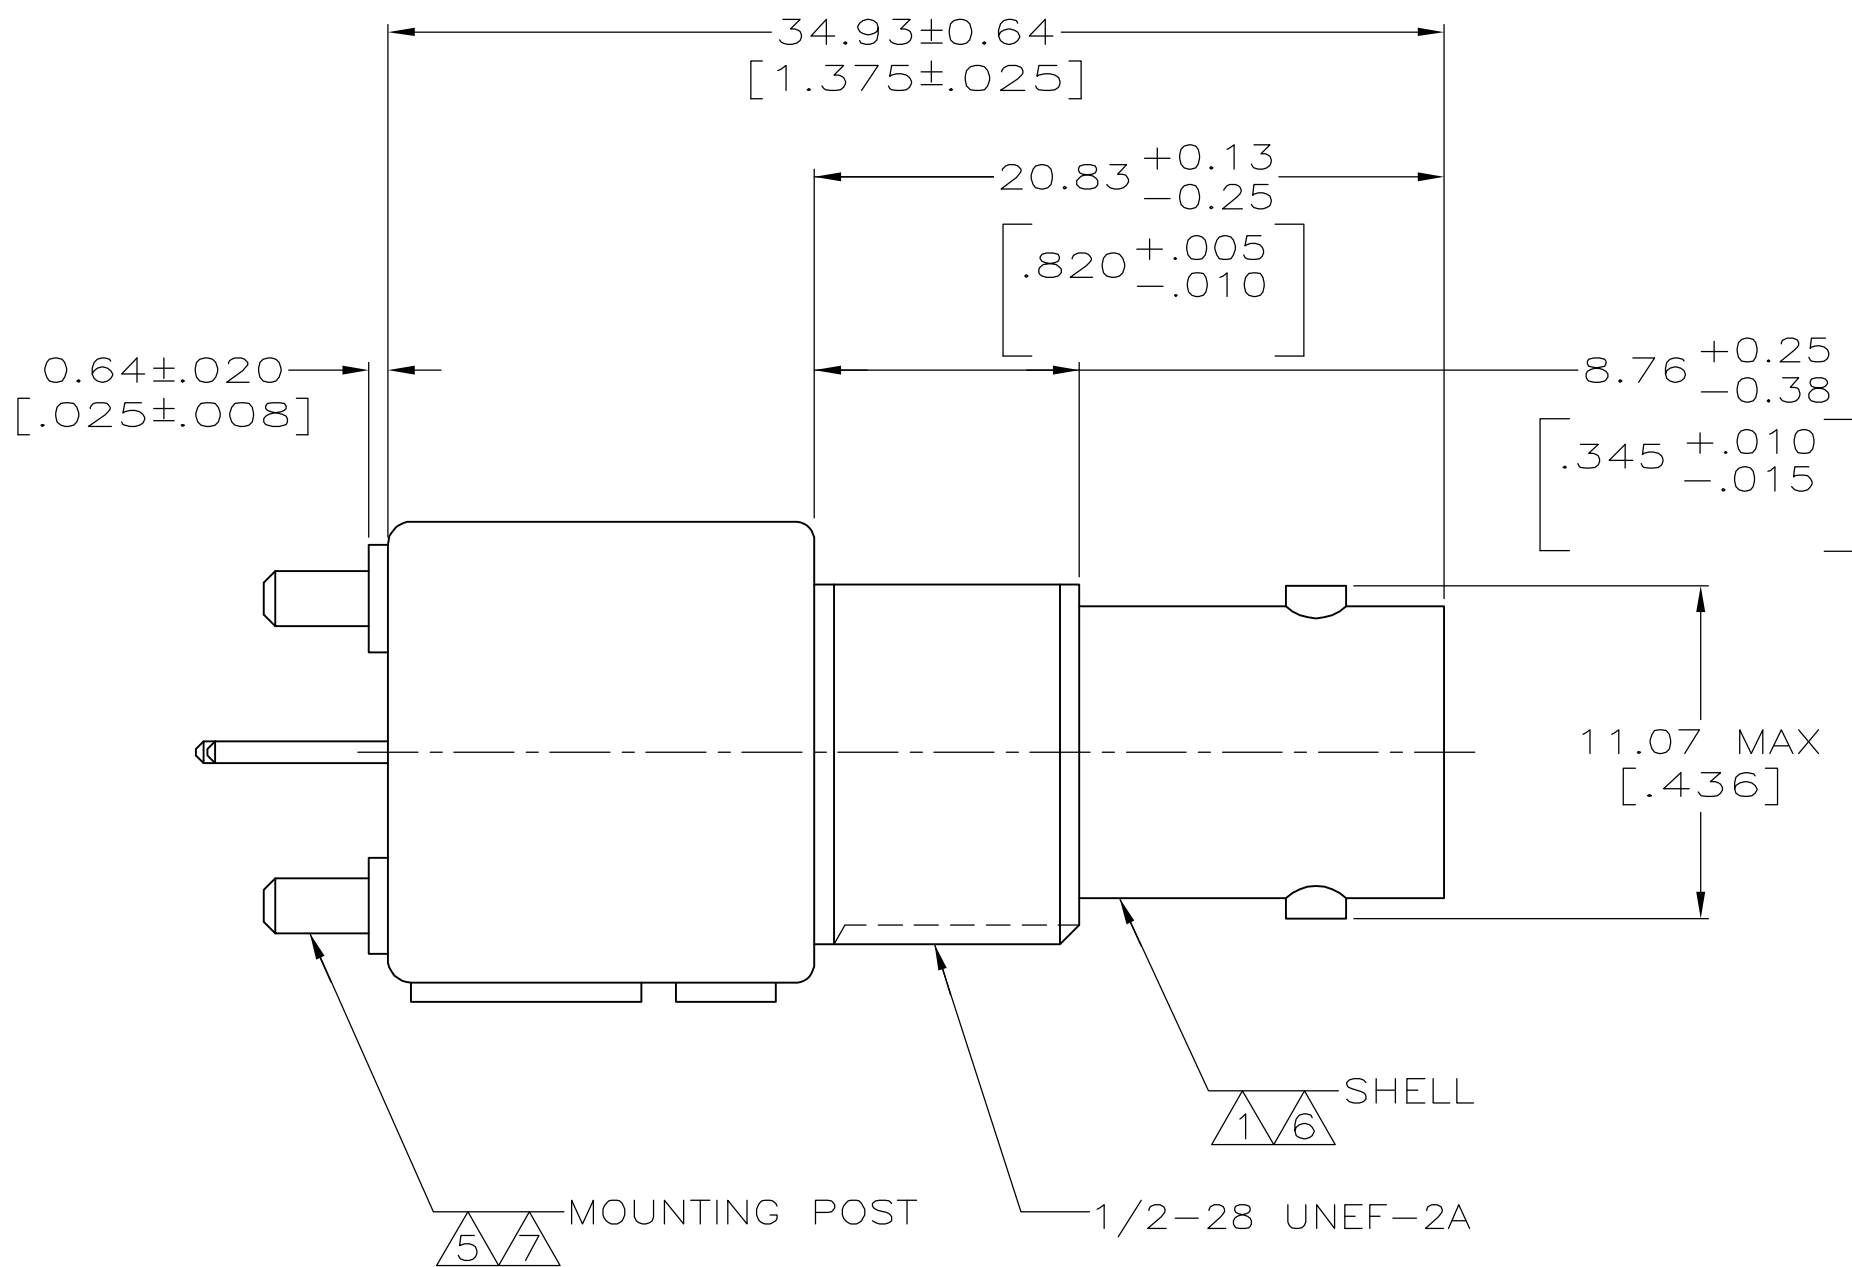

- 1 ZINC PER QQ-Z-363.
- 2 POLYMETHYLPENTENE PER ASTM-D-1238.
- 3 PHOSPHOR BRONZE PER QQ-B-750.
- 4 BRASS PER ASTM-B-453.
- 5 BRASS PER ASTM-B-16.
- 6 NICKEL PLATE PER QQ-N-290, 3.81 μm [.000150] MINIMUM THICK.
- 7 TIN PLATE PER ASTM-B-545, 3.81 μm [.000150] MINIMUM THICK.
- 8. SEE INSTRUCTION SHEET 2769.

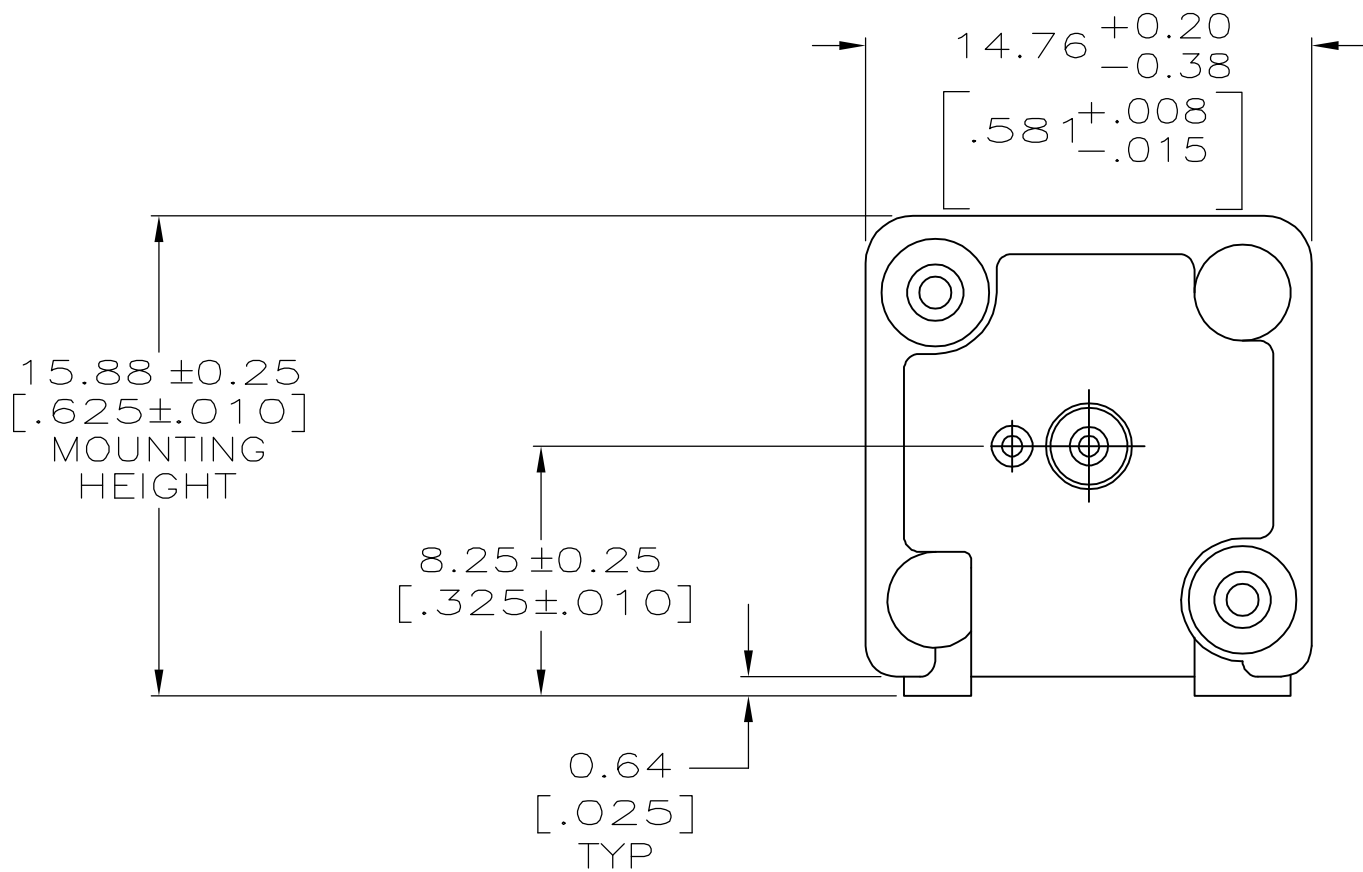

RECOMMENDED PANEL CUTOUT

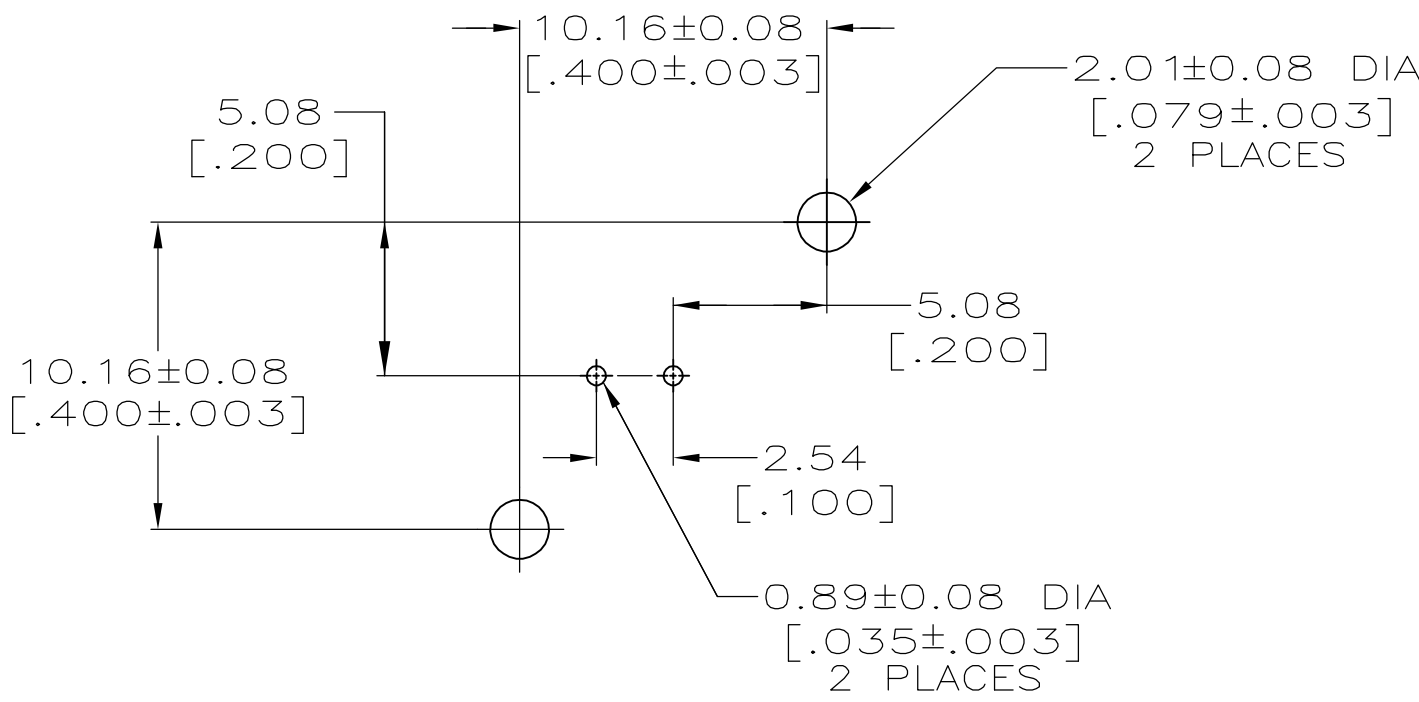

PCB CONFIGURATION

227671-1
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. LIPPERT 6-30-92	Tyco Electronics Corporation Harriaburg, PA 17105-3608	
DIMENSIONS: INCHES		CHK A. GABANY 7-2-92	NAME JACK, VERTICAL, PCB, 50 OHM, SERIES BNC	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.05 [.002] 3 PLC ± - 4 PLC ± - ANGLES ± -		APVD A. GABANY 7-2-92	PRODUCT SPEC 108-12078	
			APPLICATION SPEC	
			SIZE A1	
MATERIAL SEE NOTES 1-5		FINISH SEE NOTES 6-8		RESTRICTED TO -
CUSTOMER DRAWING		SCALE 4:1		SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[227671-1](#)