
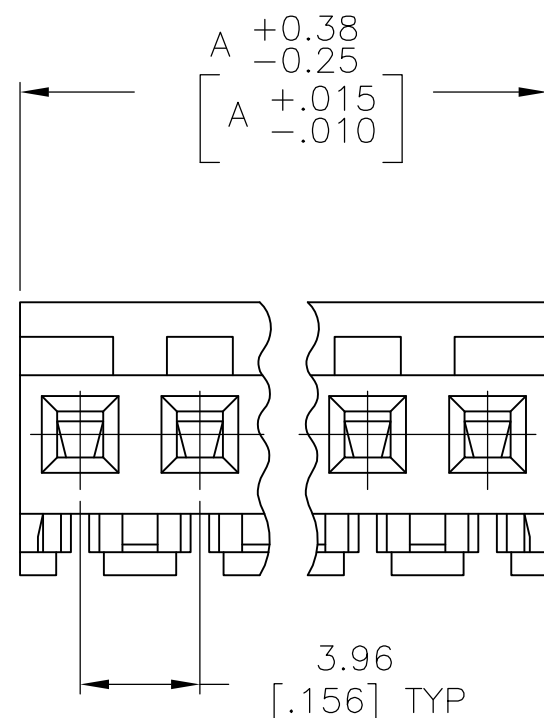


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	C1	REVISED PER ECR-15-006702	28JUL2015	NK	PQ

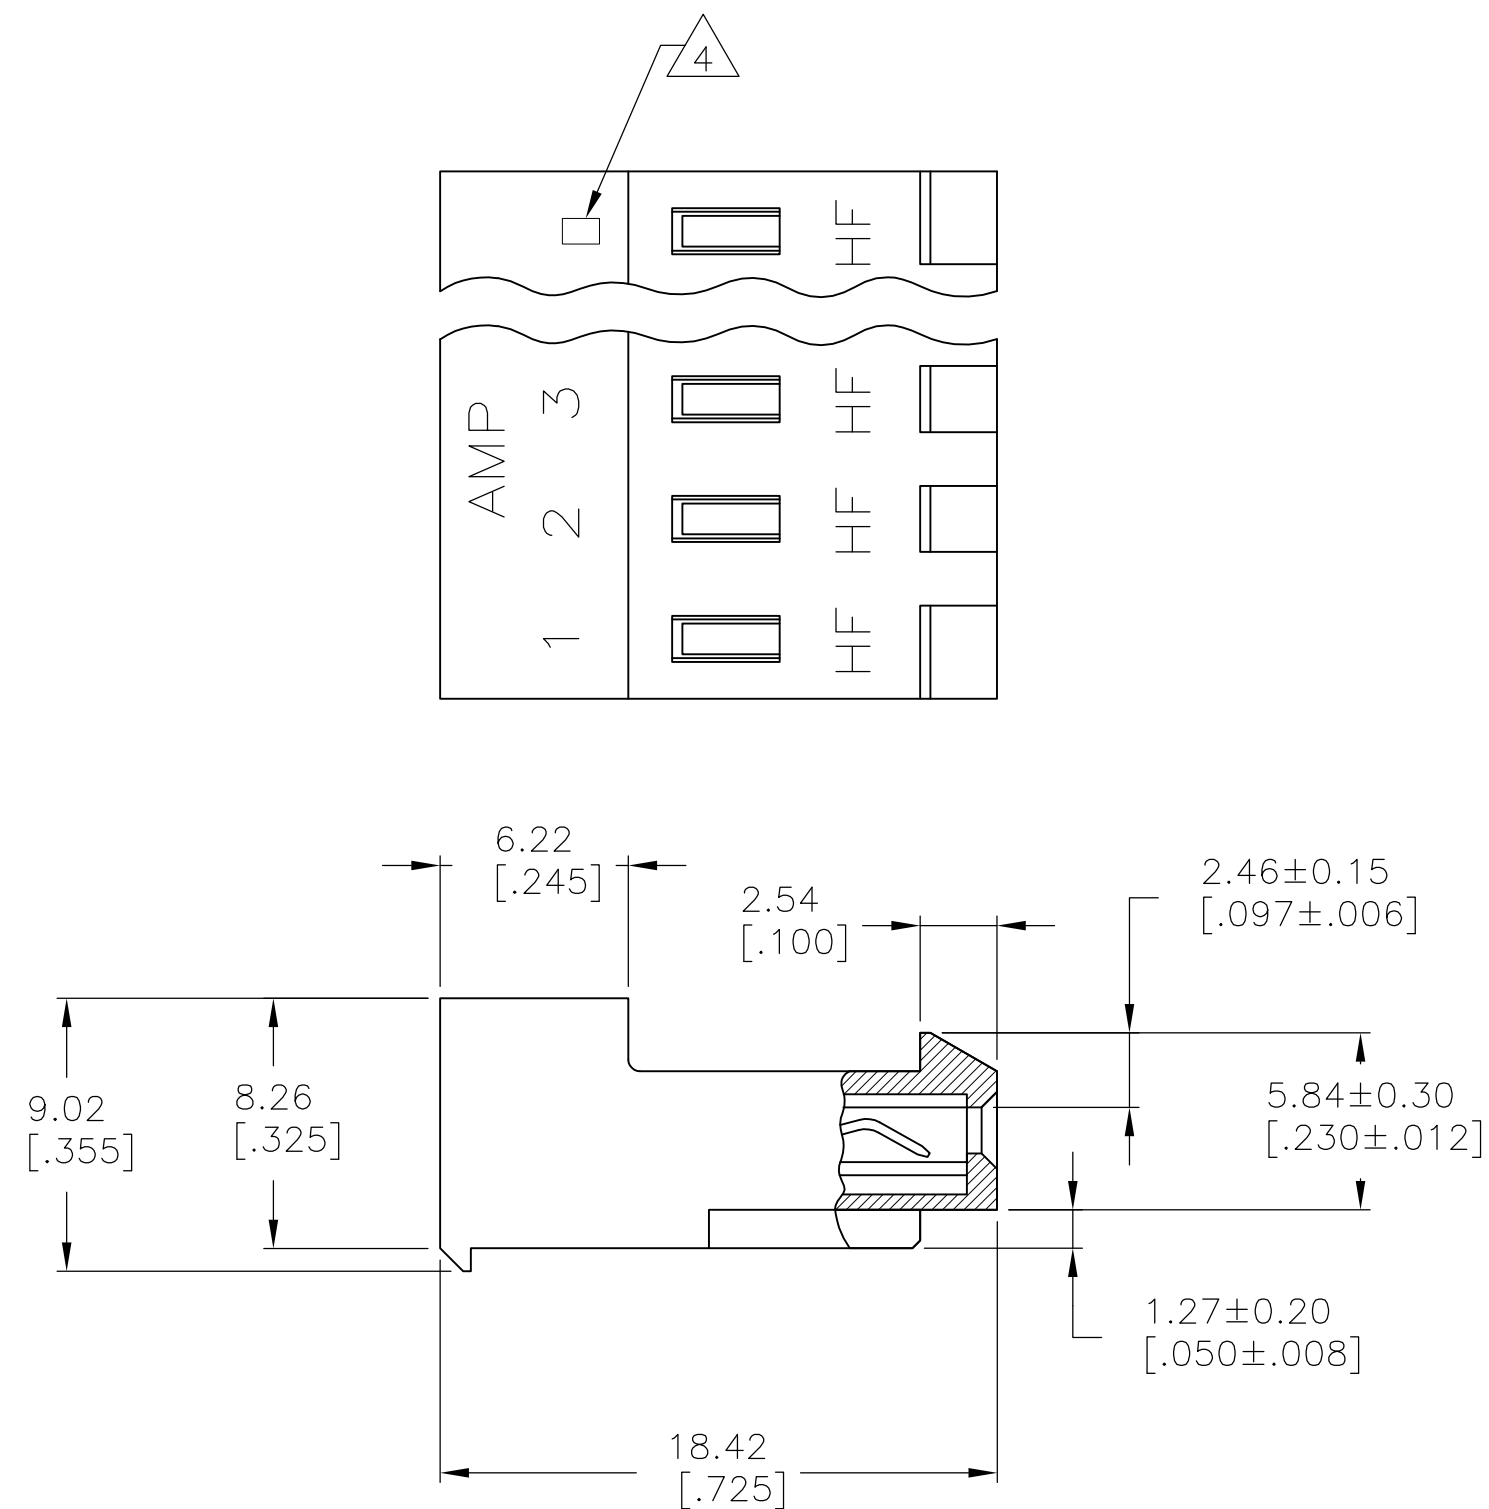

1. MATERIAL: CONNECTOR — NYLON UL94V-2 (RED).
CONTACTS — 0.30[.012] THICK COPPER ALLOY BRIGHT TIN-LEAD
0.00203[.000080] MIN THICK FOR -2 THRU -28
— 0.30[.012] THICK COPPER ALLOY MATTE WHISKER
MITIGATED TIN 0.00203[.000080] MIN THICKNESS
OVER NICKEL UNDERPLATE FOR -32 THRU -58.

2. CONTACTS ACCEPT 22 AWG WIRE WITH 2.41[.095] MAX
INSULATION DIAMETER.

3. CONTACTS MUST ACCEPT 1.14 ± 0.03 [.045 $\pm$.001] SQUARE
POST AND REMAIN LOCKED IN POSITION.

4. IDENTIFICATION NUMBER FOR LAST CIRCUIT MAY
NOT APPEAR ON ALL ASSEMBLIES.

5. DIMENSIONS IN BRACKETS ARE IN INCHES.

6. HOUSING FEATURES ARE: CLOSED END WITH LOCKING
RAMP.(HIGH FORCE CONTACT)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[643193-2](#)