

N° D'EMPREINTE DU PORTE-CLIPS
FEMALE HOUSING CAVITY NUMBER

Figure 10 illustrates the dimensioning of a hole and a shaft. The hole (H) has a nominal diameter of 40 mm and a tolerance of ± 0.05 mm. The shaft (h) has a nominal diameter of 40 mm and a tolerance of ± 0.05 mm. The tolerance boxes for both are shown, indicating the nominal size, the tolerance zone width (0.20 mm), and the tolerance type (H for hole, h for shaft).

[illegible]

Technical drawing of a lever assembly (Figure 1). The drawing shows a side view of the lever with various dimensions and material specifications.

Dimensions:


- Overall width: 26.75 ± 0.10
- Overall height: 35.00
- Distance between mounting points: $4 \times 2.60 \pm 0.10$

Material Specifications:

- MATIERE DU LEVIER / LEVER RAW MATERIAL
- LOGO DELPHI OU MVL DU LEVIER / DELPHI OR MVL LOGO OF LEVER

Other Labels:

- PA 66 GF30
- 10

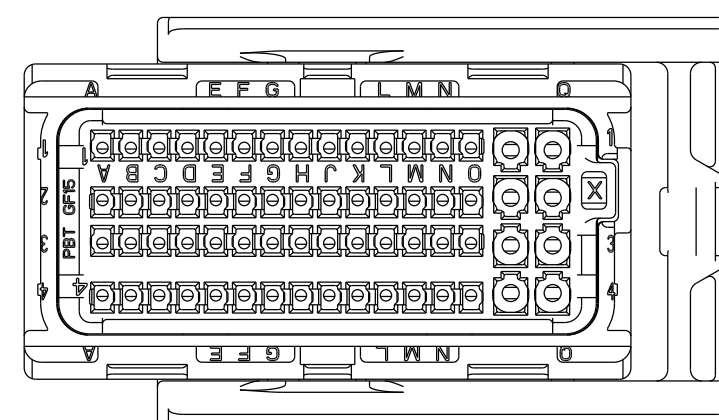

INDICE DU PORTE-CLIPS ASSE
FEMALE CONNECTOR REVISION

INDICATION SORTIE FAISEAU (DROIT)
WIRING OUT INDICATION (RIGHT)

36.00 ± 0.30

38.20 ± 0.25

GRILLE PRE-VERROUILLEE
(POSITION DE LIVRAISON)
GRID PRE-LOCKED (DELIVERY POSITION)

A

MATER (MOIS/ANNEE)

CLOCK DATE INDICATOR (MONTH/YEAR)

PBT GF15

FFMAIF HOUSING RAW MATERIAL

MATERIE DU CORPS DU PORTE CLIPS

FE PA 06 013


NF R 13-462
FE PS 07 023

DOSSIER DE PRECONISATION : PU 087
USER'S MANUAL: PU 087

Ø DE FILS MINI ET MAXI ADMISSIBLE POUR GARANTIR L'ÉTANCHEITÉ DU PRODUIT SUITABLE MIN. AND MAX. WIRES Ø TO GUARANTEE THE WATER TIGHTNESS OF THE PRODUCT							
TYPE DE CONTACT TERMINAL SIZE	REFERENCE MVL MVL PART NUMBER	REFERENCE DELPHI DELPHI PART NUMBER	JOINT TUBE SUR FIL WIRE TUBE		Ø MINI MINIMUM Ø	Ø MAXI MAXIMUM Ø	
			REFERENCE MVL MVL PART NUMBER	REFERENCE DELPHI DELPHI PART NUMBER			
GTS1 0.635	0.35mm ²	PP10001619	13955989	-	-	1.30	1.50
	0.50mm ²	PP10000489	13648598	-	-	1.40	1.70
GTS2 1.5	0.50mm ² - 0.85mm ²	PP10001482	13712871	F418400	13779855	2.00	2.20
	1.00mm ² - 1.30mm ²	PP10001483	13741954	F418400	13779855	2.10	2.40
	1.40mm ² - 2.00mm ²	PP10001484	13749482	-	-	2.30	2.80




PRINCIPALES PROPRIÉTÉS MÉCANIQUES MAIN MECHANICAL PROPERTIES	CT 0635	CT 15
FORCE D'INSERTION D'UN CONTACT TERMINAL INSERTION FORCE	10N MAXI	12N MAXI
EFFORT DE POLARISATION D'UN CONTACT A 90° ET 180° TERMINAL POLARISATION FORCE AT 90° AND 180°	24 MINI	30 MINI
EFFORT DE RETENTION AVEC DV RETENTION FORCE WITH SECONDARY LOCK	80N MINI	100N MINI
EFFORT SUR LE LEVIER D'ACCOUPLEMENT PC/PL MATING FORCE ON THE SLIDER DEVICE	65N MAXI	
EFFORT SUR LE LEVIER DE DESACCOUPLEMENT PC/PL UNMATING FORCE ON THE SLIDER DEVICE	65N MAXI	
EFFICACITÉ DE VERROUILLAGE FULL ENGAGED EFFICIENCY	200N MINI	
CLASSE DE TEMPÉRATURE OPERATING TEMPERATURE	-40°C / +125°C	
CLASSE DE VIBRATIONS VIBRATION CLASS	15 g	
CLASSE D'ÉTANCHÉITÉ SEALING CLASS	±0.5 Bar IPX9K	(H)

	-	-
	-	-
	-	-
	-	-
	-	DELPHI P/N ADDED
	-	REVIEW OF TOLERANCES TO BE ACCORDANCE WITH OTHER CUSTOMER DRAWINGS

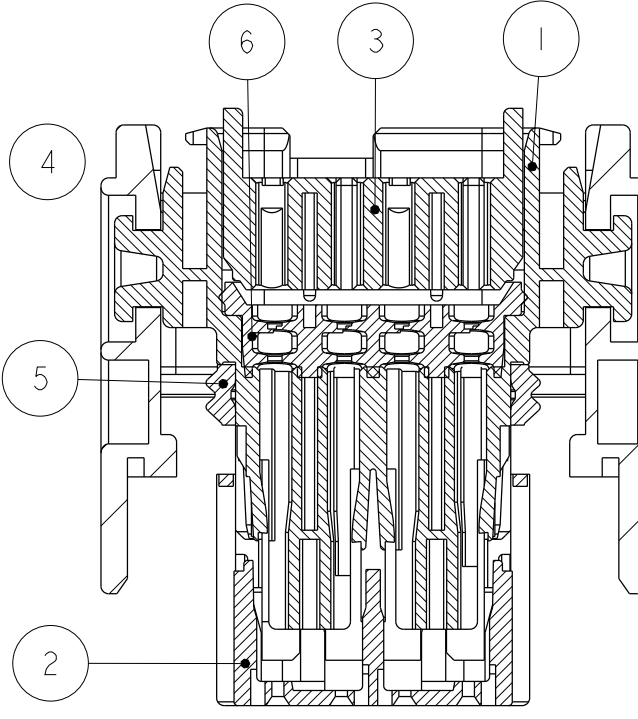[illegible]

CODAGE : EN ACCORD AVEC LA SPECIFICATION NF R 13-462
CODING : IN ACCORDANCE WITH NF R 13-462 SPECIFICATION

CODAGE MARRON
BROWN CODING

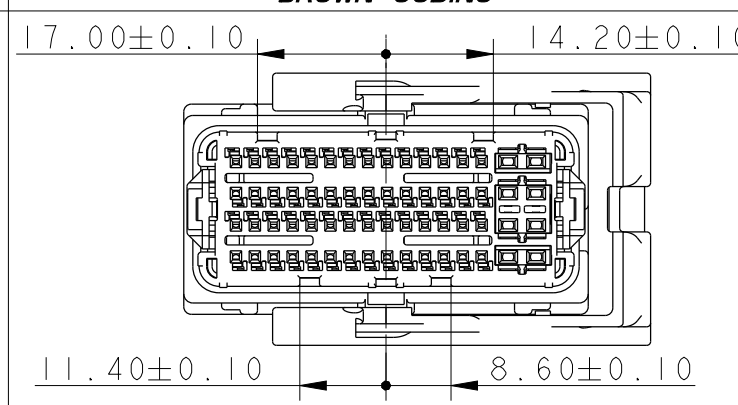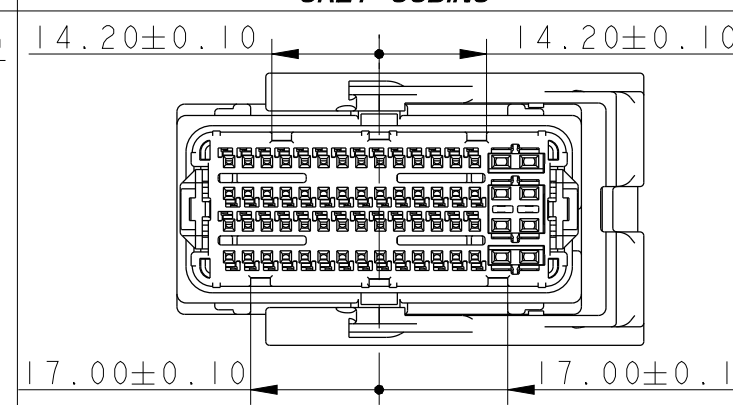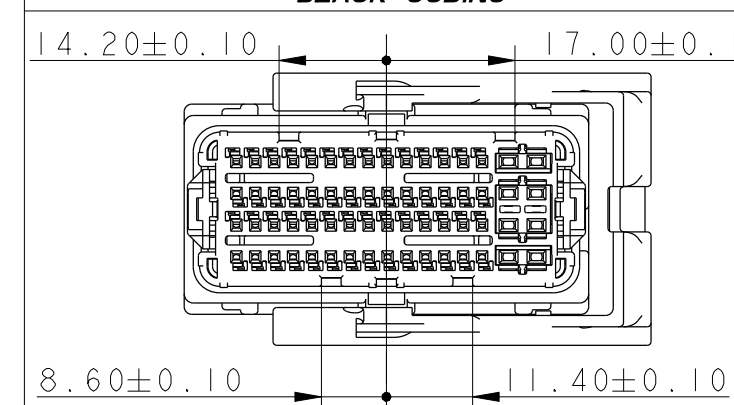

GAUCHE LEFT	DROITE RIGHT	GAUCHE LEFT	DROITE RIGHT	GAUCHE LEFT	DROITE RIGHT
13722628	13648596	33500503	33500504	33500505	33500506
01	01	01	01	01	01
PPI0001500	PPI0001501	PPI0001502	PPI0001503	PPI0001504	PPI0001505
C	C	C	C	C	C

	I	I	I
	I	I	I
	I	I	I
	I	I	I
	I	NA	NA
	NA	I	NA
	NA	NA	I
	I	I	I

[illegible]

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Aptiv:](#)

[PPI0001500](#) [PPI0001501](#) [PPI0001500-B](#)