
## UNCONTROLLED DOCUMENT

26.90 [1.059]

ANDDE -

0.50 [0.020] SQR, (2 PLS,) 1.50 [0.059]

- 2.54 [0.100]

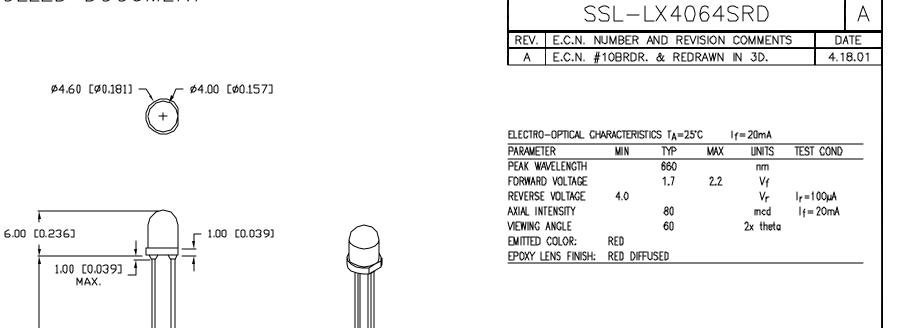

## LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	MAX	UNITS	
PEAK FORWARD CURRENT*	150	mA	
STEADY CURRENT	30	mA	
POWER DISSIPATION	100	mW	
DERATE FROM 25°C	- 1.2	m₩/ʰC	
OPERATING, STORAGE TEMP.	- 40 TO + 85	<b>'</b> C	
SOLDERING TEMP.	+ 260	<b>'</b> C	
2.0mm FROM BODY		3 SEC. MAX	
¥ t<10هرS			

PART NUMBER

REV.

UNCONTROLLED DOCUMENT *UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECINAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXX=±0.127 (±0.005), LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.020), MN= +0.000 MAX.= +0.000 MAX.= +0.000								
REV.	PART NUMBER	<u>confidential information</u> The information contained in this document is the property of	i me		E. HELEN ROAD ATINE. IL 60067-6	976 <b>A</b>		
А	SSL-LX4064SRD	LUMEX N.C. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUNEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSUME AND DISSEMINATION TO ALL THRO PARTIES.	-+	PHC US	)NE: +1.847.359.27 WEB: www.lumex.co WEB: www.lumex.co	90 m		
	T-4mm 660nm SUPER RED LED,	RELIABILITY NOTE OUR NAMY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT	DRAWN BY:		APPROVED BY: DAT	E: 4.7.99		
	RED DIFFUSED LENS.	SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. Please pay attention to your soldering process.	BC		PAG SCA			

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex: SSL-LX4064SRD