

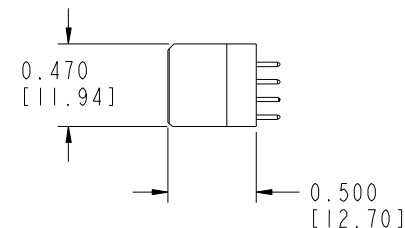


Tous droits strictement réservés. Reproduction ou communication à des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriété de c FCI. Droits de reproduction FCI.

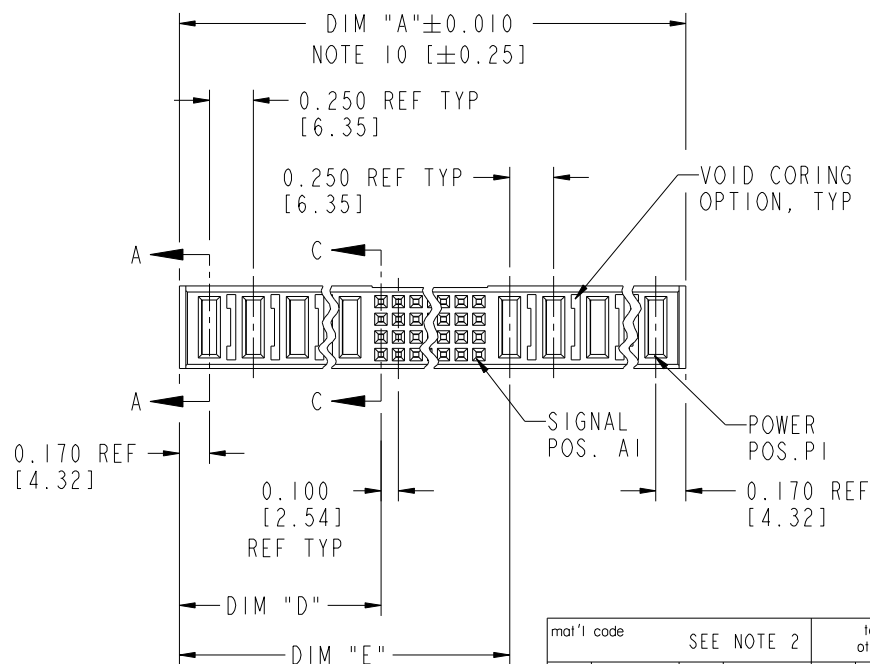

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

PRODUCT NUMBER
51744-ABBCCDDDE0--
Note: ①
SEE NOTE 1

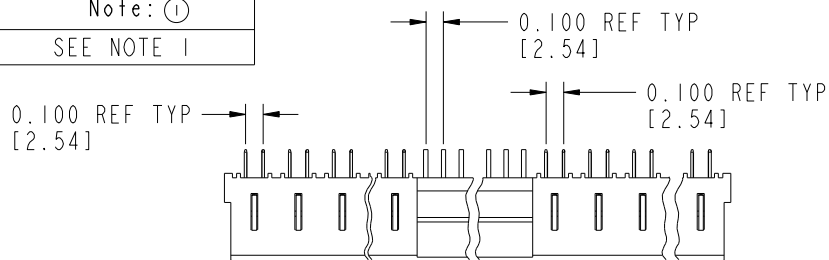

mat'l code				SEE NOTE 2		tolerances unless otherwise specified		CUSTOMER		FCI		www.fciconnect.com	
ltr	ecn no.	dr	date					COPY		projection		title	
H	DG05-0124	SJ	06/02/05	linear		.XX±.01/0.X±0.3						VERTICAL RECEPTACLE W/O GUIDE PIN	
J	DG08-0239	JC	09/11/08			.XXX±.005/0.XX±0.13						POWER / SIGNAL / POWER	
						.XXX±.0020/.XX±.051							
					angles	0°±2°							
					dr	D. EATON	05-25-99					product family	PWRBLADE
					enrg	J. BROWN	05-24-99					size	dwg no
					chr	J. BROWN	05-26-99					51744	213
					appd	J. BROWN	05-26-99					scale	sheet
												1:1	1 of 3
sheet index	revision sheet	J	J	J									
		1	2	3									

Pro/E

cage code 22526

Tous droits strictement réservés. Reproduction ou communication à des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire.
Propriété de c FCI. Droits de reproduction FCI.



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor.
Property of FCI. Copyright FCI.

PRODUCT NUMBER	DIM	LENGTH FORMULAS (SEE NOTE 10)
51744-ABBCCDDE0_	DIM "A"	.250 [6.35] x DD + .100 [2.54] x (CCC/4) + .250 [6.35] x BB + .090 [2.29]
Note: ①	DIM "D"	.250 [6.35] x DD + .095 [2.41]
SEE NOTE 1	DIM "E"	.250 [6.35] x DD + .100 [2.54] x (CCC/4) + .170 [4.32]
	DIM "F"	.250 [6.35] x DD + .100 [2.54] x (CCC/4) + .250 [6.35] x BB + .120 [3.05]
	DIM "G"	.250 [6.35] x DD - .025 [0.64]
	DIM "H"	.250 [6.35] x DD + .100 [2.54] x (CCC/4)

CONNECTOR NOTES

- PRODUCT NUMBER CODE:
51744 - A BB CCC DD E 0 LF
NO THIS SUFFIX: 100u"/2.54um SnPb ON PCB INTERFACE
ADD THIS SUFFIX: 78u"/2.00um Sn ON PCB INTERFACE
ALWAYS "0" (ZERO) (NOTE 8))
TAIL OPTIONS (NOTE 7)
NUMBER OF LEFT END POWER CONTACTS (NOTE 6)
NUMBER OF SIGNAL CONTACTS (NOTE 5)
NUMBER OF RIGHT POWER CONTACTS (NOTE 4)
PLATING (NOTE 3)
BASE NUMBER
- HOUSING MATERIAL: GLASS FILLED V-O HIGH TEMP THERMO PLASTIC.
SIGNAL CONTACT MATERIAL: COPPER ALLOY
POWER CONTACT MATERIAL: COPPER ALLOY
- PLATING OPTION:
1 = SEE PRINT 10064183 FOR PLATING SPEC OF 51744-IBBCCDDE0; 51744-IBBCCDDE0LF
- RIGHT END POWER CONTACT, 01 TO 19 AVAILABLE.
MAXIMUM OF 20 POWER CONTACTS PER CONNECTOR.
- SIGNAL CONTACTS, 004 TO 148 AVAILABLE.
- LEFT END POWER CONTACTS, 01 TO 19 AVAILABLE.
MAXIMUM OF 20 POWER CONTACTS PER CONNECTOR.
- TAIL OPTIONS:
A = .135±.010 [3.43±.25] SOLDER TO BOARD
C = .135±.010 [3.43±.25] PRESS FIT
- BOARD RETENTION NOT AVAILABLE WITH GUIDELESS ENDS.
- MANUFACTURE'S NAME, P/N, AND DATE CODE TO APPEAR ON THIS SURFACE.
- THE MAXIMUM OVERALL LENGTH (DIM A) OF A PART IS 8.00 [203.2].

11. PRODUCT SPECIFICATION GS-12-149.

12. REFERENCE 51698 FOR SPECIALS WORKSHEET.

PCB NOTES:

- ALL DIMENSIONS ARE BASIC UNLESS OTHERWISE SPECIFIED.
- ALL THROUGH HOLES ARE LOCATED WITH A TRUE POSITION OF .004 [0.01]
- ALL HOLE DIAMETERS ARE FINISHED HOLE SIZE.
- 0.0453±.001 [1.151±.02] DRILLED HOLES PLATED WITH 0.0003 [0.007] MIN SnPb OVER 0.001 [1.03] TO .003 [0.08] PLATING TO ACHIEVE A .040 ±.003 [1.02 ±.08] HOLE.
- A SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.

mat'l code				SEE NOTE 2		tolerances unless otherwise specified		CUSTOMER		FCI		www.fciconnect.com	
ltr	ecr no.	dr	date					COPY					
J				linear		.XX±.01/0.X±0.3		projection					
						.XXX±.005/0.XX±0.13							
				angles		.XXX±.0020/.XX±.051							
						0°±2°							
				dr		D. EATON 05-25-99		INCH/MM					
				enrg		J. BROWN 05-24-99							
				chr		J. BROWN 05-26-99		scale					
				appd		J. BROWN 05-26-99		1:1					
sheet index	revision sheet												




cage code 22526

Tous droits strictement réservés. Reproduction ou communication à des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriété de c FCI. Droits de reproduction FCI.



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

PRODUCT NUMBER
51744-ABBCCCDDE0--
Note: ①
SEE NOTE 1

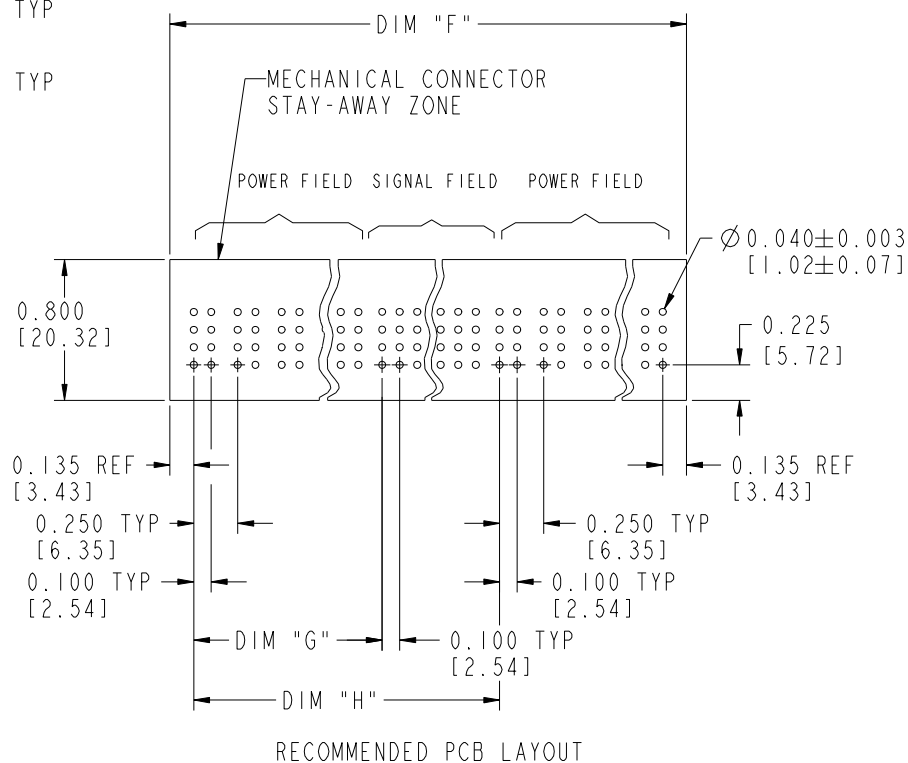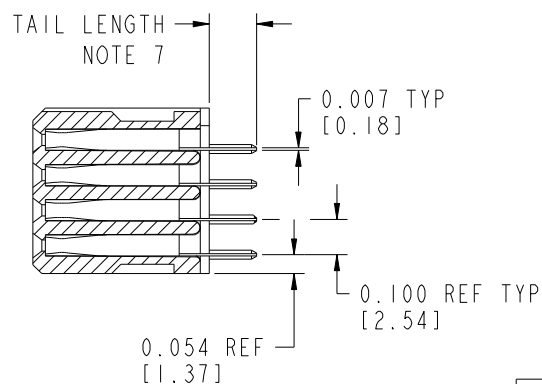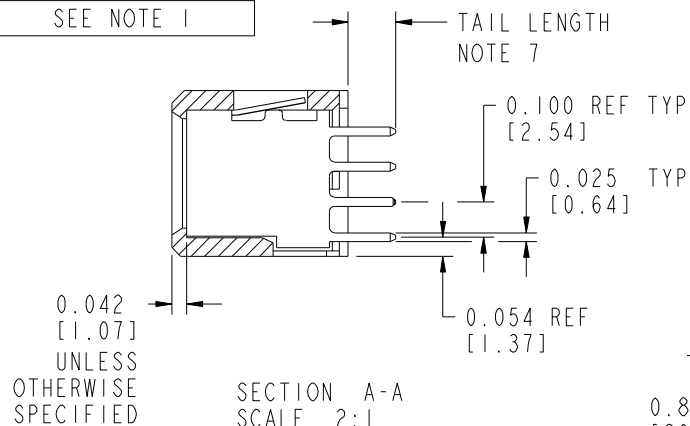

mat'l code				SEE NOTE 2		tolerances unless otherwise specified		CUSTOMER		FCI		www.fciconnect.com	
litr	ecn no.	dr	date			linear	.XX±.01/0.X±0.3	COPY		projection		title	
J							.XXX±.005/0.XX±0.13					VERTICAL RECEPTACLE W/O GUIDE PIN	
						angles	.XXX±.0020/.XX±.051					POWER / SIGNAL / POWER	
						dr	0°±2°					product family	
						enrg	D. EATON 05-25-99					PWRBLADE	
						chr	J. BROWN 05-24-99					code	
						appd	J. BROWN 05-26-99					213	
												sheet	
												3	
sheet index	revision sheet												

Pro/E

cage code 22526

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[51744-10202402A0](#) [51744-10202402A0LF](#) [51744-10203202A0LF](#) [51744-10601204A0LF](#) [51744-10302403C0LF](#)
[51744-10601204A0](#) [51744-10301611A0LF](#) [51744-10301608A0LF](#) [51744-10102401A0](#) [51744-10301203A0LF](#) [51744-](#)
[10301203C0LF](#) [51744-10302403C0](#) [51744-10401204C0](#) [51744-10402404C0](#) [51744-10401604C0LF](#) [51744-](#)
[10601606C0LF](#) [51744-10200402A0LF](#) [51744-10302006A0LF](#) [51744-10104001C0LF](#)