
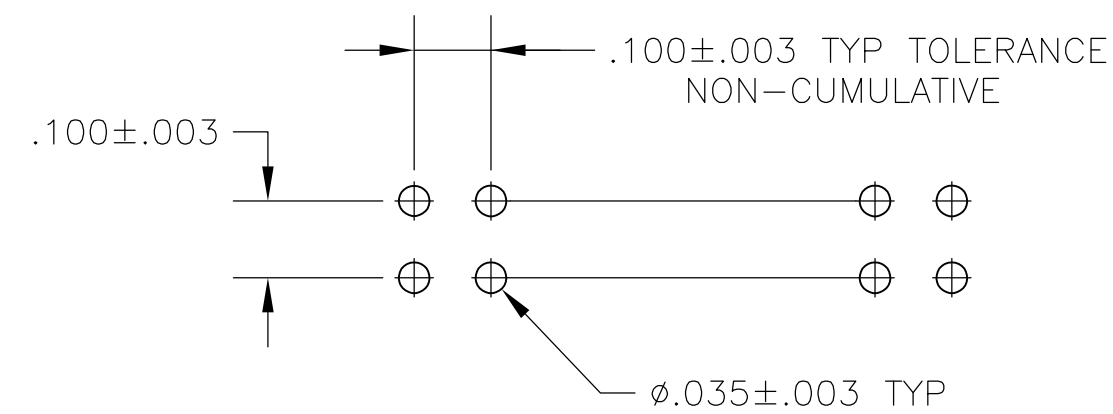
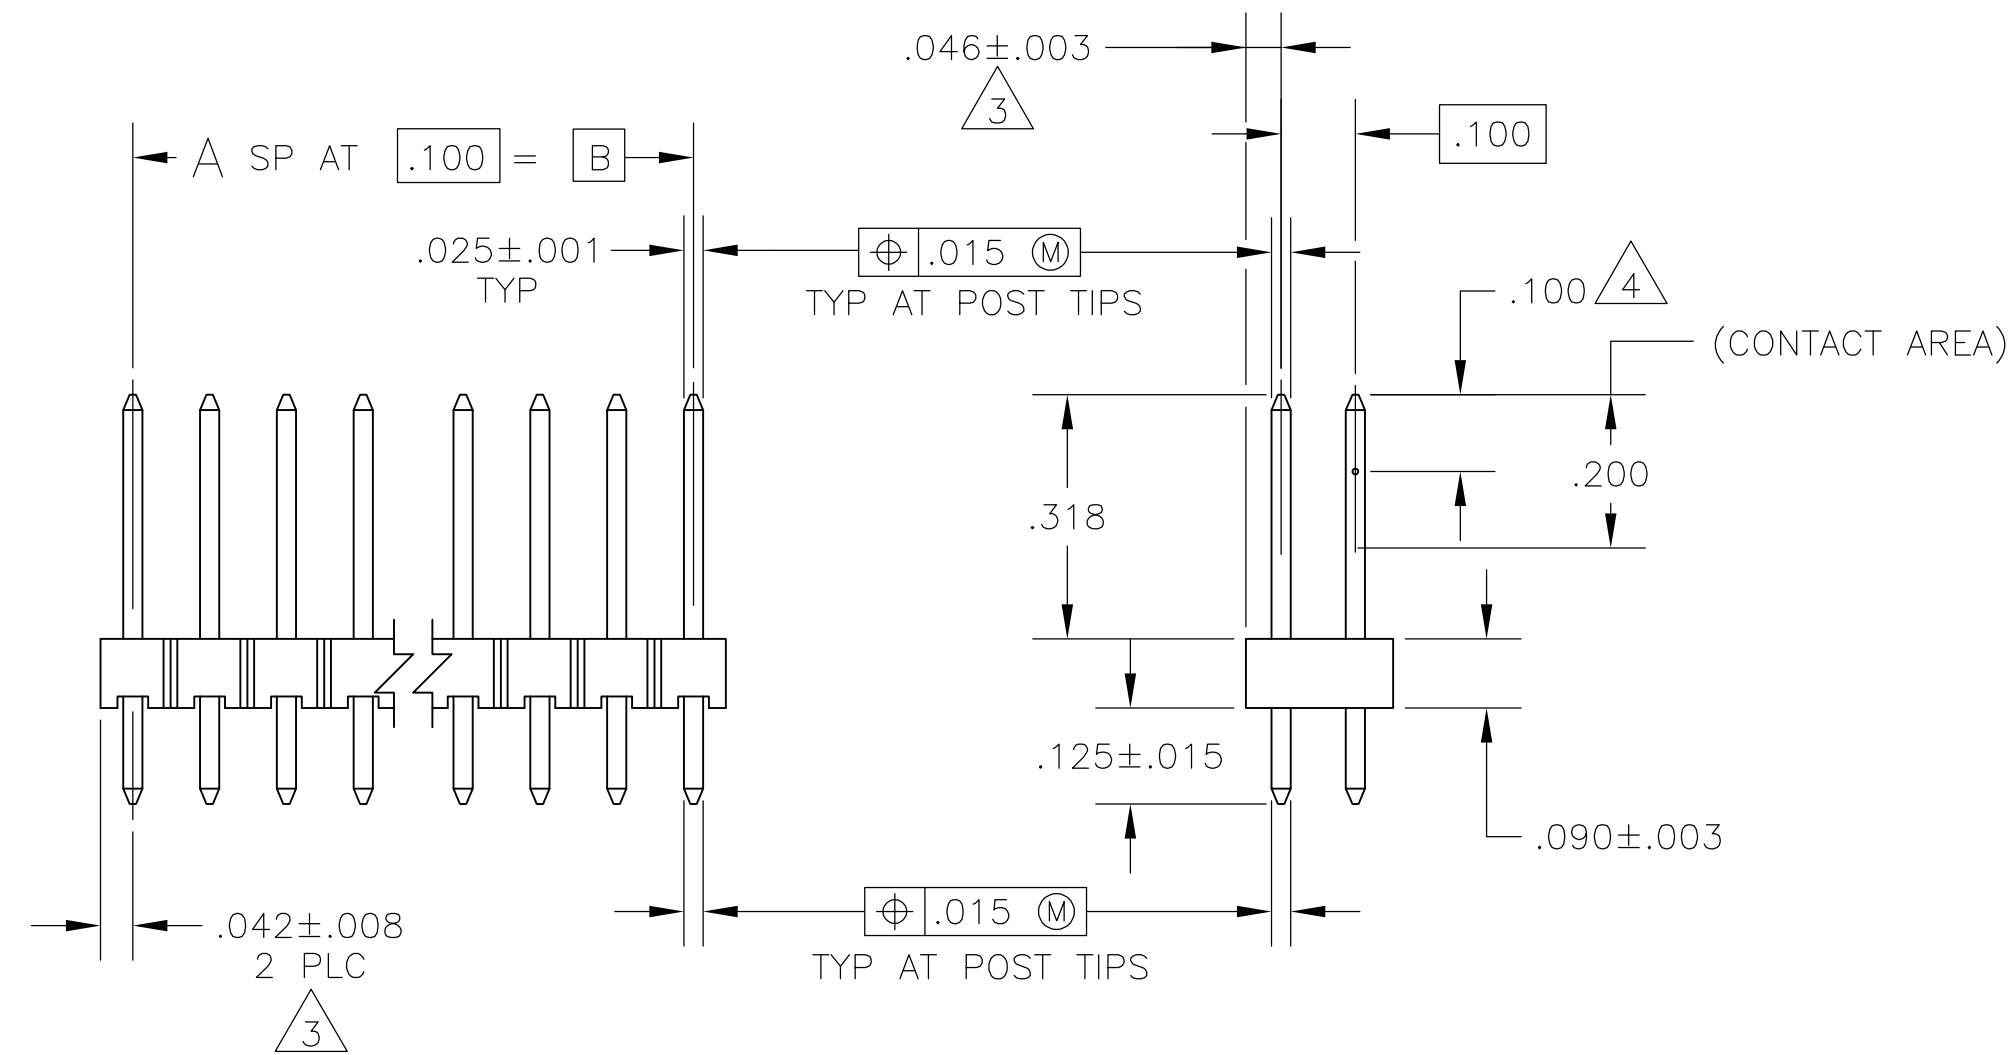


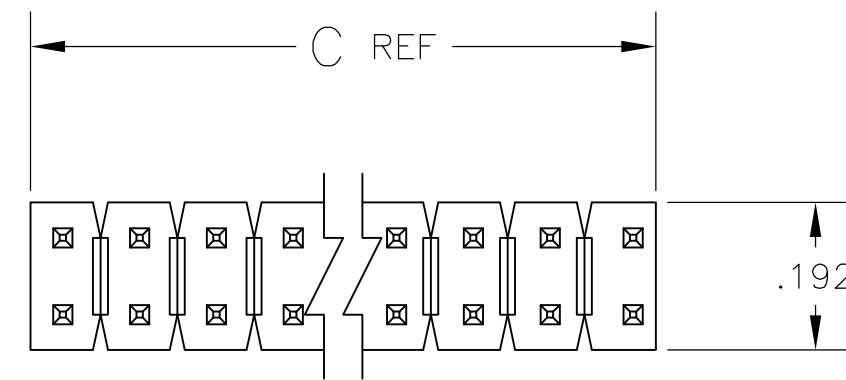

RECOMMENDED HOLE LAYOUT

- | | |
|---|---|
| 1 | ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS |
| 2 | TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD |
| 3 | THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING |
| 4 | POINT OF MEASUREMENT FOR PLATING THICKNESS |
| 5 | OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI |

 OBSOLETE	3.984	3.900	39	80	4-102973-0
	3.884	3.800	38	78	3-102973-9
	3.784	3.700	37	76	3-102973-8
	3.684	3.600	36	74	3-102973-7
	3.584	3.500	35	72	3-102973-6
	3.484	3.400	34	70	3-102973-5
	3.384	3.300	33	68	3-102973-4
 OBSOLETE	3.284	3.200	32	66	3-102973-3
	3.184	3.100	31	64	3-102973-2
	3.084	3.000	30	62	3-102973-1
	2.984	2.900	29	60	3-102973-0
	2.884	2.800	28	58	2-102973-9
	2.784	2.700	27	56	2-102973-8
	2.684	2.600	26	54	2-102973-7
 OBSOLETE	2.584	2.500	25	52	2-102973-6
	2.484	2.400	24	50	2-102973-5
	2.384	2.300	23	48	2-102973-4
	2.284	2.200	22	46	2-102973-3
	2.184	2.100	21	44	2-102973-2
	2.084	2.000	20	42	2-102973-1
	1.984	1.900	19	40	2-102973-0
 OBSOLETE	1.884	1.800	18	38	1-102973-9
	1.784	1.700	17	36	1-102973-8
	1.684	1.600	16	34	1-102973-7
	1.584	1.500	15	32	1-102973-6
	1.484	1.400	14	30	1-102973-5
	1.384	1.300	13	28	1-102973-4
	1.284	1.200	12	26	1-102973-3
 OBSOLETE	1.184	1.100	11	24	1-102973-2
	1.084	1.000	10	22	1-102973-1
	.984	.900	9	20	1-102973-0
	.884	.800	8	18	102973-9
	.784	.700	7	16	102973-8
	.684	.600	6	14	102973-7
	.584	.500	5	12	102973-6
 OBSOLETE	.484	.400	4	10	102973-5
	.384	.300	3	8	102973-4
	.284	.200	2	6	102973-3
	.184	.100	1	4	102973-2
	.084	—	—	2	102973-1
	C	B	A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN H MOLL	150C187	 TE Connectivity		
		CHK T. CLARK	200C187			
DIMENSIONS:		APVD T. CLARK	200C187	NAME	HEADER ASSY, MOD II, BREAKAWAY, DOUBLE ROW, .100X.100CL, VERTICAL, WITH .025 SQ POSTS	
INCHES		PRODUCT SPEC	—			
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		SIZE	CAD CODE DRAWING NO A1 00779 C-102973	
		0 PLC ± —				RESTRICTED TO
		1 PLC ± —				
		2 PLC ± —				
		3 PLC ± .005				
4 PLC ± —						
ANGLES		—		—		
MATERIAL:		WEIGHT	—	—		
FINISH:		—				
PLATE: FLAME RETARDANT		—				
RESIN: THERMOPLASTIC		—				
COLOR: BLACK		—				
POSTS: COPPER ALLOY		—				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		—				
0.00015 GND ON CONTACT AREA		—				
.00100-.00200 MATTE		—				
TIN-LEAD ON SOLDER TAIL		—				
ALL OVER .00005 NICKEL		—				
CUSTOMER DRAWING		—				
SCALE		4:1				
SHEET		1 OF 1				
REV		G				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-102973-2](#)