
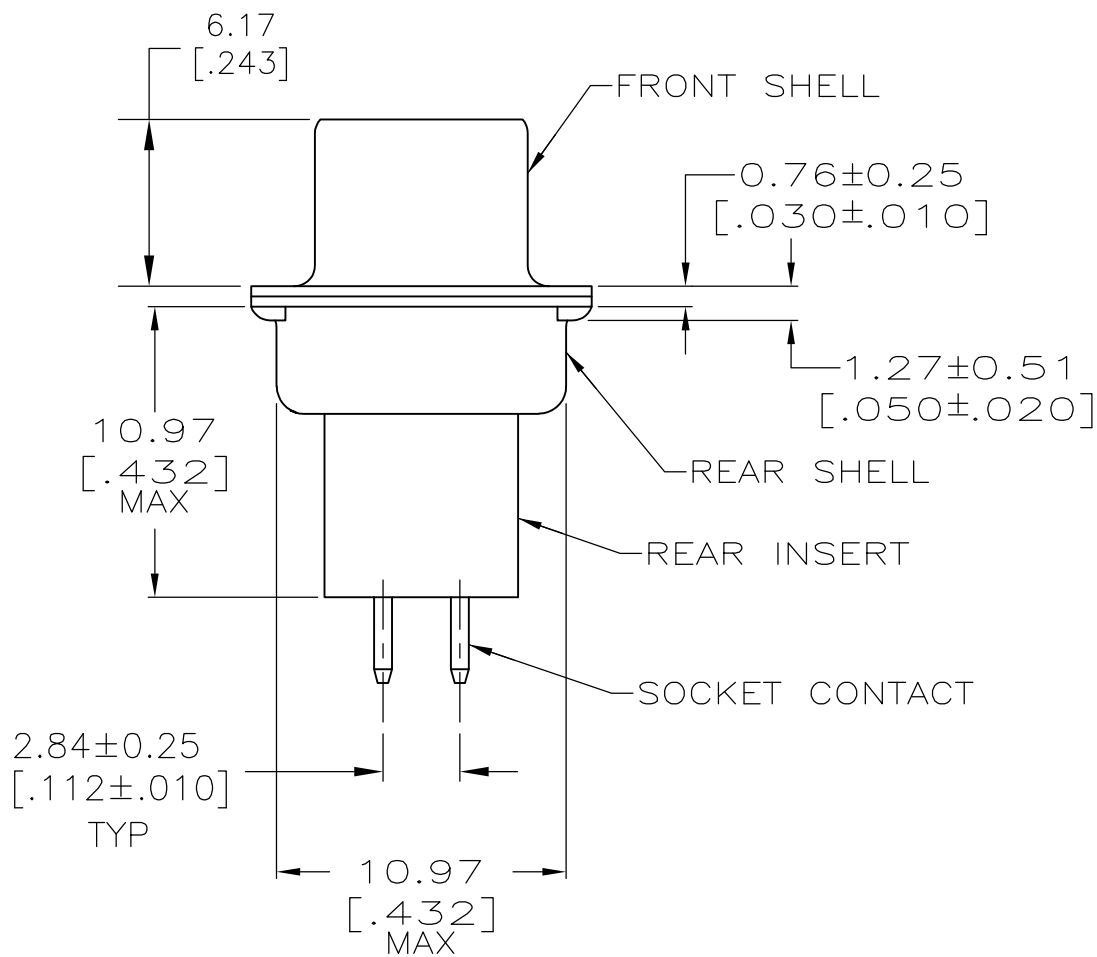
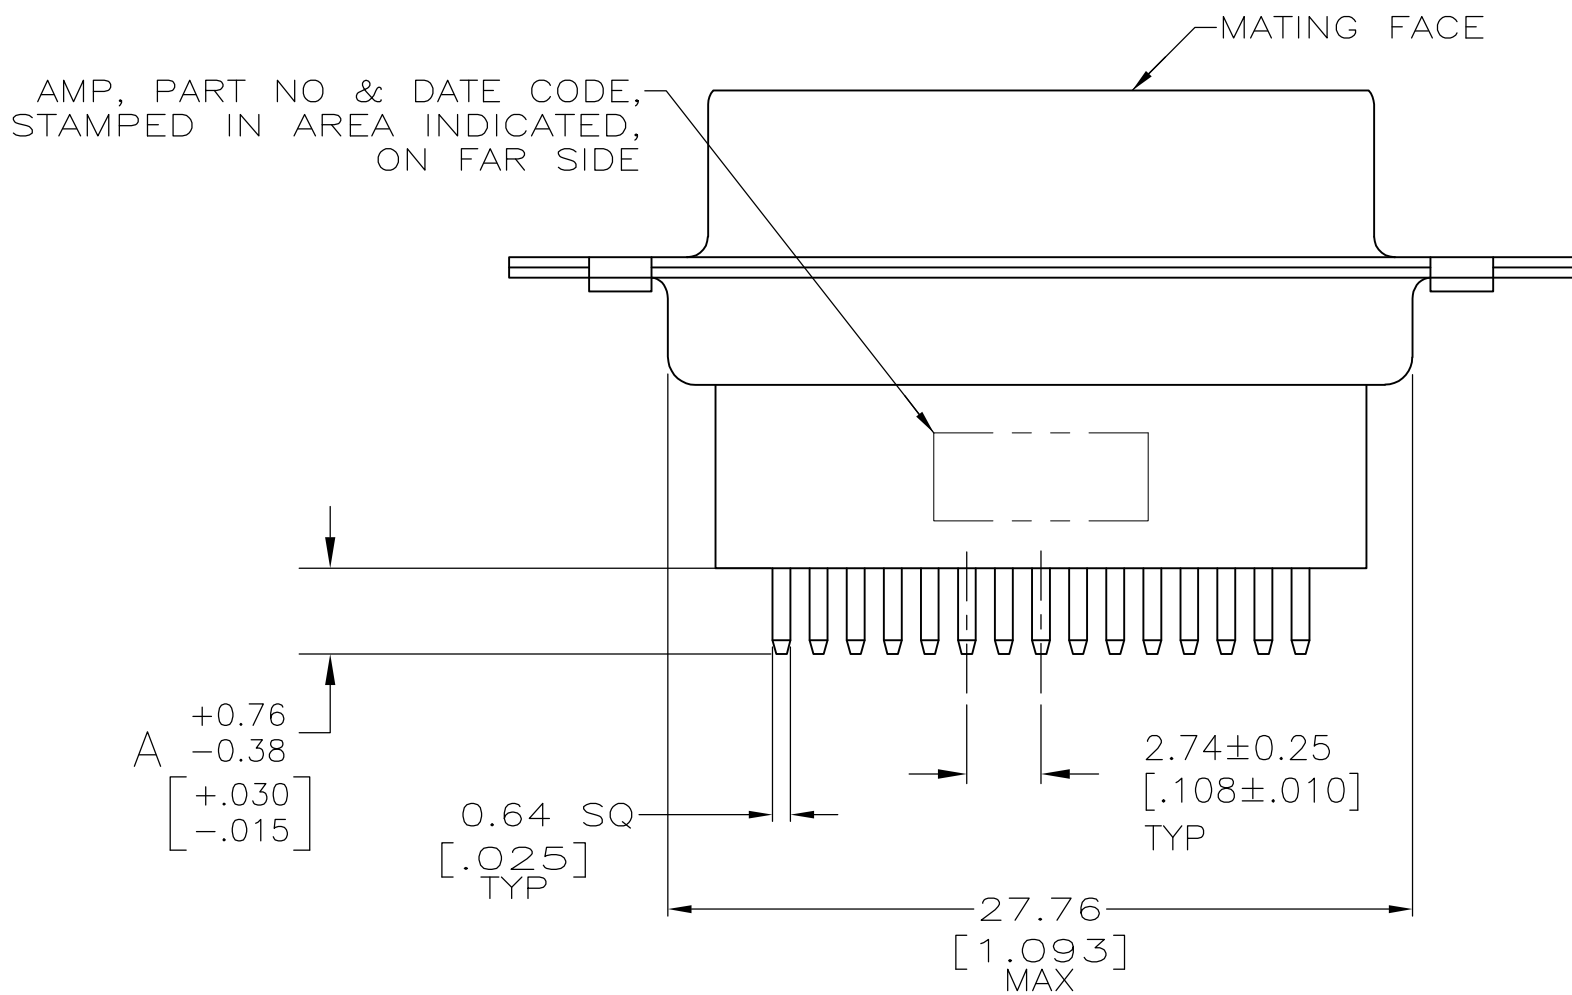


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00		Z	REVISED PER ECO-14-011808	09AUG2014	AP	SB

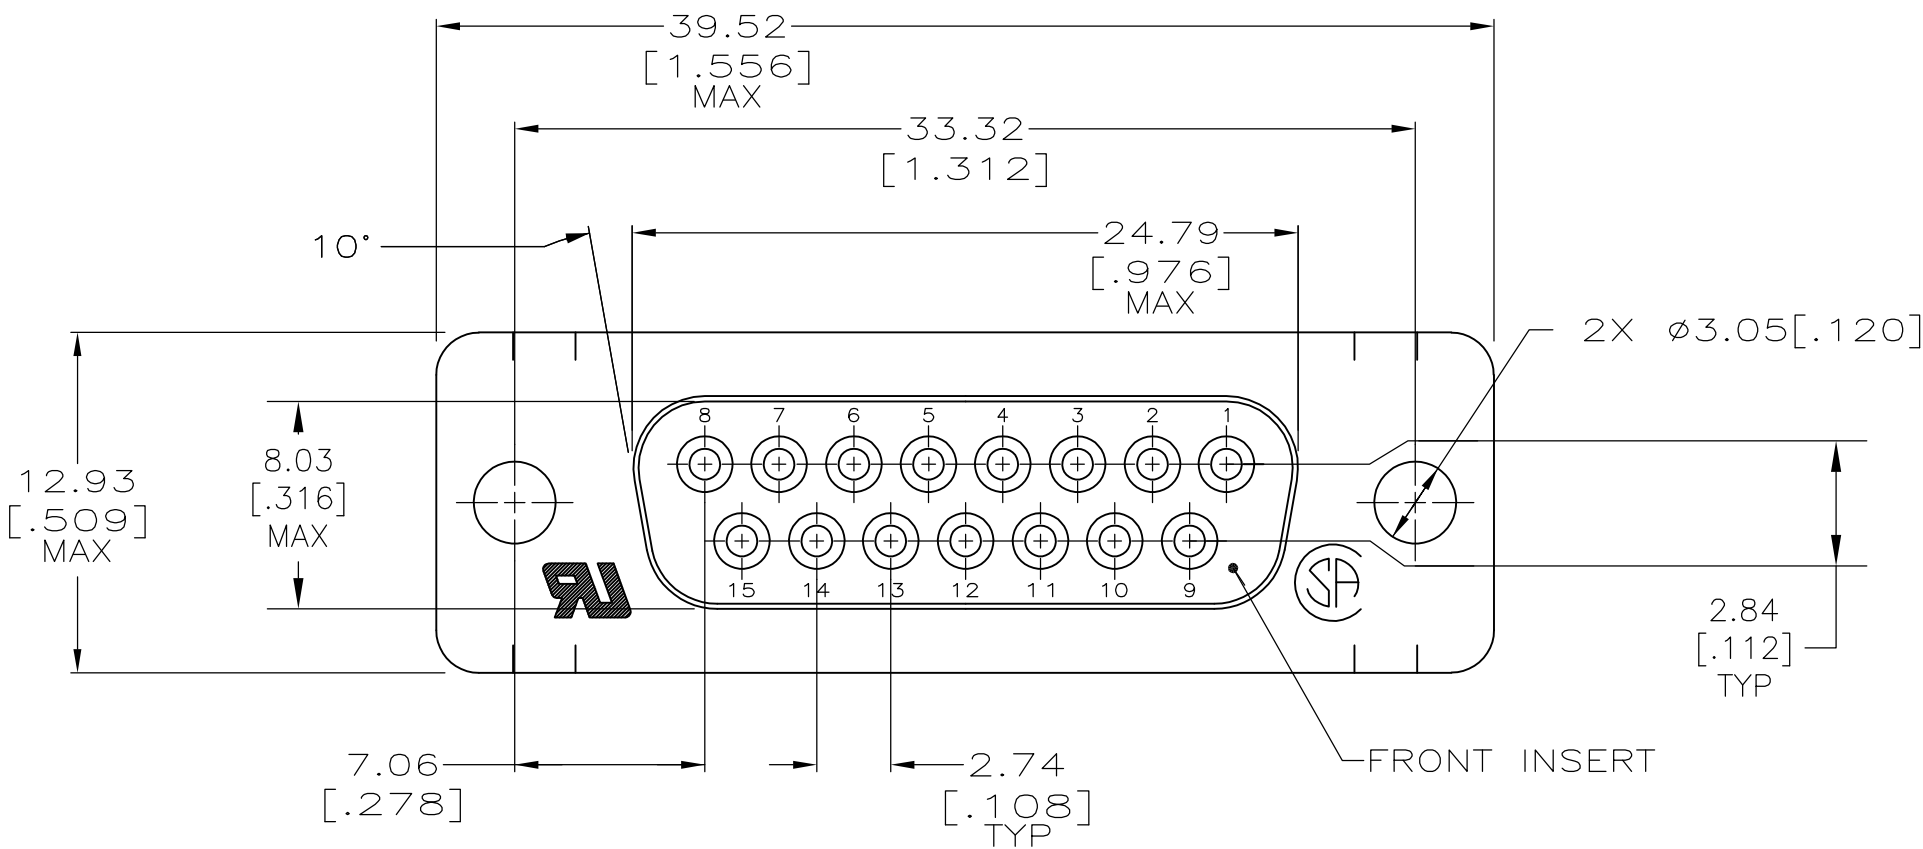

- 1

MOLDED PARTS: GLASS-FILLED PBT OR GLASS-FILLED NYLON, UL94V-0 RATED. COLOR: BLACK
SHELLS: CARBON STEEL
CONTACTS: PHOS BRONZE
- 2

SHELLS: 5.08µm [0.000200] MIN ZINC WITH YELLOW CHROMATE COATING.
CONTACTS: GOLD FLASH ON MATING END, 2.54µm [0.000100] MIN TIN-LEAD ON SOLDER END, BOTH OVER 1.27µm [0.000050] MIN NICKEL.

- 7

SHELLS: 5.08µm [0.000200] MIN ZINC WITH YELLOW CHROMATE COATING.
CONTACTS: 0.76µm [0.000030] MIN GOLD IN MATED AREA, 2.54µm [0.000100] MIN TIN-LEAD ON SOLDER END, BOTH OVER 1.27µm [0.000050] MIN NICKEL.
OR
GOLD FLASH OVER PALLADIUM-NICKEL
0.76µm [0.000030] MIN TOTAL ON MATING AREA, 2.54µm [0.000100] MIN TIN-LEAD ON SOLDER END, BOTH OVER 1.27µm [0.000050] MIN NICKEL.

3. NOTE DELETED.
4. NOTE DELETED.
5. NOTE DELETED.
- 6

NOTE DELETED.

OBSOLETE	-	-	205736-9
SUPSD BY 205736-7	2	4.78 [.188]	205736-8
	7	4.78 [.188]	205736-7
OBSOLETE	2	16.54 [.651]	205736-6
SUPSD BY 745185-5	7	16.54 [.651]	205736-5
	2	10.85 [.427]	205736-4
SUPSD BY 745185-5	7	10.85 [.427]	205736-3
SUPSD BY 205736-1	2	3.18 [.125]	205736-2
OBSOLETE	7	3.18 [.125]	205736-1
	GOLD FINISH	A	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009		DWN J. POLIGNONE 01FEB07	TE Connectivity			
DIMENSIONS: mm [INCHES]		CHK E. BRIANT 01FEB07				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD E. BRIANT 01FEB07	NAME			
		PRODUCT SPEC 108-40025	RECEPTACLE ASSY, SIZE 2, 15 POSITION, FOR PCB AMPLIMITE HDP			
MATERIAL		APPLICATION SPEC 114-40013				
1		WEIGHT -	SIZE A2	CAGE CODE 00779	DRAWING NO C=205736	RESTRICTED TO -
2 3		CUSTOMER DRAWING	SCALE NTS	SHEET 1 of 1	REV Z	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[205736-4](#)