



D

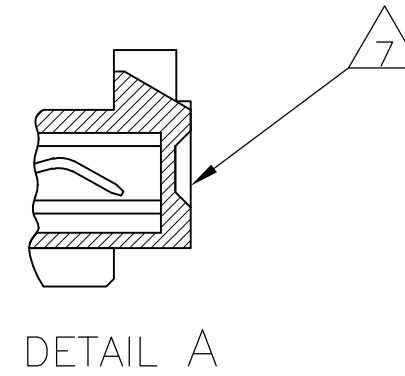

DETAIL A

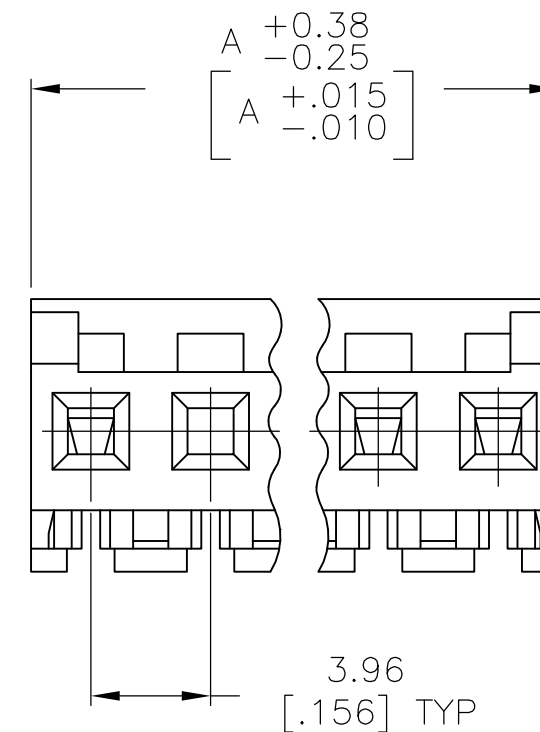

SEE DETAIL A
FOR CLOSED CIRCUIT

- 1. MATERIAL: CONNECTOR — NYLON UL94V-2 (RED).
CONTACTS — 0.30[.012] THICK COPPER ALLOY BRIGHT TIN-LEAD
0.00203[.000080] MIN THICK FOR -2 THRU -28
— 0.30[.012] THICK COPPER ALLOY MATTE WHISKER
MITIGATED TIN 0.00203[.000080] MIN THICKNESS
OVER NICKEL UNDERPLATE FOR -32 THRU -58.
 - 2. CONTACTS ACCEPT 22 AWG WIRE WITH 2.41[.095] MAX
INSULATION DIAMETER.
 - 3. CONTACTS MUST ACCEPT 1.14 ± 0.03 [.045 $\pm$.001]
POST AND REMAIN LOCKED IN POSITION.
 - 4. IDENTIFICATION NUMBER FOR LAST CIRCUIT MAY
NOT APPEAR ON ALL ASSEMBLIES.
 - 5. DIMENSIONS IN BRACKETS ARE IN INCHES.
 - 6. HOUSING FEATURES ARE: CLOSED END WITH LOCKING
RAMP AND POLARIZING TAB.
 - 7. DETAIL "A" SHOWS A CIRCUIT MOLDED CLOSED.
 - 8. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

	TIN	31.70 [1.248]	8	3-643274-8
	TIN	23.77 [.936]	6	3-643274-6
	TIN	15.85 [.624]	4	3-643274-4
D	TIN-LEAD	31.70 [1.248]	8	-643274-8-
D	TIN-LEAD	23.77 [.936]	6	-643274-6-
D	TIN-LEAD	15.85 [.624]	4	-643274-4-
	FINISH	DIM A	NO. OF CIRCUITS	PART NO.

643274

B

A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-643274-8](#)