


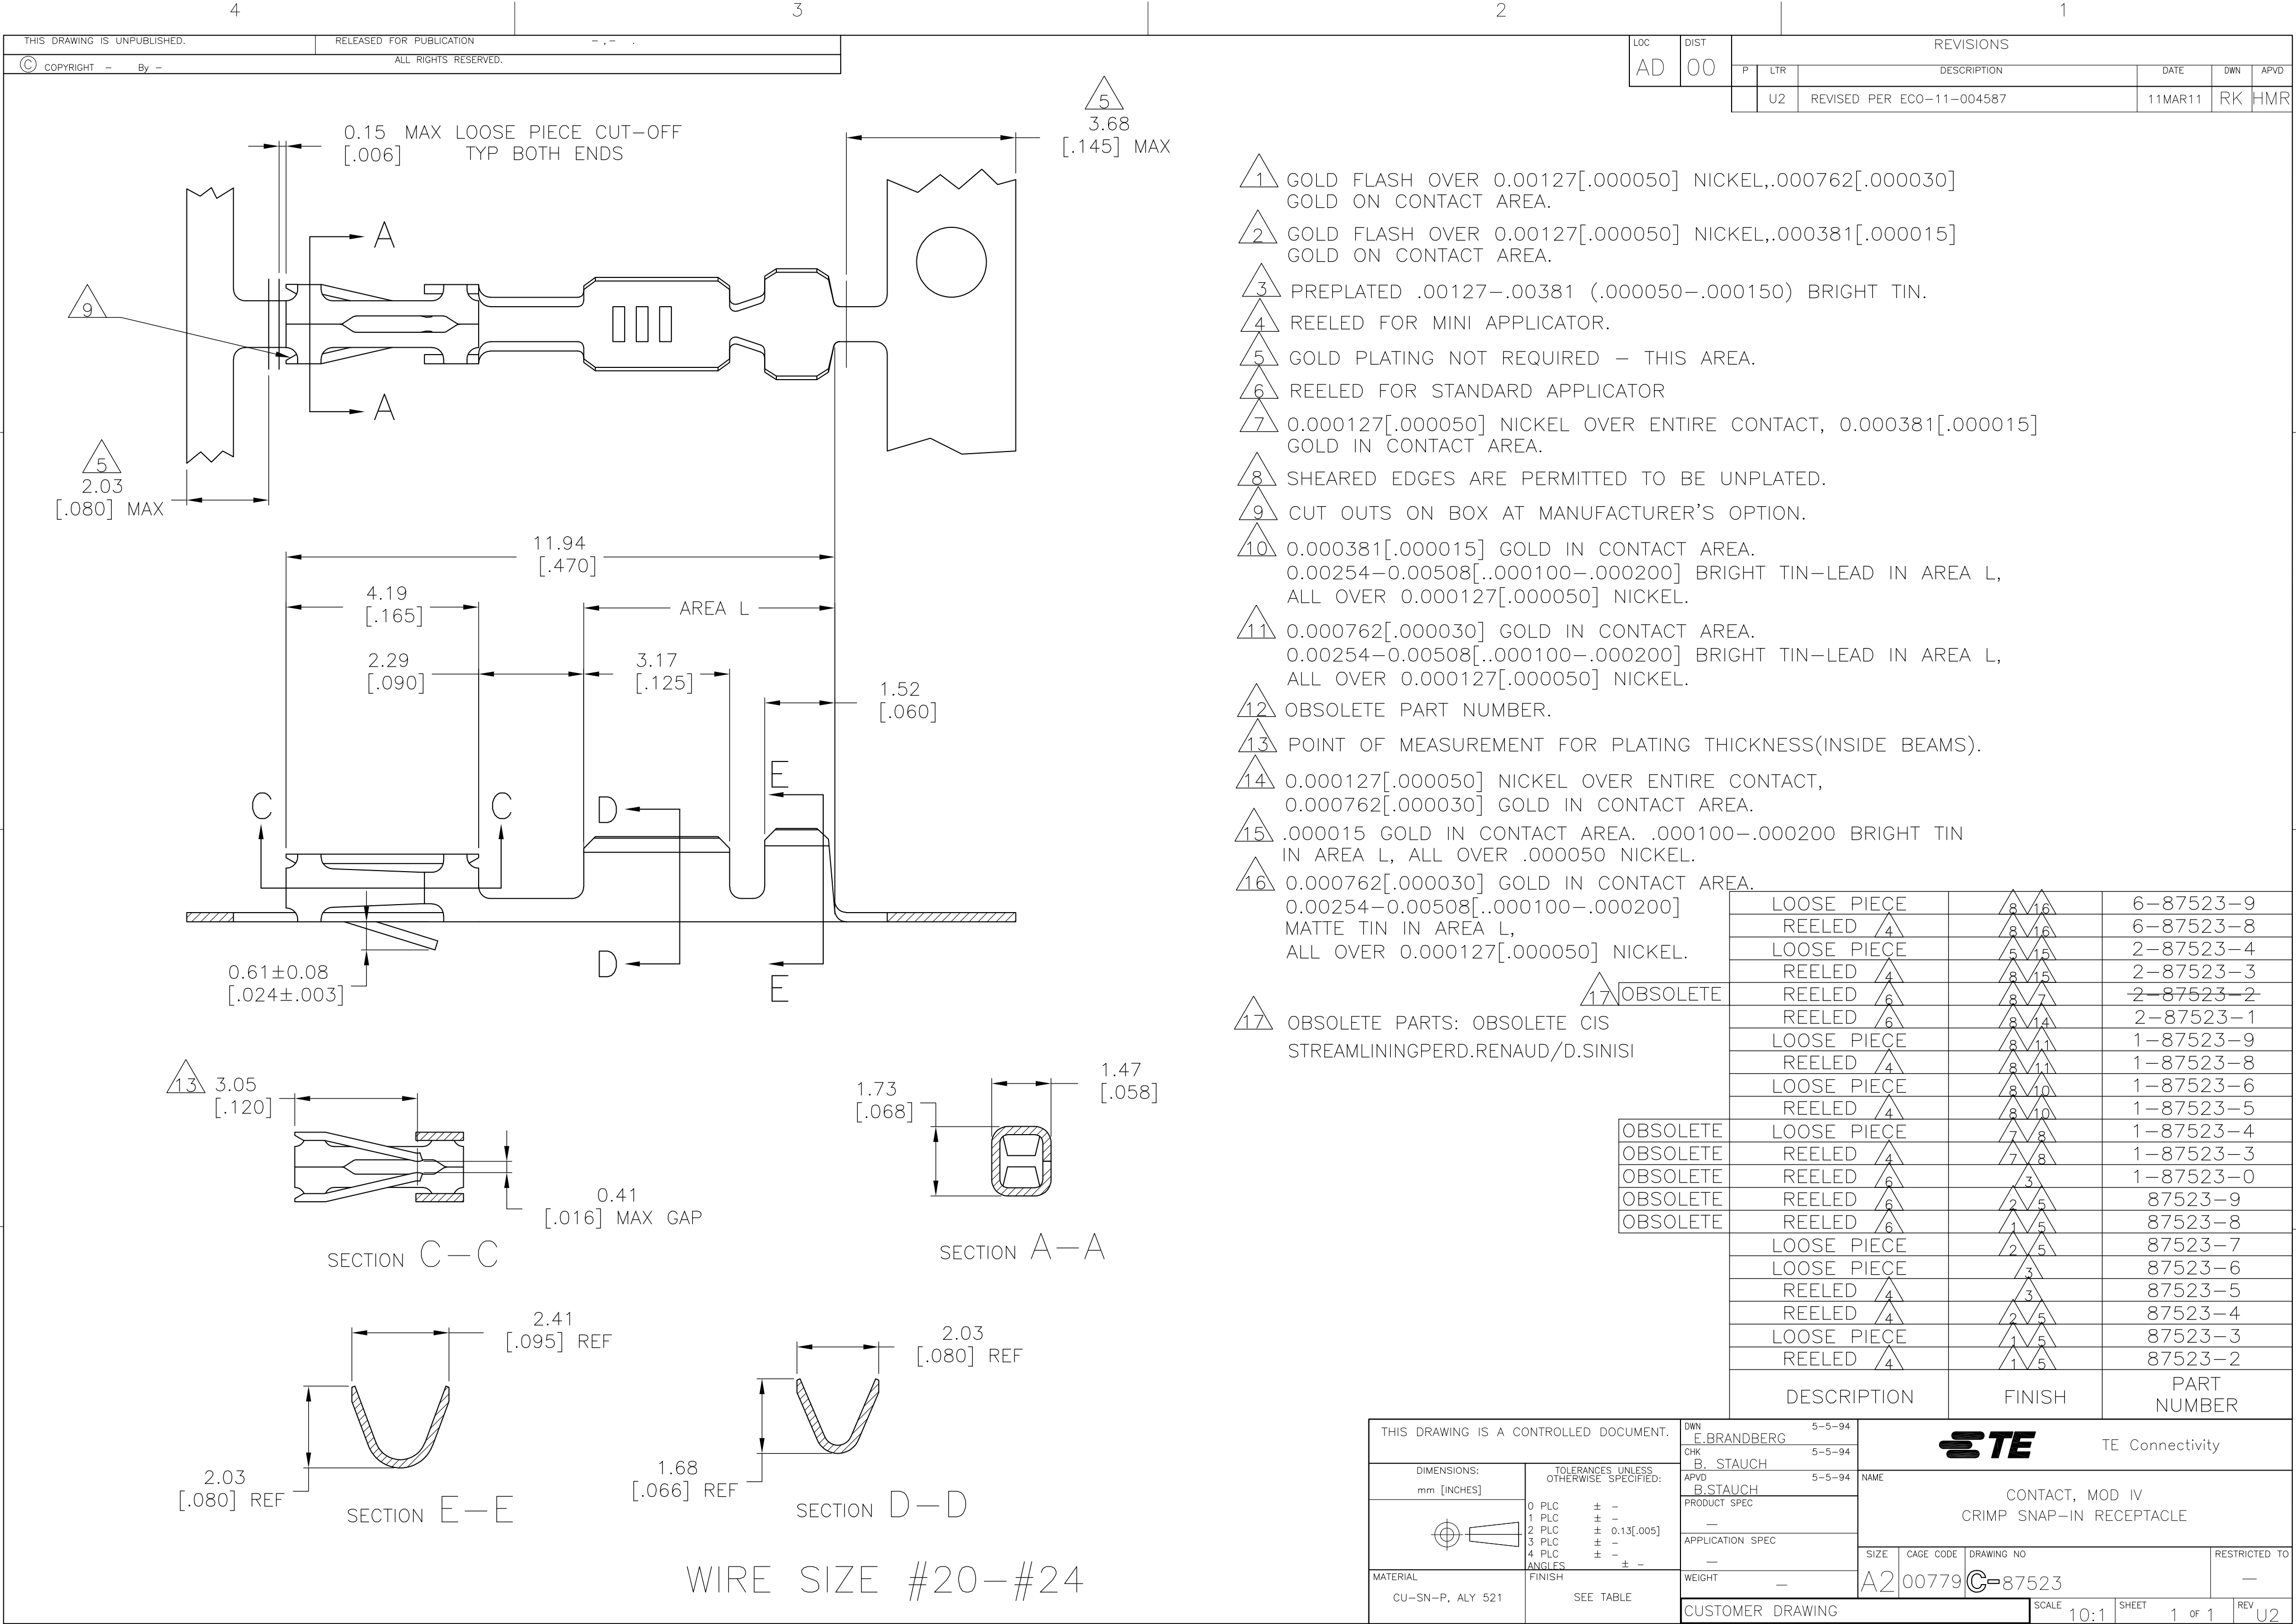

- 1 GOLD FLASH OVER 0.00127[.000050] NICKEL,.000762[.000030] GOLD ON CONTACT AREA.
- 2 GOLD FLASH OVER 0.00127[.000050] NICKEL,.000381[.000015] GOLD ON CONTACT AREA.
- 3 PREPLATED .00127-.00381 (.000050-.000150) BRIGHT TIN.
- 4 REELED FOR MINI APPLICATOR.
- 5 GOLD PLATING NOT REQUIRED - THIS AREA.
- 6 REELED FOR STANDARD APPLICATOR
- 7 0.000127[.000050] NICKEL OVER ENTIRE CONTACT, 0.000381[.000015] GOLD IN CONTACT AREA.
- 8 SHEARED EDGES ARE PERMITTED TO BE UNPLATED.
- 9 CUT OUTS ON BOX AT MANUFACTURER'S OPTION.
- 10 0.000381[.000015] GOLD IN CONTACT AREA. 0.00254-0.00508[.000100-.000200] BRIGHT TIN-LEAD IN AREA L, ALL OVER 0.000127[.000050] NICKEL.
- 11 0.000762[.000030] GOLD IN CONTACT AREA. 0.00254-0.00508[.000100-.000200] BRIGHT TIN-LEAD IN AREA L, ALL OVER 0.000127[.000050] NICKEL.
- 12 OBSOLETE PART NUMBER.
- 13 POINT OF MEASUREMENT FOR PLATING THICKNESS(INSIDE BEAMS).
- 14 0.000127[.000050] NICKEL OVER ENTIRE CONTACT, 0.000762[.000030] GOLD IN CONTACT AREA.
- 15 .000015 GOLD IN CONTACT AREA. .000100-.000200 BRIGHT TIN IN AREA L, ALL OVER .000050 NICKEL.
- 16 0.000762[.000030] GOLD IN CONTACT AREA. 0.00254-0.00508[.000100-.000200] MATTE TIN IN AREA L, ALL OVER 0.000127[.000050] NICKEL.

17 OBSOLETE PARTS: OBSOLETE CIS STREAMLININGPERD.RENAUD/D.SINISI

	LOOSE PIECE		6-87523-9
	REELED		6-87523-8
	LOOSE PIECE		2-87523-4
	REELED		2-87523-3
	REELED		2-87523-2
	REELED		2-87523-1
	LOOSE PIECE		1-87523-9
	REELED		1-87523-8
	LOOSE PIECE		1-87523-6
	REELED		1-87523-5
	LOOSE PIECE		1-87523-4
	REELED		1-87523-3
	REELED		1-87523-0
	REELED		87523-9
	REELED		87523-8
	LOOSE PIECE		87523-7
	LOOSE PIECE		87523-6
	REELED		87523-5
	REELED		87523-4
	LOOSE PIECE		87523-3
	REELED		87523-2
	DESCRIPTION	FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm [INCHES]

MATERIAL
CU-SN-P, ALY 521

SEE TABLE

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -

1 PLC ± -

2 PLC ± 0.13[.005]

3 PLC ± -

4 PLC ± -

ANGLES ± -

FINISH

5-5-94
E.BRANDBERG

5-5-94
B. STAUCH

5-5-94
B.STAUCH

PRODUCT SPEC

APPLICATION SPEC

WEIGHT -

CUSTOMER DRAWING

TE Connectivity

CONTACT, MOD IV
CRIMP SNAP-IN RECEPTACLE

SIZE A2 CAGE CODE 00779 DRAWING NO C=87523 RESTRICTED TO -

SCALE 10:1 SHEET 1 OF 1 REV U2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-87523-1](#)