

THIS DRAWING IS UNPUBLISHED.


RELEASED FOR PUBLICATION

© COPYRIGHT — BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CE	16		A1	ADD NEW DASH 1--7	09OCT07	KH	JD

- 1

MAXIMUM INSERTION LOSS IS 0.5dB PLUS CABLE ATTENUATION @ 1300nm. SEE TABLE
2. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF THE TYCO ELECTRONICS STANDARD 230-702

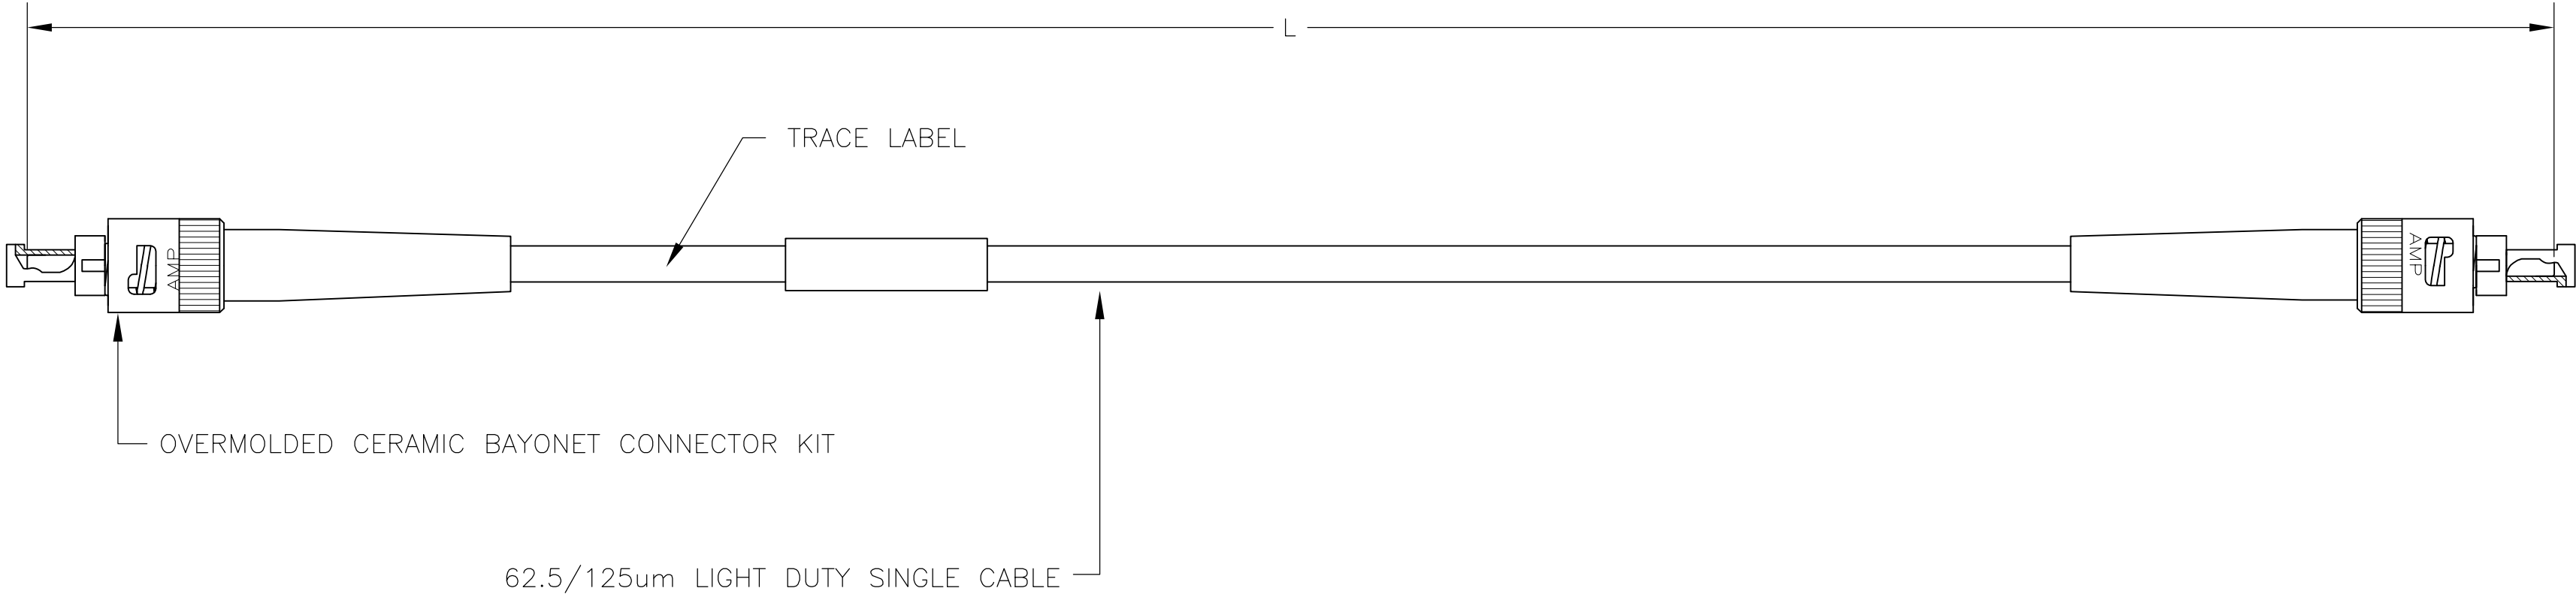

0.65	100.0±1.0 [3937.0±39.4]	1-6278789-7
0.50	4.00±0.08 [157.5±3.0]	1-6278789-6
3.5	2000.0±20.0 [78740.0±787.0]	1-6278789-5
0.95	304.8±3.0 [12000.0±120.0]	1-6278789-4
0.50	0.75±0.03 [29.5±1]	1-6278789-3
0.50	0.65±0.03 [25.6±1]	1-6278789-2
0.54	30±0.30 [1181±12]	1-6278789-1
0.53	25±0.30 [984±12]	1-6278789-0
0.53	20±0.3 [787±12]	6278789-9
0.52	15±0.15 [591±6]	6278789-8
0.51	10±0.15 [394±6]	6278789-7
0.51	8±0.15 [315±6]	6278789-6
0.51	6±0.08 [236±3]	6278789-5
0.50	5±0.08 [197±3]	6278789-4
0.50	3±0.05 [118±2]	6278789-3
0.50	2±0.05 [79±2]	6278789-2
0.50	1±0.05 [39±2]	6278789-1
1 MAX IL (dB)	L METERS [INCHES]	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: METERS [INCHES]

MATERIAL

-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -
FINISH

-

DWN C.S.VASU 03 FEB 06
CHK J.DUNCAN 03 FEB 06
APVD J.DUNCAN 03 FEB 06

PRODUCT SPEC
APPLICATION SPEC
WEIGHT -

CUSTOMER DRAWING

Tyco Electronics Corporation
Harrisburg, Pa 17105-3608

NAME
CABLE ASSEMBLY, FIBER OPTIC,
62.5/125µm LDS,
OVERMOLDED CERAMIC BAYONET, OPTIMATE

SIZE
A2

CAGE CODE
00779

DRAWING NO
C=6278789

RESTRICTED TO
-

SCALE
NTS

SHEET
1

OF
1

REV
A1

AMP 1471-9 REV 31MAR2000

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-6278789-7](#)