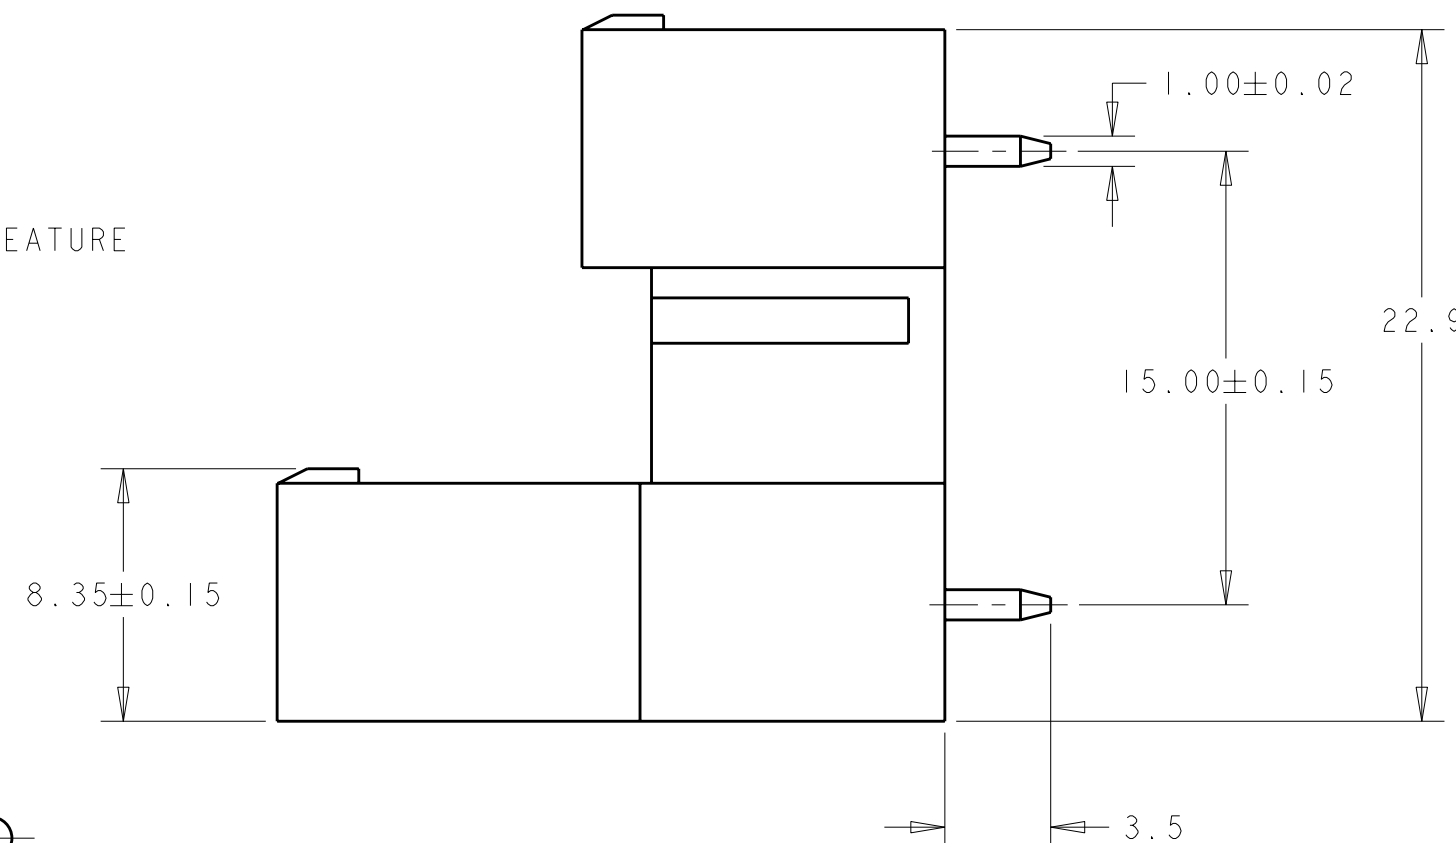







3. P/N FROM 1776164-4 TO 1776164-8 ARE OBTAINED BY ASSEMBLING 1776164-2 AND 1776164-3 TO ACHIEVE THE DESIRED NUMBER OF POSITIONS.



44.5	42.0	8	1776164-8
39.5	37.0	7	1776164-7
34.5	32.0	6	1776164-6
29.5	27.0	5	1776164-5
24.5	22.0	4	1776164-4
19.5	17.0	3	1776164-3
14.5	12.0	2	1776164-2
B	A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. WELDON		2JUL2005		 TE Connectivity	
DIMENSIONS:		CHK C. RICHARD		2JUL2005		NAME TERMINAL BLOCK HEADER ASSEMBLY, MULTIPLE, 180 DEGREE, CLOSED ENDS, 5.00mm PITCH	
mm		APVD C. RICHARD		2JUL2005			
		PRODUCT SPEC		-			
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±.3 1 PLC ±.25 3 PLC ±.25 4 PLC ±.3 ANGLES ±2 FINISH		APPLICATION SPEC		-			
MATERIAL		WEIGHT		-		SIZE A2	
				CAGE CODE 00779		DRAWING NO C-1776164	
CUSTOMER DRAWING				SCALE		RESTRICTED TO -	
				SHEET		OF	
				REV		01	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1776164-6](#)