


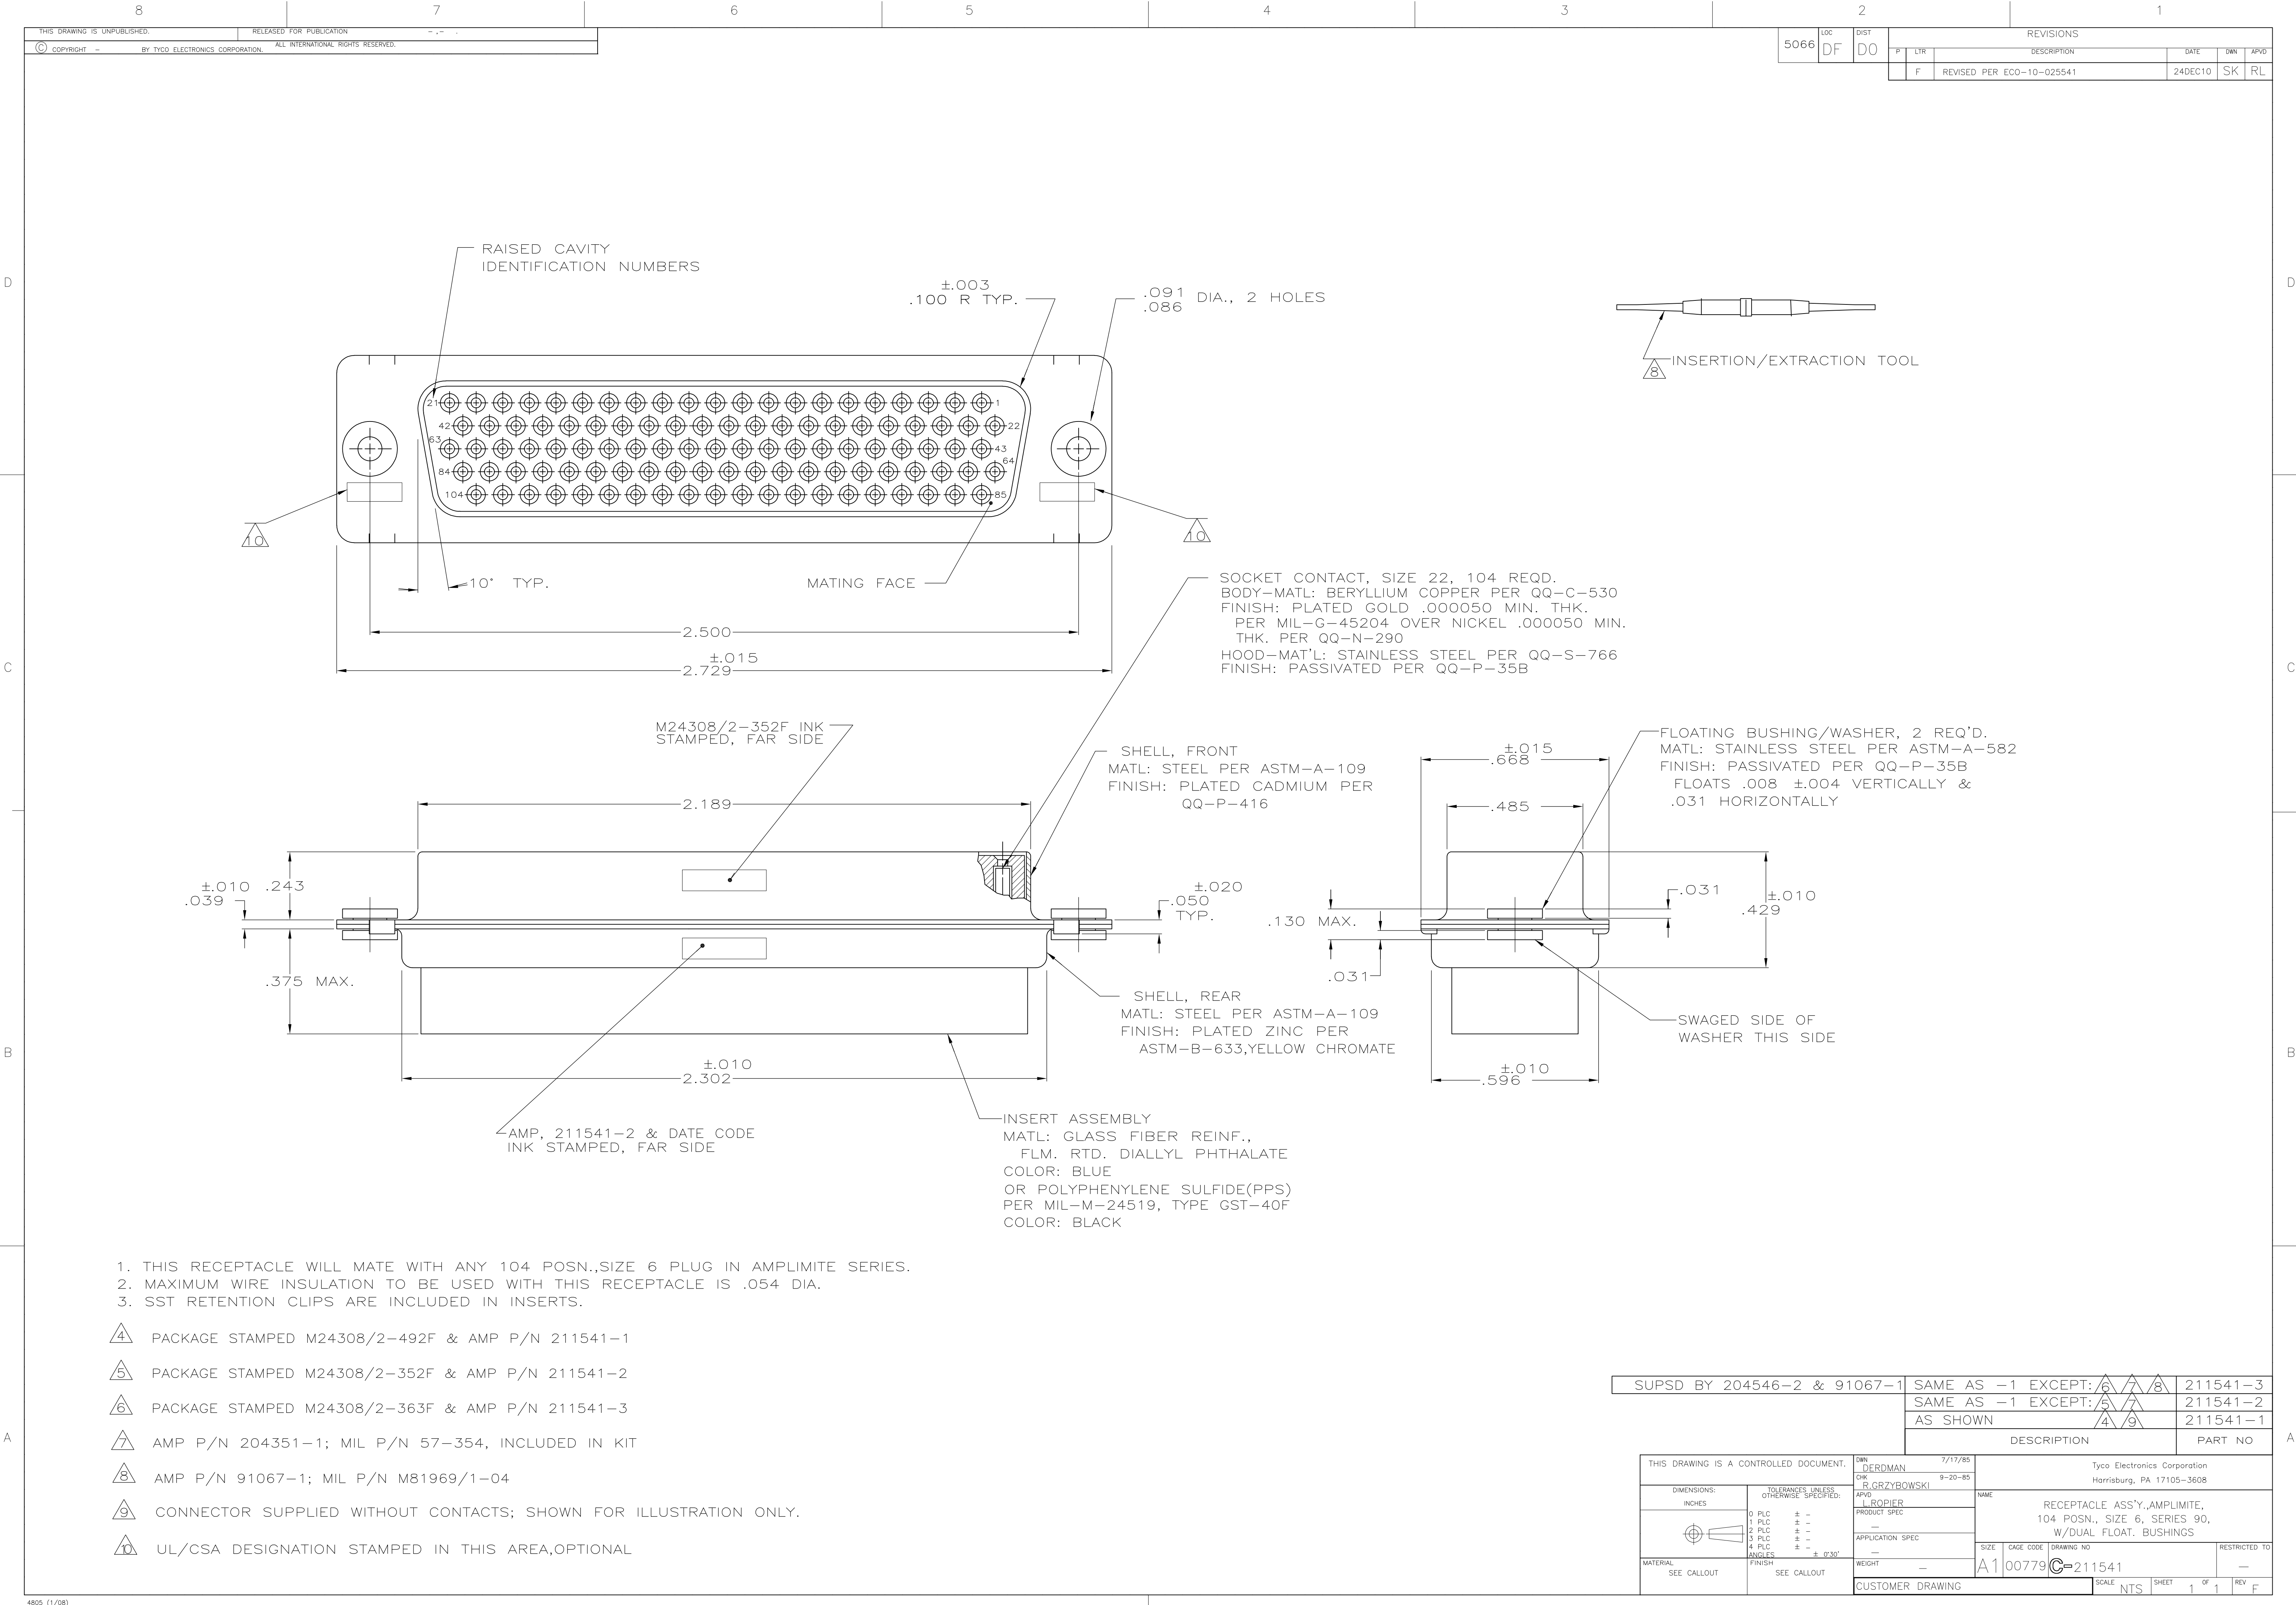

1. THIS RECEPTACLE WILL MATE WITH ANY 104 POSN., SIZE 6 PLUG IN AMPLIMITE SERIES.
2. MAXIMUM WIRE INSULATION TO BE USED WITH THIS RECEPTACLE IS .054 DIA.
3. SST RETENTION CLIPS ARE INCLUDED IN INSERTS.

- 4 PACKAGE STAMPED M24308/2-492F & AMP P/N 211541-1
5 PACKAGE STAMPED M24308/2-352F & AMP P/N 211541-2
6 PACKAGE STAMPED M24308/2-363F & AMP P/N 211541-3
7 AMP P/N 204351-1; MIL P/N 57-354, INCLUDED IN KIT
8 AMP P/N 91067-1; MIL P/N M81969/1-04
9 CONNECTOR SUPPLIED WITHOUT CONTACTS; SHOWN FOR ILLUSTRATION ONLY.
10 UL/CSA DESIGNATION STAMPED IN THIS AREA, OPTIONAL

SUPSD BY 204546-2 & 91067-1	SAME AS -1 EXCEPT: 6 7 8		211541-3
	SAME AS -1 EXCEPT: 5 7		211541-2
	AS SHOWN 4 9		211541-1
	DESCRIPTION		PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 7/17/85 CHK 9-20-85 R. GRZYBOWSKI	Tyco Electronics Corporation Harrisburg, PA 17105-3608				
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD L. ROPIER	NAME				
		PRODUCT SPEC	RECEPTACLE ASS'Y., AMPLIMITE, 104 POSN., SIZE 6, SERIES 90, W/DUAL FLOAT, BUSHINGS				
	1 PLC ± . 1 PLC ± . 2 PLC ± . 4 PLC ± . ANGLES ± .8°/3°	APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
		WEIGHT	A1 00779 C-211541			—	
MATERIAL SEE CALLOUT	FINISH SEE CALLOUT	CUSTOMER DRAWING		SCALE	NTS	SHEET 1 OF 1	REV F

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[211541-1](#)