

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0757830126

Status:

Active

Overview:

iPass Connector System

Description:

iPass I/O Surface Mount Receptacle, Right-Angle, Internal Assembly with Shell, 36 Circuit, 0.38µm Gold (Au), Surface Mount Option, Tail Length 1.96mm, Universal Key

Documents:

3D Model

3D Model (PDF)

Drawing (PDF)

Product Specification PS-75783-001-001 (PDF)

Packaging Specification PK-75783-002 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

CSA

LR19980

UL

E29179

General

Product Family

I/O Connectors

Series

75783

Application

Wire-to-Board

Comments

Positive or passive latching cable available

Component Type

Receptacle

Electrical Model

Yes

Overview

iPass Connector System

Product Name

iPass, Mini Multi-Lane, PCI Express

Type

N/A

UPC

822350092302

Physical

Circuits (Loaded)

36

Circuits (maximum)

36

Color - Resin

Black

Durability (mating cycles max)

50

Flammability

94V-0

Gender

Female

Keying to Mating Part

Yes

Lock to Mating Part

None

Material - Metal

Copper-Nickel-Zinc, High Performance Alloy (HPA)

Material - Plating Mating

Gold

Material - Plating Termination

Tin

Material - Resin

High Temperature Thermoplastic

Net Weight

3.067/g

Number of Rows

2

Orientation

Right Angle

PC Tail Length

1.96mm

PCB Locator

Yes

PCB Retention

Yes

PCB Thickness - Recommended

1.57mm

Packaging Type

Embossed Tape on Reel

Panel Mount

No

Pitch - Mating Interface

0.80mm

Pitch - Termination Interface

0.80mm

Plating min - Mating

0.381µm

Plating min - Termination

2.540µm

Polarized to Mating Part

Yes

Ports


1

Surface Mount Compatible (SMC)

Yes

Temperature Range - Operating

-40° to +80°C

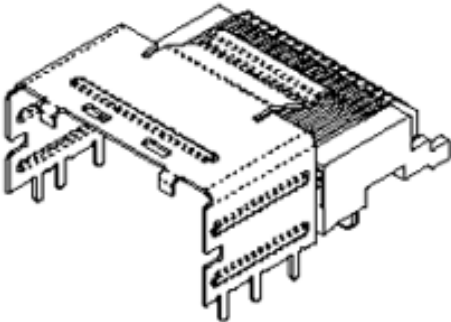

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Not Contained Per -
ECHA_01_2020 (16
January 2020

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

75783 Series

Use With

iPass Cable Assemblies, [79575](#) , [79576](#) ,
[74562](#) , [74563](#) , [79536](#) , [74573](#) ,

Termination Interface: Style	Surface Mount and Through Hole
Waterproof / Dustproof	No
Wire Insulation Diameter	N/A
Wire Size AWG	N/A
Electrical	
Current - Maximum per Contact	0.5A
Grounding to Panel	None
Voltage - Maximum	30V AC (RMS)/DC
Solder Process Data	
Duration at Max. Process Temperature (seconds)	020
Lead-freeProcess Capability	REFLOW
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	260
Material Info	
Reference - Drawing Numbers	
Electrical Model Document	EE-75586-001
Packaging Specification	PK-75783-002
Product Specification	PS-75783-001-001
S-Parameter Model	SP-75586-001
Sales Drawing	SD-75783-001-001

This document was generated on 04/14/2020

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[75783-0126](#)