

UNCONTROLLED DOCUMENT


PART NUMBER
SSL-LX25783HGW

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
Α	E.C.N. #10702.	1.10.01

REV.



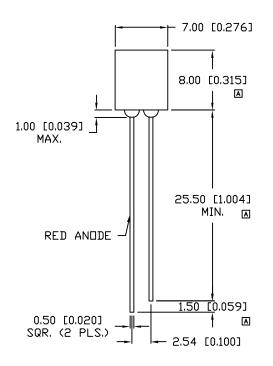



ELECTRO-OPTICAL CHARACTERISTICS TA=25°C If=20mA					
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		700 (RED)		nm	
		565 (GREEN	I)	nm	
FORWARD VOLTAGE (R,	/G)	2.0/2.2	2.5/2.6	V_{f}	
REVERSE VOLTAGE	5.0			V_r	Ir=100µA
AXIAL INTENSITY		3		mcd	If = 20mA
VIEWING ANGLE		60		2x theta	
EMITTED COLOR:	RED/GREEN				
EPOXY LENS FINISH:	MILKY WHITE	DIFFUSED			

LIMI12	Ü۲	SAFE	OPERATION	ΑI	25°C
PARAM	ETEI	R		С	OLORS

PARAMETER	COLORS	MAX	UNITS
PEAK FORWARD CURRENT*		150	mA
STEADY CURRENT		25	mA
POWER DISSIPATION		105	mW
DERATE FROM 25°C		-1.2	mW/°C
OPERATING, STORAGE TEMP.		-40 TO +85	•C
SOLDERING TEMP.		+ 260	. C
2.0mm FROM BODY			3 SEC. MAX

^{*} t<10µS

UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= $\frac{+0.00}{-0.000}$ MAX. = $\frac{+0.00}{-0.000}$ MAX.

REV.

PART NUMBER SSL-LX25783HGW

2.3mm x 8mm RECTANGULAR LED, BICOLOR RED/GREEN, MILKY WHITE DIFFUSED LENS.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC.. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



CT

290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com

TW WEB: www.lumex.com.tw CHECKED BY: APPROVED BY: DATE: DRAWN BY:

5.3.95 PAGE: 1 OF 1 SCALE: N/A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSL-LX25783HGW