
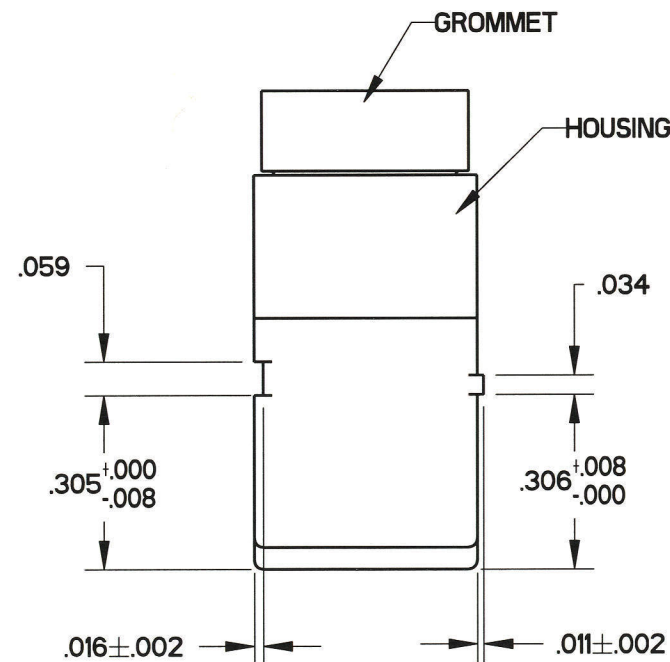
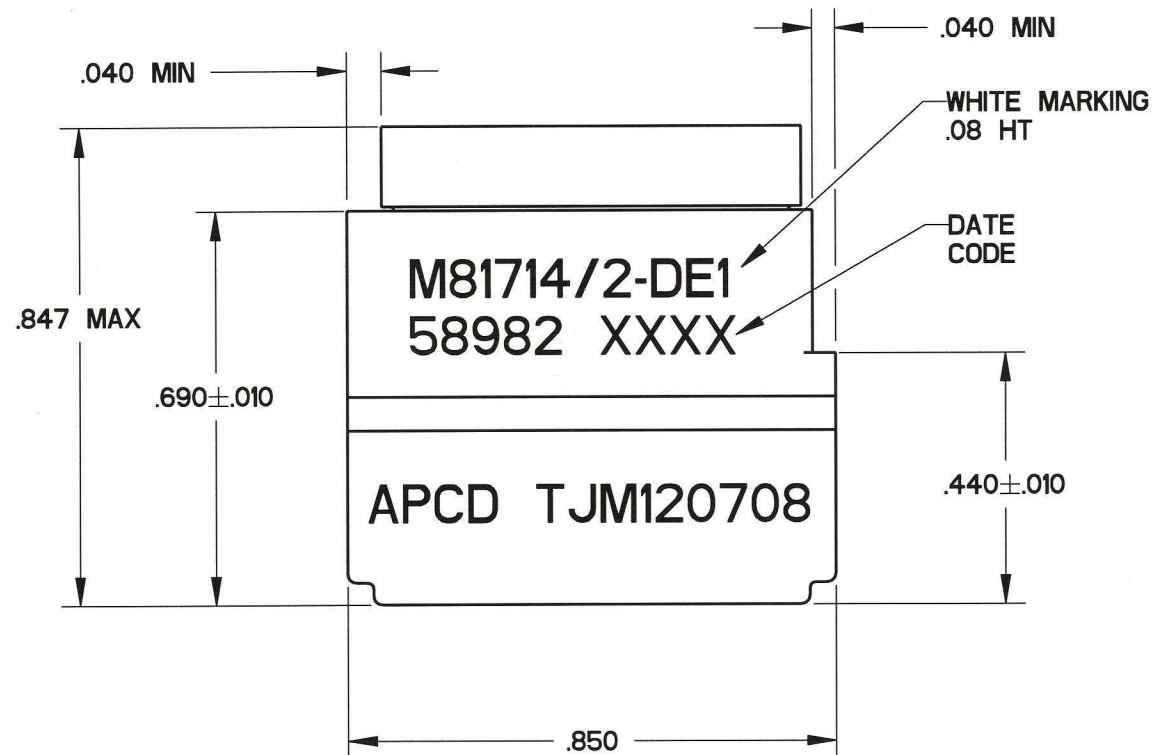
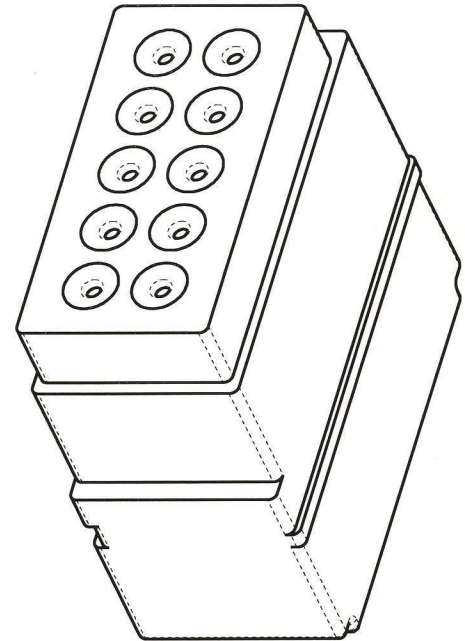


TJM120608

REV	ECN	APP'D
C	5814	DT 4-13-06

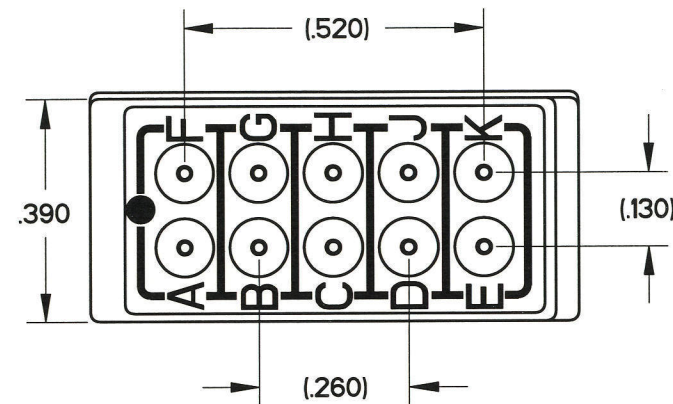

NOTES:

1. PERFORMANCE:

- MEETS PERFORMANCE AND ENVIRONMENTAL REQUIREMENTS OF MIL-T-81714/2
- MODULES ARE TO BE MOUNTED INTO RACK ASSEMBLY M81714/5 OR/16 OR COMMERCIAL EQUIVALENT.
- DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS AT SEA LEVEL, 200 VRMS AT 100,000 FEET.
- OPERATING TEMPERATURE: -65 C TO 200 C.
- CURRENT RATING: 7.5 AMPS
- VIBRATION AND SHOCK: MIL-T-81714 PARAGRAPH 3.5.5 AND 3.5.8

2. MATERIALS:

- HOUSING - POLYETHERIMIDE, COLOR: BLACK.
- GROMMET - SILICONE ELASTOMER, COLOR: BLUE
- INTERNAL CONTACTS - COPPER ALLOY, GOLD PLATED
- CONTACT RETAINERS - STAINLESS STEEL.

APCD P/N	SUPPLIED				MARKING		CLASS
	QTY.	MIL. P/N	APCD P/N	QTY.	APCD P/N	APCD QPL NO.	
TJM120608	--	--	--	--	--	TJM120708	M81714/2-DE1
TJM120708	11	M39029/H-101	CNP006000	2	CNA032401		D

DIMENSIONS	TOLERANCES	PROJECTION	TITLE				
ANSI Y14.5M UNITS: INCHES Pro/E FILE	.XX ±0.01 .XXX ±0.005 ANGLES ±2.0°		TERMINAL JUNCTION MODULE SZ 20 FEEDBACK, DE1				
ORIGINAL 	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD INC., PEABODY, MA		Amphenol Pcd				
			SPECIFICATION DRAWING				
			DRWN				
			A. SWEEZEY 03/09/06				
			ENGR				
R. SWAINE 03/01/06			SIZE		DWG NO.		
APPD			B		TJM120608		
			CODE: 58982		SCALE: 3:1	SHEET 1 OF 1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[TJM120708](#)