


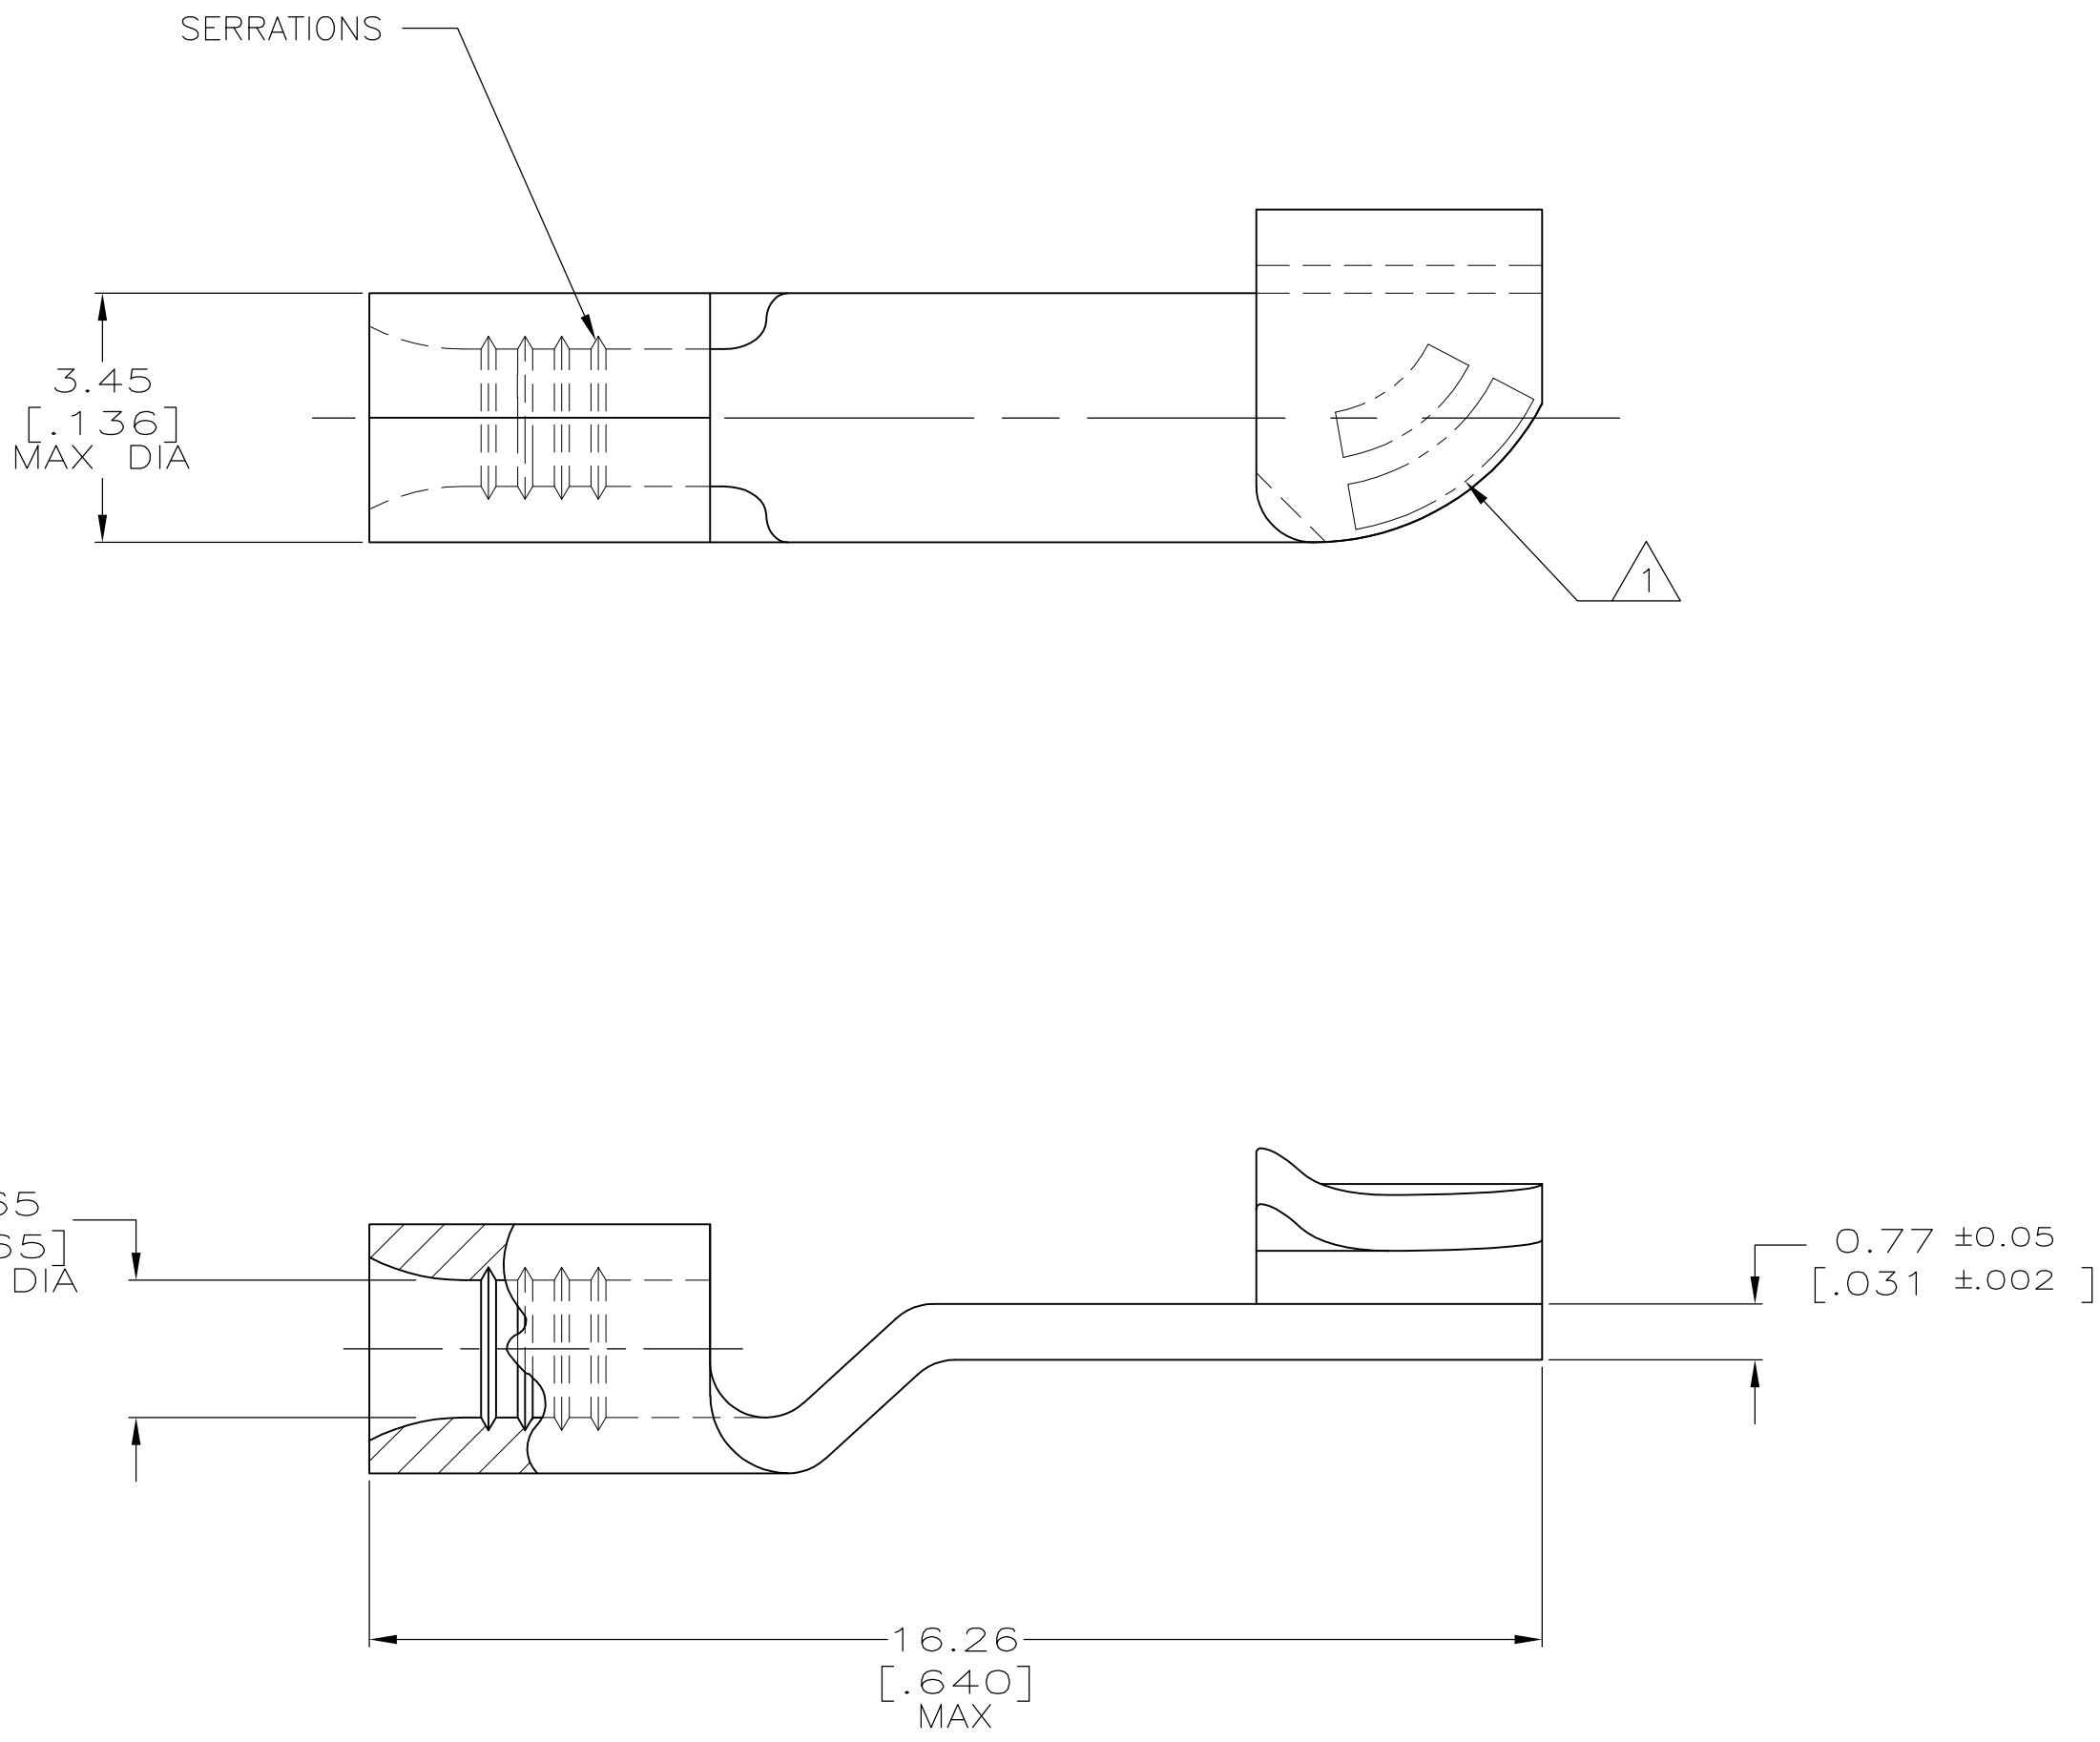

AMP WIRE RANGE	UL E13288 RECOGNIZED
22-16 AWG STRANDED	22-16 AWG STRANDED

SP LR7189 Certified	MILITARY P/N AND CLASS
NOT CERTIFIED	NOT APPLICABLE

- 1

STAMP AMP 22-18* APPROX AS SHOWN
22-16 TERMINALS ARE STAMPED 22-18 IN
ACCORDANCE WITH MILITARY SPEC MIL-T-7928
COMMERCIAL WIRE RANGE IS 22-16
- 2

TIN PLATE 0.00254[.000100] MIN THK
PER MIL-T-10727
- 3

SILVER PLATE 0.01270[.000500] MIN THK
PER QQ-S-365

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 170° C MAX
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: NOT APPLICABLE
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	WIRE CROSS SECTIONAL AREA RANGE: 0.26-1.65mm ² [509-3,260] CIR MILS STRANDED
FOR ORDER ENTRY	1-800-526-5142	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

SUPERSEDED BY 35610

3	2-31769-3
2	31769
FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± - FINISH
MATERIAL COPPER PER ASTM B-152 ANNEALED	SEE TABLE

DWN DK SCHRUM 29JUN94	CHK DA PATTERSON 08AUG94	APVD CH KULYNYCH 08AUG94
PRODUCT SPEC		
APPLICATION SPEC		
WEIGHT -	SIZE A2	CAGE CODE 00779
CUSTOMER DRAWING		

TE TE Connectivity

NAME
TERMINAL, KNIFE DISCONNECT,
BUDGET

SIZE A2	CAGE CODE 00779	DRAWING NO C-31769	RESTRICTED TO -
SCALE 10:1			SHEET 1 OF 1
REV C1			

1471-9 (3/11)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[31769](#)