




D

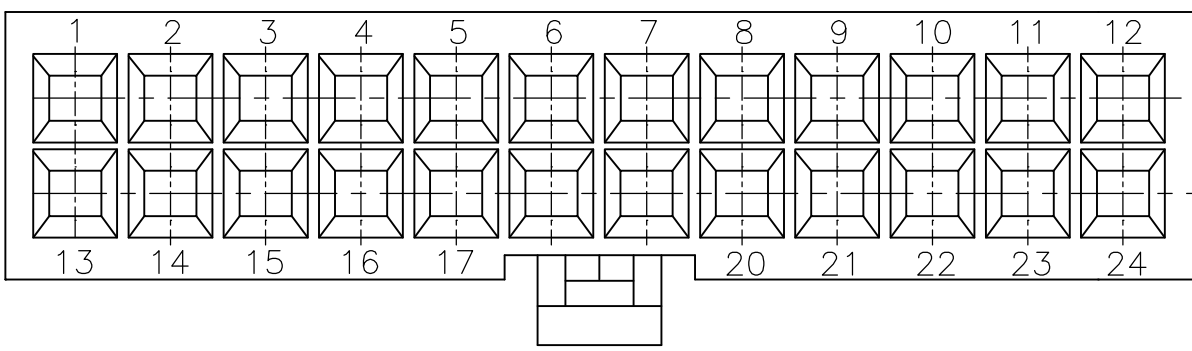


C

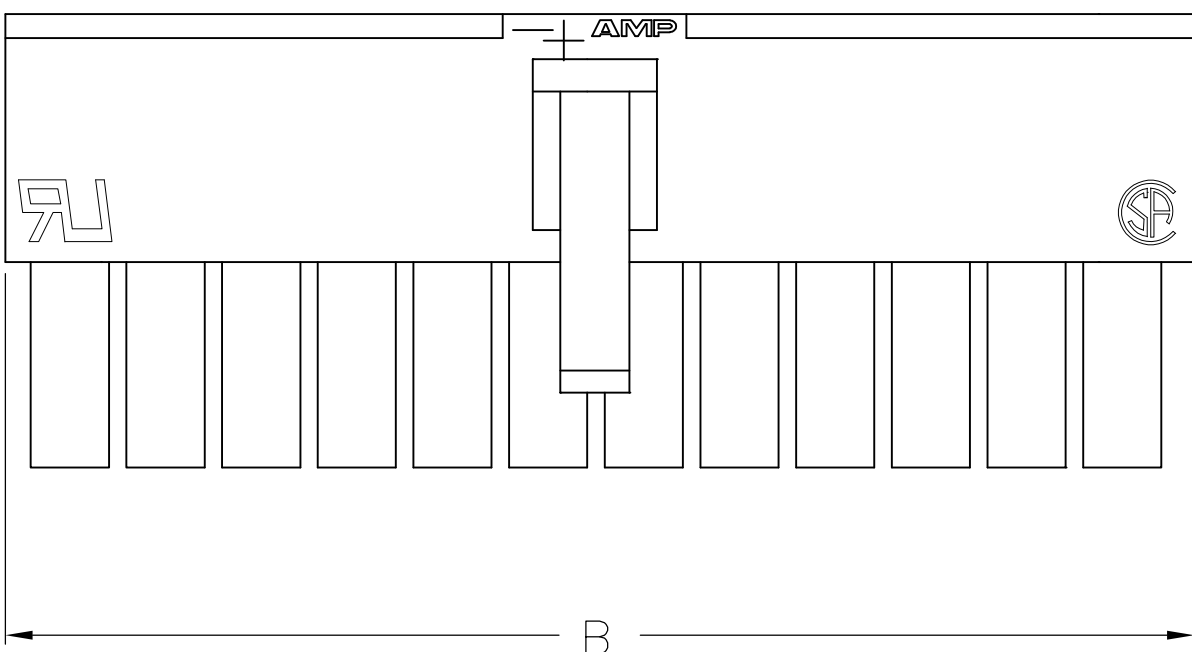



B

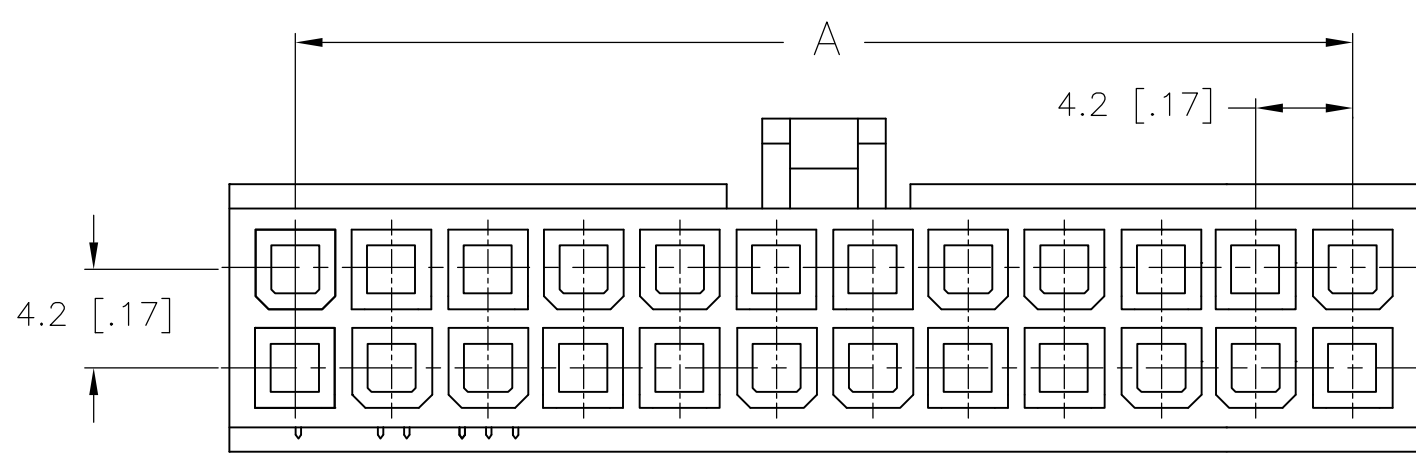

A

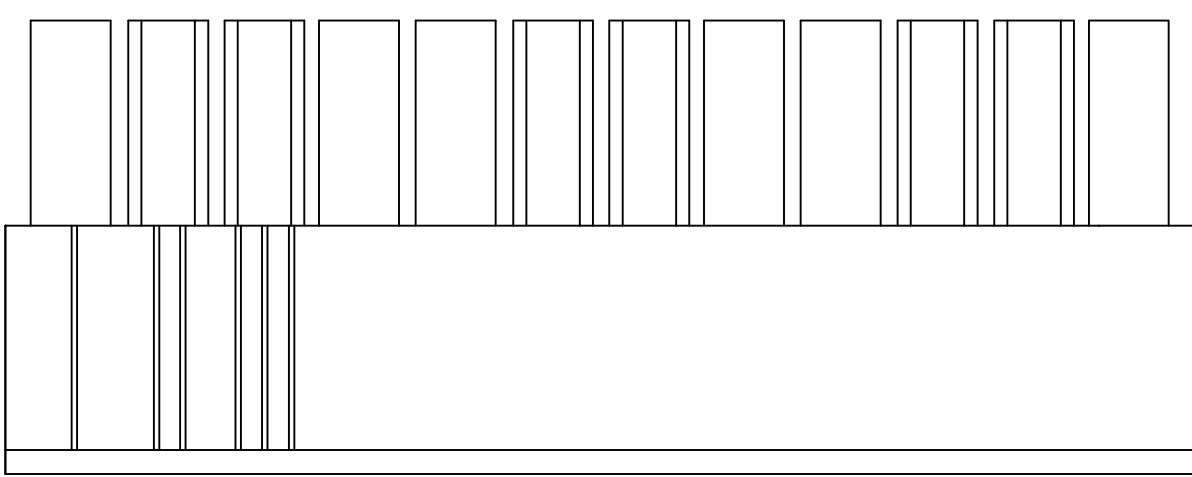

- 1 MATERIAL: POLYAMIDE, UL94V-2, WHITE.
- 2 MATERIAL: POLYAMIDE, UL94-V0, PINK.
- 3 MATERIAL: POLYAMIDE, UL94-V0, BLUE.
- 4 GLOW WIRE FLAMMABILITY INDEX (GWFI) 850°C AT LEAST, ACC. TO IEC 60335-1
- 5 GLOW WIRE IGNITION TEMPERATURE (GWIT) 775°C AT LEAST, ACC. TO IEC 60335-1
- 6 GLOW WIRE END PRODUCT TEMPERATURE (GWEPT) 750°C NO FLAME ACC. TO IEC 60335-1

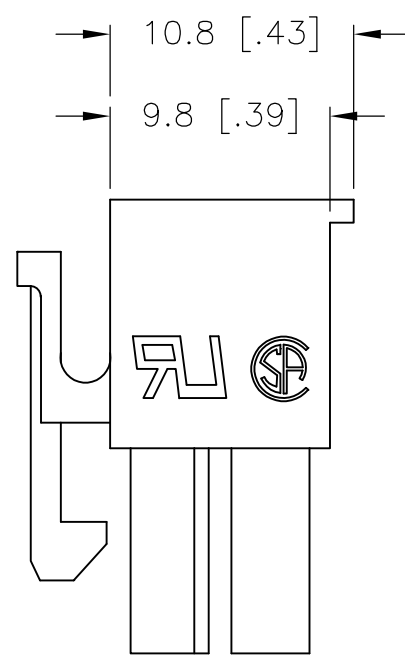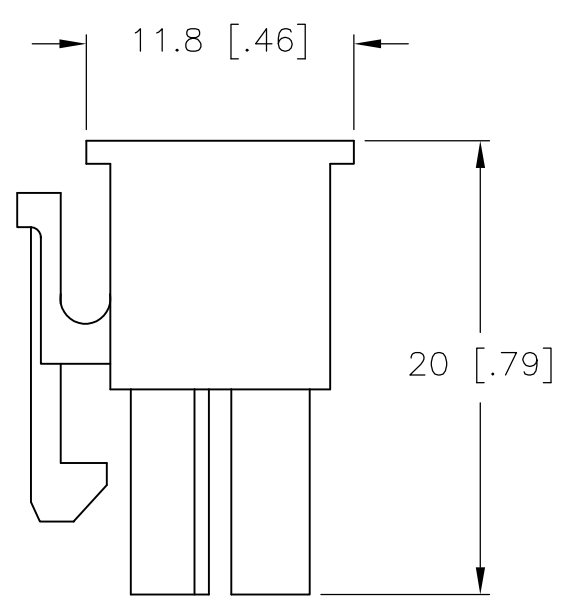

ONLY FOR 1586765-2

3	43.2	37.8	20	2-2292405-0
2	39.0	33.6	18	1-2292404-8
1	51.6	46.2	24	2-1586765-4
1	47.4	42.0	22	2-1586765-2
1	43.2	37.8	20	2-1586765-0
1	39.0	33.6	18	1-1586765-8
1	34.8	29.4	16	1-1586765-6
1	30.6	25.2	14	1-1586765-4
1	26.4	21.0	12	1-1586765-2
1	22.2	16.8	10	1-1586765-0
1	18.0	12.6	8	1586765-8
1	13.8	8.4	6	1586765-6
1	9.6	4.2	4	1586765-4
1	5.4	-	2	1586765-2
NOTES	DIM B	DIM A	POS.	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±
1 PLC ± 0.4[.02]
2 PLC ± 0.25[.010]
3 PLC ± 0.150[.0059]
4 PLC ±
ANGLES ±
FINISH -

MATERIAL
SEE TABLE

-

DWN
K. WHITAKER
CHK
C. CASH
APVD
C. CASH
PRODUCT SPEC

08MAY2007
08MAY2007
08MAY2007

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

TE Connectivity

NAME
RECEPTACLE HOUSING,
4.2 MM P.E. SERIES

SIZE
A2

CAGE CODE
00779

DRAWING NO
C=1586765

RESTRICTED TO
-

SCALE
3:1

SHEET
1 of 1

REV
E1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1586765-6](#)