


LOC	DIST	REVISIONS					
E	B	P	LTR	DESCRIPTION	DATE	DWN	APVD
		BA1		REVISED PER ECO-11-005150	28MAR2011	RK	HMR

RELEASED FOR PUBLICATION 2008

ALL RIGHTS RESERVED.

THIS DRAWING IS UNPUBLISHED.


© COPYRIGHT 2008 BY -

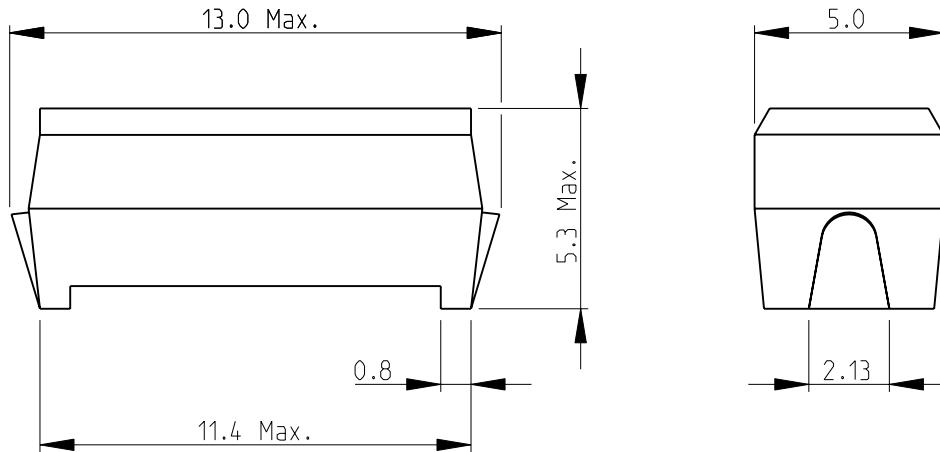


1 PACKAGING: SUPPLIED TAPEDED AND REELED ON 13" REELS IN QUANTITIES OF 1500 PIECES


2 FOR FURTHER INFORMATION SEE DATA SHEET FOR 3615 SERIES-HIGH CURRENT INDUCTOR SMD

## RECOMMENDED LAND PATTERN

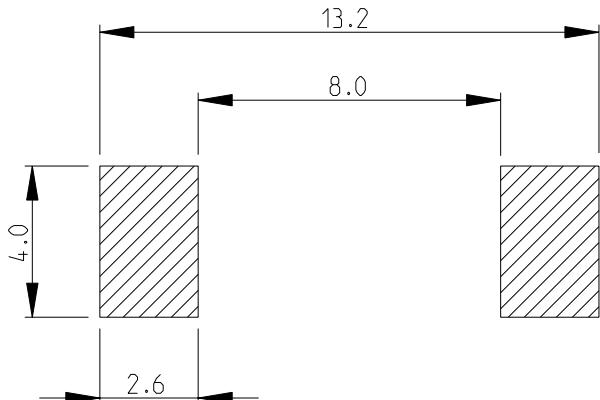

RoHS Compliant

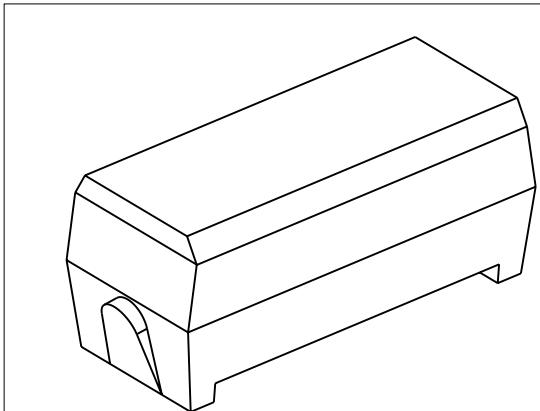

DIMENSIONS:		DWN SUBHASH.M	13-NOV-08	MATERIAL	FINISH
mm		CHK PRAKASH.S	13-NOV-08	 TE Connectivity	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD STEPHEN.P	13-NOV-08		
0 PLC $\pm 0.2$		PRODUCT SPEC		NAME HIGH CURRENT INDUCTOR SMD	
1 PLC $\pm 0.1$		-		SERIES 3615	
2 PLC $\pm -$		APPLICATION SPEC		SIZE A 4	
3 PLC $\pm -$		-		CAGE CODE 00779	
4 PLC $\pm -$		WEIGHT 0.7g max.		DRAWING NO C-1624097	
ANGLES $\pm 5^\circ$		CUSTOMER DRAWING		RESTRICTED TO -	
					

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3615A2R2K](#)