




- 7. PART MODIFICATION: RECEPTACLE IS RATE AT 150°C (COLOR: BLACK).
- 6. MATERIAL HOUSING/RETAINER: PLASTIC; GROMMET: RUBBER.
- 5. CONNECTOR DESIGNED TO BE USED WITH DTM06-12S\*-\*\*\*\* PLUGS. (\*) = A,B,C,D KEYS, (\*\*\*\*) = ALL HIGH TEMPERATURE MODIFICATIONS. CONSULT FACTORY FOR MODIFICATIONS.
- FOR CONTACT AND WIRE PERFORMANCE AND APPLICATION CHARACTERISTICS SEE ENVELOPE DRAWING 0425-015-0000.
- 3. SECONDARY WEDGE LOCK SOLD SEPARATELY: WM-12P.
- 2. DIMENSION TOLERANCE: ±.025 [.64].
- I. DIMENSIONS ARE IN INCHES [mm].


NOTES: UNLESS OTHERWISE SPECIFIED

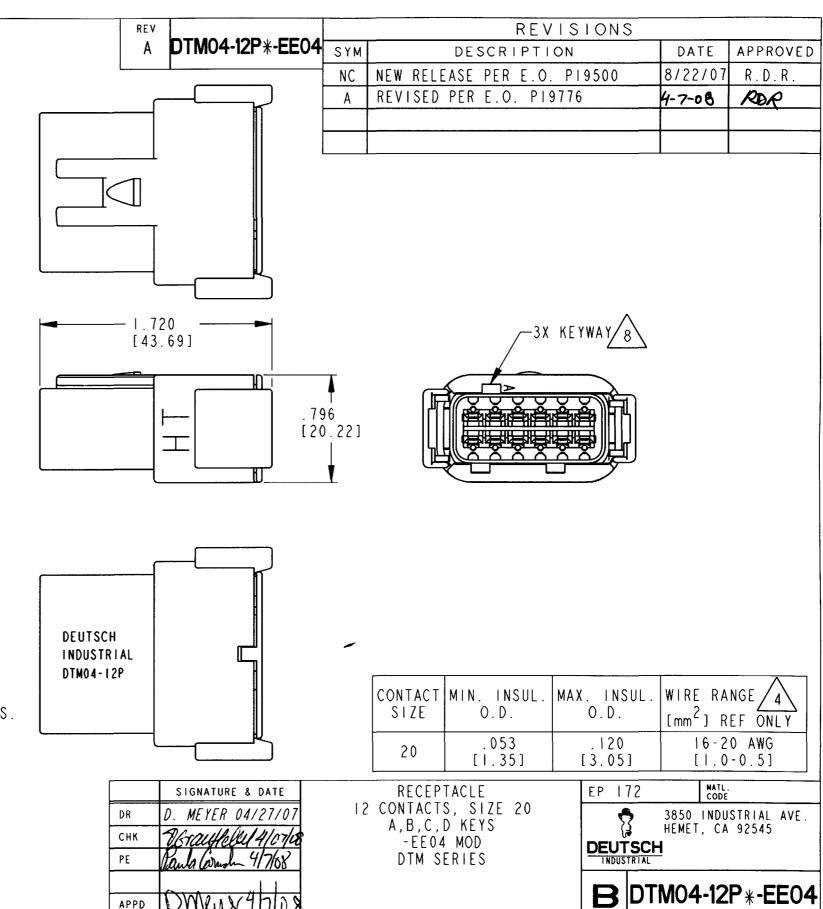

ENVELOPE

SCALE NONE TOT -

CODE SHEET | OF 2

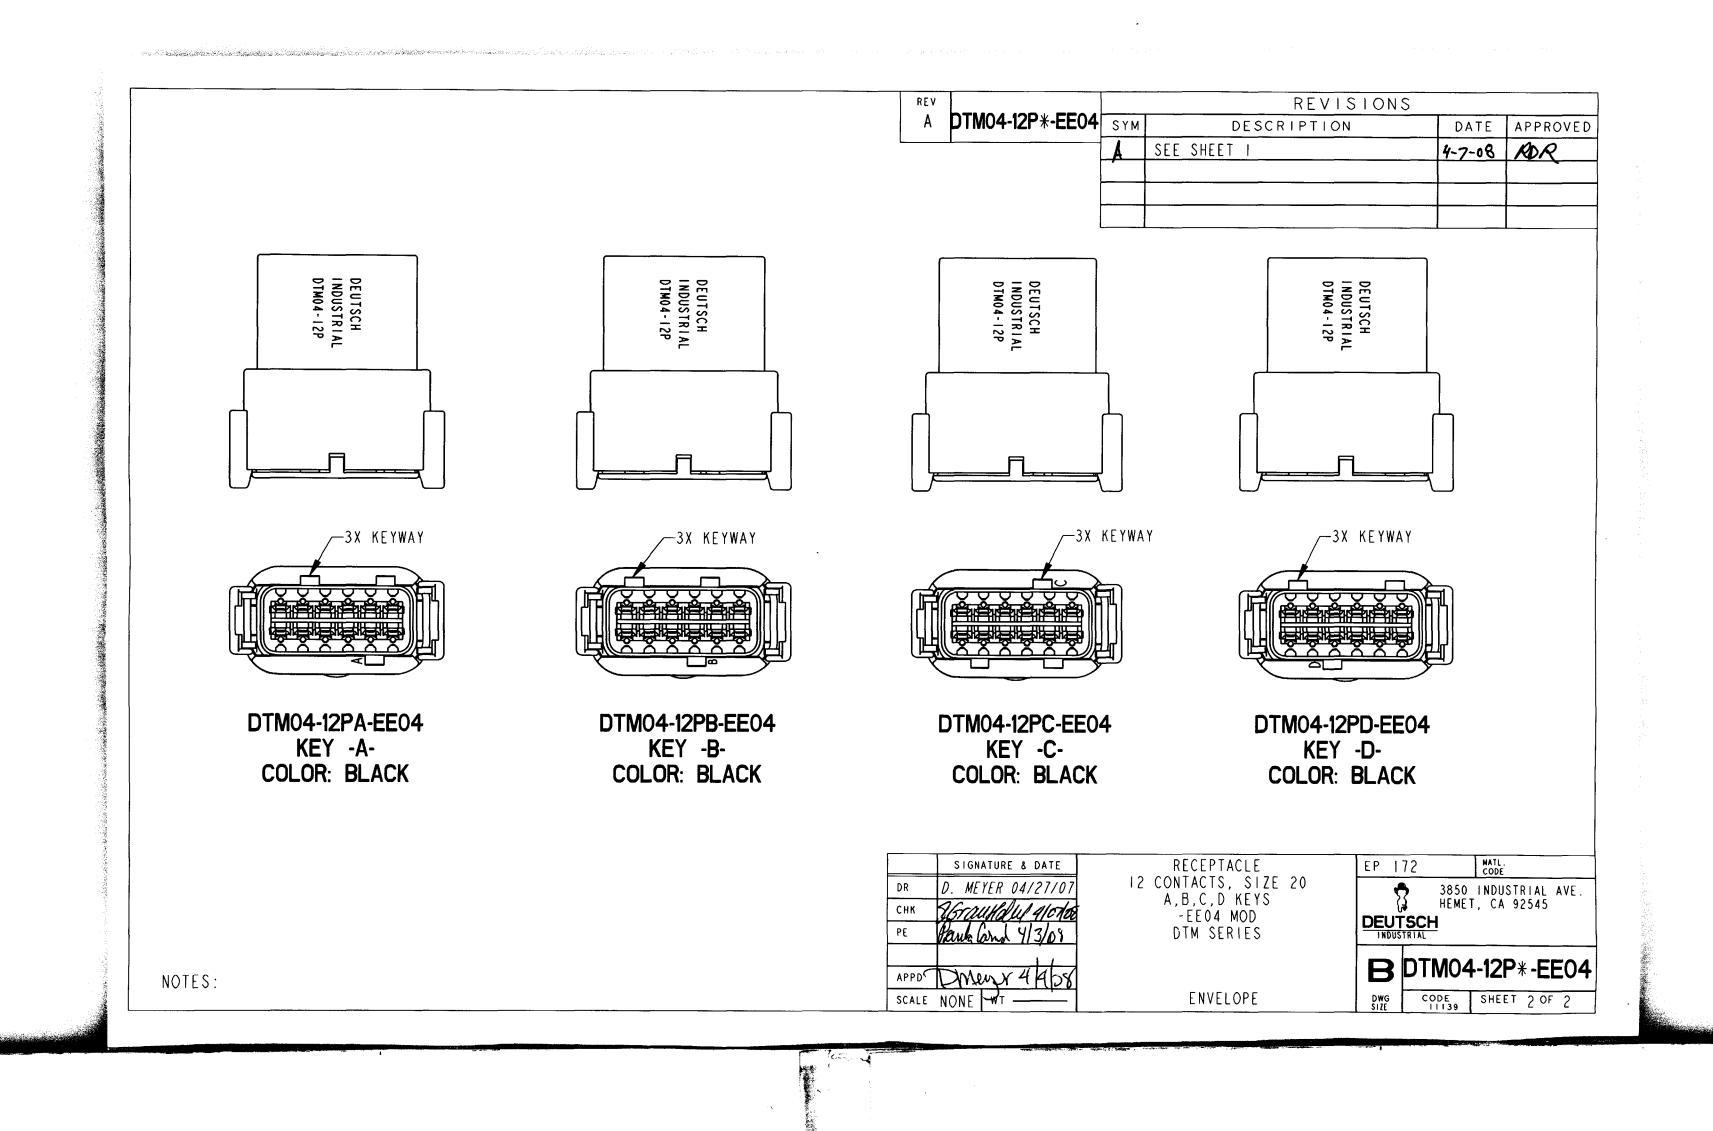

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

DTM04-12PA-EE04