

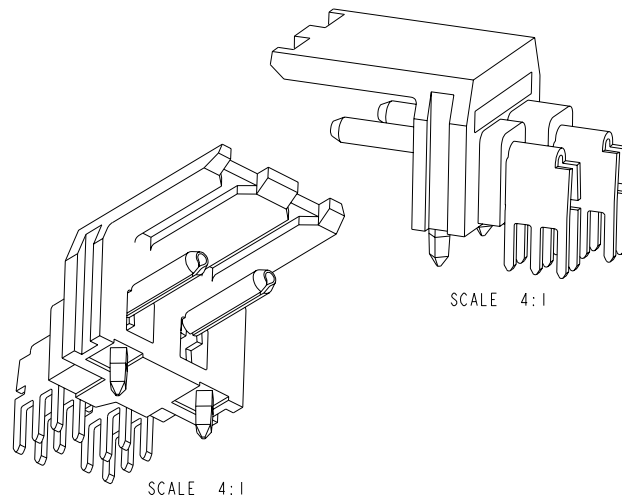


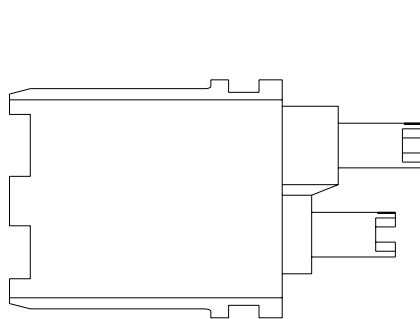

PCB LAYOUT
(CONNECTOR SIDE VIEW)
SCALE 4:1



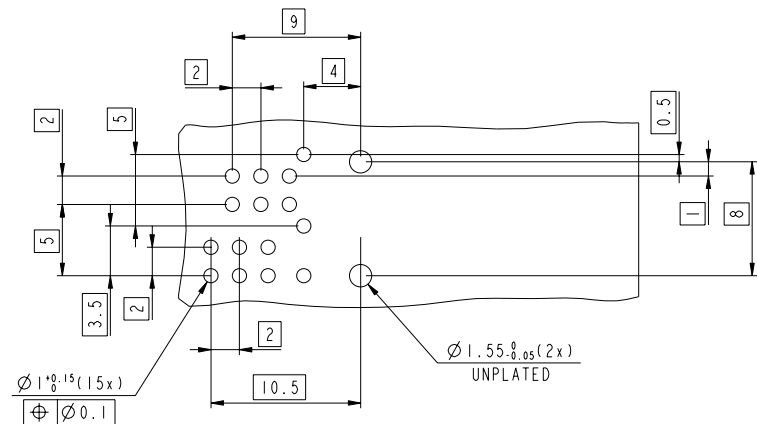


NOTA:

1. BODY MATERIAL: LIQUID CRYSTAL POLYMER 30% GLASS
FLAME RETARDENT ACC. UL 94 V0
2. TERMINAL MATERIAL: BRONZE PLATING
Ni + GOLD ON MATING AREA
Ni + SnPb ON TERMINATION
3. PACKAGING SPECIFICATION EUR-14-005
4. PRODUCT SPECIFICATION GS-12-308.
5. VOLTAGE PROOF 1000 V
6. CURRENT CAPACITY 10 A MAXI
7. CONTACT RESISTANCE 10 mOHM MAXI
8. INSULATION RESISTANCE 5000 MOHM INITIAL MINI

9-ROHS INFORMATION:

-THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER
COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
-THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C
PEAK TEMPERATURE FOR 10 SECOND IN A WAVE
SOLDER APPLICATION WITH A 1.6MM MINIMUM THICK
CIRCUIT BOARD. SEE APPLICATION NOTES/PROCEDURES IF
THEY ARE AVAILABLE. PACKAGING SPEC: GS-14-920.

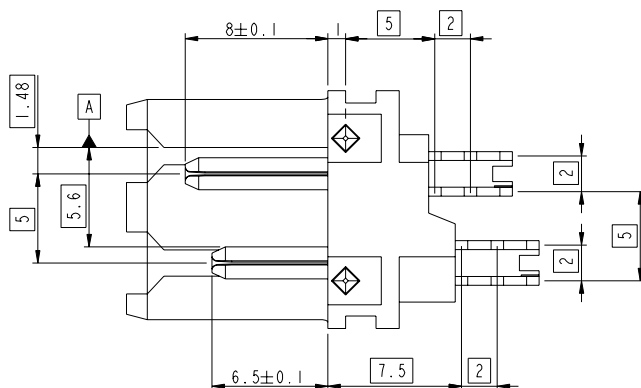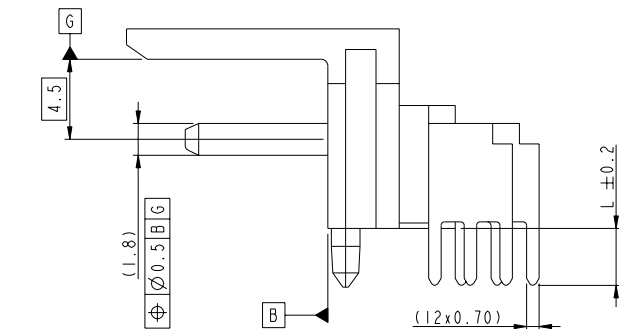

Product Number	L
72841-202LF	2.2
72841-203LF	2.7

www.fciconnect.com				surface	tolerance std	projection	MM	
				ISO 1302	ISO 406	ISO 1101		
				TOLERANCES UNLESS OTHERWISE SPECIFIED				
Dr	LENOIR			ANGULAR	LINEAR	0.X	±0.3	size
Eng	LENOIR	2004/08/18		0°	±2°	0.XX	±0.1	A2
Chr	LEGARE	2004/08/18				0.XXX	±0.05	ECN
Appr	LEGARE	2004/08/18		Product family				NII-0071
				SOFIX				Spec ref
Rev	ECN no	dr	date	Title				RELEASE
A	-	MLE	2004-08-18	RA HDR POWER ASSY				
B	LS05-0080	JTA	2005-11-29					
C	L06-0084	LGO	2006-07-01					
D	LS06-0143	LGO	2006-09-25					
E	NII-0071	A.ZH	2011-03-24					
				FCI				
				catalog no				
				See Table				
				CUSTOMER COPY				
				sheet 1 of 1				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[72841-202LF](#) [72841-203LF](#)