

DETAIL B -90° ROTATED
(OPTIONAL DESIGN
BERG TAIWAN ONLY)


mat'l. code		surface ISO1302 ✓		tolerance ISO1101 ISO406		projection mm		product family MOD JACK	
l trechn nodr		date		tolerances unless otherwise specified		scale 2.0		title	
S	S90142 JSR	10/4/99	angle	0.X±0.3				6 POS VERTICAL PC.B. MOD JACK ASSY	
T	N06-0134 LONG	5/19/06	0°±2'	0.XX±0.15				sheet 1 of 2	
U	N08-0239 SH MNO	11/10/08		0.XXX±0.05				size A4	
V	N09-0092 SH MNO	5/25/09	dir	CATHY LIN	10/21/97			dwg no 69254	
W	ELX-N-010680 SH MNO	3/14/12	enr	TONY CHIEN	10/21/97			type Product Customer Drawing	
			chr	TONY CHIEN	10/21/97				
			appd	JENN TSAO	10/21/97				
sheet index	revision sheet	W	W						
		1	2						

PRODUCT NO.	POSITIONS LOADED	CONTACT PLATING	HOUSING COLOR	DIM. A	NOTES
69254-001/001LF	ALL	5u" Au + high performance lubricant	BLACK	3.18	-
-002/002LF	2,3,4,5	5u" Au + high performance lubricant	BLACK		-
-003/003LF	3,4	5u" Au + high performance lubricant	BLACK		-
-004/004LF	2,3,4,5	5u" Au + high performance lubricant	BLACK		-
-005/005LF	3,4	50u" /1,27u GXT	BLACK		-
-006/006LF	3,4	5u" Au + high performance lubricant	BLACK		-
-007/007LF	ALL	50u" /1,27u GXT	BLACK		-
-008/008LF	ALL	5u" Au + high performance lubricant	BLACK		-
-009	ALL	5u" Au + high performance lubricant	BLACK		NOTE 1
-010	2,3,4,5	50u" /1,27u GXT	BLACK		-
-011	ALL	5u" Au + high performance lubricant	GREY		-
-012	2,3,4,5	15u" GXT	BLACK		-
-001A	ALL	5u" Au + high performance lubricant	BLACK	NOTE 3	
-001L	ALL	5u" Au + high performance lubricant	BLACK	3.94	-
-002L	2,3,4,5	5u" Au + high performance lubricant	BLACK		-
-013	3,4	6u" /0.15um GXT	BLACK		3.18
-014	2,3,4,5	2u" /0.05um GXT	BLACK	3.18	-
69254-001HLF	ALL	5u" Au + high performance lubricant	BLACK	3.18	-
-002HLF	2,3,4,5	5u" Au + high performance lubricant	BLACK		-
-003HLF	3,4	5u" Au + high performance lubricant	BLACK		-
-004HLF	2,3,4,5	5u" Au + high performance lubricant	BLACK		-
-005HLF	3,4	50u" /1,27u GXT	BLACK		-
-006HLF	3,4	5u" Au + high performance lubricant	BLACK		-
-007HLF	ALL	50u" /1,27u GXT	BLACK		-
-008HLF	ALL	5u" Au + high performance lubricant	BLACK		-

H: MEETS PIP PROCESS PRODUCT NO.

NOTE :

- ① SPECIAL PACKAGING.
- 2 ALL THE SPECS OF 69254-001A ARE SAME AS 69254-001 EXCEPT THE HSG HAS NO ANY "OPTIONAL DIMS".
- ③ THIS PIN NUMBERING IS OPPOSITE TO FCC, PART 68, SUBPART F REQUIRMENTS.
- 4 ADD "LF" SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION.
- 5 IF "LF" P/N THE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
- 6 THE HOUSING WILL WITHSTAND EXPOSURE TO 260° PEAK TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER PROCESS.
- ⑦ PLATING OPTIONS:
MAY BE EITHER GOLD OR GXT PLATED AT MANUFACTURER'S OPTION.

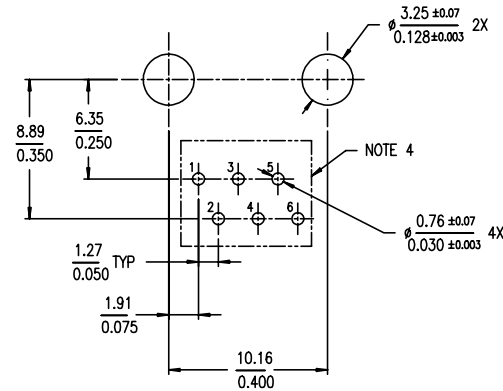

BOARD LAYOUT
VIEWED FROM TOP

mat'l. code		surface <input checked="" type="checkbox"/> ISD1302		tolerance <input checked="" type="checkbox"/> ISO1101 <input checked="" type="checkbox"/> ISO406		projection		product family MOD JACK	
l trechn nodr		date		tolerances unless otherwise specified		mm		title	
S	SP0142 JSR	10/4/99		angle		mm		6 POS VERTICAL	
T	N06-0134 LONG	5/19/06		0°±2'		scale 2.0		PC.B. MOD JACK ASSY	
U	N08-0239 SH MNO	11/10/08		dir		CATHY LIN		10/21/97	
V	N09-0092 SH MNO	5/25/09		engr		TONY CHIEN		10/21/97	
W	ELX-N-010680 SH MNO	3/14/12		chr		TONY CHIEN		10/21/97	
				appd		JENN TSAO		10/21/97	
sheet		revision						dwg no	
index		sheet						sheet 2 of 2	
								size A4	
								type Product Customer Drawing	



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[69254-004](#) [69254-001LF](#) [69254-002LF](#) [69254-003](#) [69254-006](#) [69254-008](#) [69254-001](#) [69254-003LF](#) [69254-006LF](#)
[69254-009](#) [69254-002](#)