

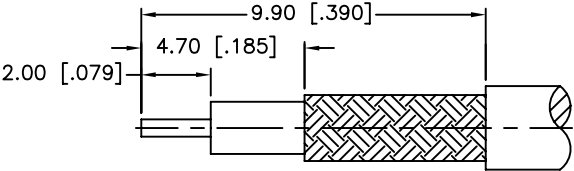
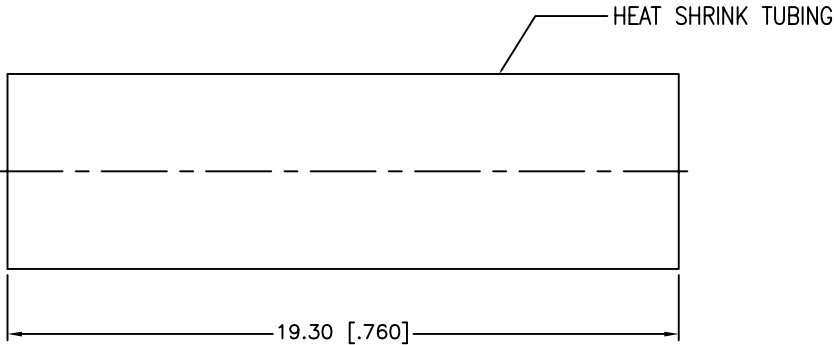
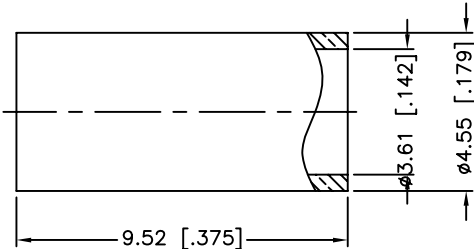


REV.	DATE	ECR NO.	DESCRIPTION
NC	12/17/09	XXXXXX	INITIAL RELEASE

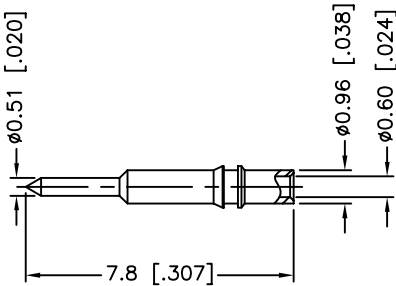

RECOMMENDED
CABLE STRIPPING DIM'S

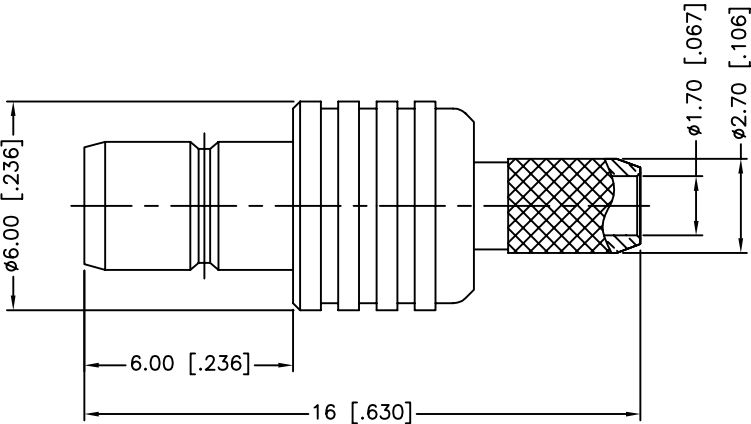

1. CRIMPED FERRULE
HEX CRIMP SIZE .151"
2. CRIMPED CONTACT PIN
SQ. CRIMP SIZE 0.7mm

9				1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	APPROVALS	DATE	Amphenol Connex					
8				1		DRAWN	C.WANG					12/17/09	
7	HEAT SHRINK TUBING		BLACK	1		CHECKED			PART DESCRIPTION SMB CRIMP JACK (FOR RG-316U/D)				
6	FERRULE	COPPER	NICKEL	1		ISSUED							
5	CONTACT PIN	BRASS	GOLD	1	SHEET	1 OF 1		PART NO. 142182					
4	BARREL	BRASS	NICKEL	1									
3	INSULATOR	PTFE	NATURAL	1	CAD FILE C:/CONNEX/142182.DWG				DWG. NO. 142182.DWG		REV. NC	SIZE A	SCALE NA
2	INSULATOR	PTFE	NATURAL	1									
1	BODY	BRASS	NICKEL	1									
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING								

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[142182](#)