

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

- , -

© COPYRIGHT - By -

ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	P2	PN 6-1437654-7 REACTIVATED	13APR2018	RK	PS

MATERIALS:

HOUSING: POLYAMIDE, BLACK, UL94V-0.

TERMINALS: COPPER ALLOY, TIN PLATE.

SCREWS: ZINC PLATED, STEEL WITH CLEAR CHROMATE.

BUSH: POLYAMIDE, BLACK.

ELECTRICAL:

RATING: 25A, 300V.


WIRE RANGE: 12-22 AWG.

MECHANICAL:

MAXIMUM TORQUE RATING: 7 IN-LBS.



OBSOLETE PARTS: OBSOLETE CIS STREAMLINING
PER D.RENAUD/D.SINISI

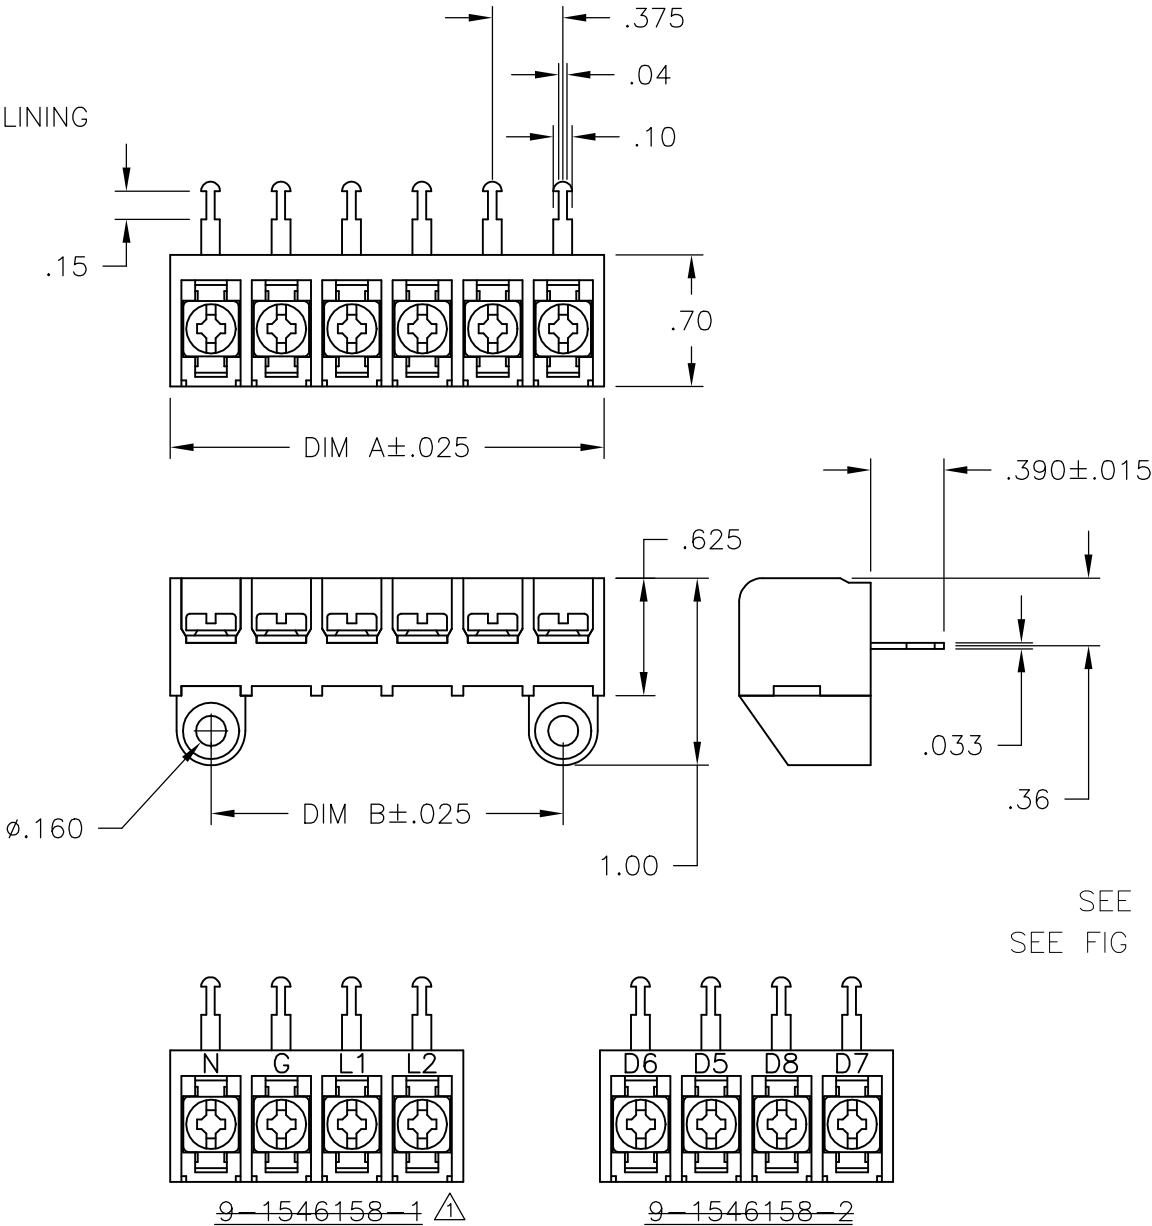

OBSOLETE

OBSOLETE

OBSOLETE

OBSOLETE

DIM. "B"	DIM. "A"	NO. OF POS.	CATALOG NUMBER	PART NO.
-------------	-------------	-------------------	-------------------	----------

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN S SCHLEGEL 8/5/05

CHK S YODER 8/5/05

APVD S YODER 8/5/05


PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

DIMENSIONS:
INCHES



MATERIAL

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± .02
3 PLC ± .010
4 PLC ± -
ANGLES ± 1°

FINISH



TE Connectivity

NAME

6STR-XX-006

SIZE CAGE CODE DRAWING NO RESTRICTED TO

A3 00779 C-5-1437654-3

SCALE NTS SHEET 1 of 1 REV P2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1546174-9](#)