

Molded Parts Specification Control Drawing

Part Number : 234A611 thru 671
Description : Boot, Rectangular
Subminiature, 90°
End Entry, Overexpanded

NOTES

- All dimensions are in $\frac{\text{inches}}{[\text{millimeters}]}$; $\frac{\text{lbs}}{[\text{gms}]}$
- Dimensions appearing in table are as follows:
 - a - As Supplied
 - b - After Unrestricted Recovery
- Coating is optional. As supplied dimensions appearing in table are for uncoated parts. When coating is added, entry diameters will be reduced by .06 max.
- Molding parts are optional. When -00 modification number is specified molding parts will be located as shown.
- Weight shown in table of dimensions is based on polyolefin part.

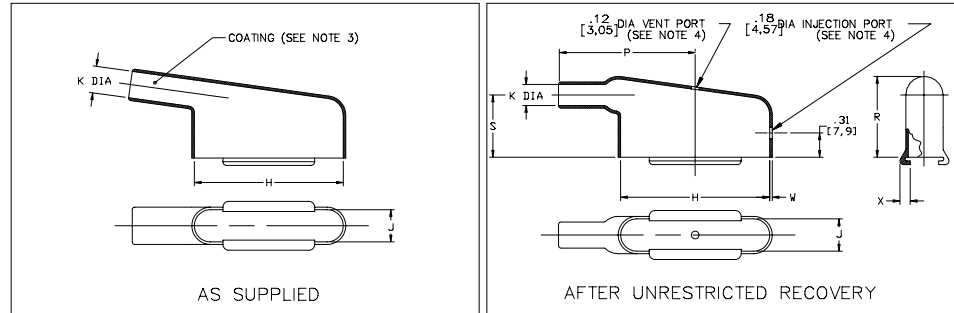


TABLE OF DIMENSIONS

PART NUMBER	H		J		K		P	R	S	W	X	Weight Nom b	This Boot Fits Canon-Cinch
	Min a	±5% b	Min a	±5% b	Min a	Max b							
234A611	.63 [16,0]	.80 [20,3]	.63 [16,0]	.42 [10,7]	.63 [16,0]	.16 [4,1]	1.02 [25,9]	.85 [21,6]	.60 [15,2]	.04 [1,02]	.12 [3,05]	.0048 [2,18]	DE-9
234A621	.75 [19,1]	1.11 [28,2]	.75 [19,1]	.42 [10,7]	.75 [19,1]	.21 [5,3]	1.21 [30,7]	.97 [24,6]	.73 [18,5]	.04 [1,02]	.12 [3,05]	.0059 [2,68]	DA-15
234A632	1.15 [29,2]	1.66 [42,2]	1.15 [29,2]	.42 [10,7]	1.15 [29,2]	.29 [7,4]	1.69 [42,9]	1.10 [27,9]	.87 [22,1]	.04 [1,02]	.12 [3,05]	.0102 [4,63]	DB-25
234A642	1.35 [34,3]	2.31 [58,7]	1.35 [34,3]	.42 [10,7]	1.35 [34,3]	.34 [8,6]	2.10 [53,3]	1.20 [30,5]	1.00 [25,4]	.04 [1,02]	.12 [3,05]	.0132 [5,99]	DC-37
234A652	1.48 [37,6]	2.28 [57,9]	1.48 [37,6]	.54 [13,7]	1.48 [37,6]	.42 [10,7]	2.20 [55,9]	1.27 [32,3]	1.00 [25,4]	.04 [1,02]	.12 [3,05]	.0152 [6,90]	DD-50
234A661	.63 [16,0]	.80 [20,3]	.63 [16,0]	.42 [10,7]	.63 [16,0]	.15 [3,8]	1.02 [25,9]	.73 [18,5]	.48 [12,2]	.04 [1,02]	.12 [3,05]	.0045 [2,04]	DE-9
234A671	.75 [19,1]	1.11 [28,2]	.75 [19,1]	.42 [10,7]	.75 [19,1]	.20 [5,1]	1.21 [30,7]	.78 [19,8]	.53 [13,5]	.04 [1,02]	.12 [3,05]	.0056 [2,54]	DA-15



TYCO ELECTRONICS
307 CONSTITUTION DRIVE
MENLO PARK, CALIFORNIA 94025

Revision : J
Date : 10/04/01


Part Number : 234A611 thru 671
Description : Boot, Rectangular
Subminiature, 90°
End Entry, Overexpanded

Molded Parts Specification Control Drawing

Part Number : 234A611 thru 671
Description : Boot, Rectangular
Subminiature, 90°
End Entry, Overexpanded

MATERIAL DASH NO.	MATERIAL DESCRIPTION	RT SPEC	COATING SLASH NO.	COATING S NO.	COATING DESCRIPTION
-3	Polyolefin, Semi-rigid	RT-301	/42;/86	S-1017;S-1048	Adhesive
-4	Polyolefin, Flexible	RT-1304	/42;/86	S-1017;S-1048	Adhesive
-8	Polyolefin, Space	RT-1308	N/A		
-25	Elastomer, Fluid Resistant	RT-1325	/86	S-1048	Adhesive
-100	Polyolefin, Semi-flexible ZEROHAL™	RT-1323	/86	S-1048	Adhesive

ORDERING INFORMATION

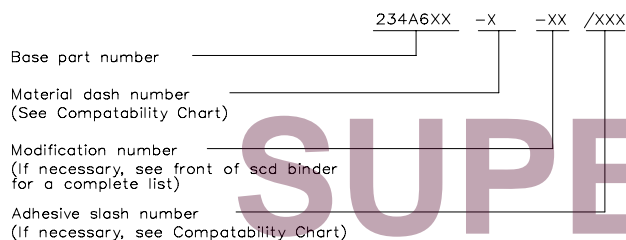

THIS DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE; CONSULT YOUR NEAREST FIELD REPRESENTATIVE FOR CURRENT REVISION



TYCO ELECTRONICS
307 CONSTITUTION DRIVE
MENLO PARK, CALIFORNIA 94025

Revision : J
Date : 10/04/01

Part Number : 234A611 thru 671
Description : Boot, Rectangular
Subminiature, 90°
End Entry, Overexpanded
CAD FILE MP01085

SUPERSEDED
NOT the LATEST
REVISION

If this document is printed it becomes uncontrolled.
Check with the web for latest revision.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

[234A671-4-0](#) [234A652-3-0](#) [234A621-4/42-0](#) [234A632-4/42-0](#) [234A652-4/42-0](#) [234A611-3/86-0](#) [234A642-3-0](#)
[234A621-3/42-0](#) [234A642-3-03/42-0](#) [234A632-3-0](#) [234A632-3/42-0](#) [CL6074-000](#) [234A632-100/86-0](#) [234A652-8-0](#)
[234A611-4/86-0](#) [234A611-3-03/42-0](#) [234A621-100/86-0](#) [234A652-3-03/42-0](#) [234A611-3-0](#) [234A632-4-03/42-0](#)
[234A611-4-03/42-0](#) [234A632-3/86-0](#) [234A642-25-0](#) [234A632-25-0](#) [234A621-25-0](#) [234A671-8-0](#) [234A652-3/86-0](#)
[234A632-3-03/42-0](#) [234A611-100/86-0](#) [234A611-25-0](#) [234A652-100/86-0](#) [234A642-4/42-0](#)