

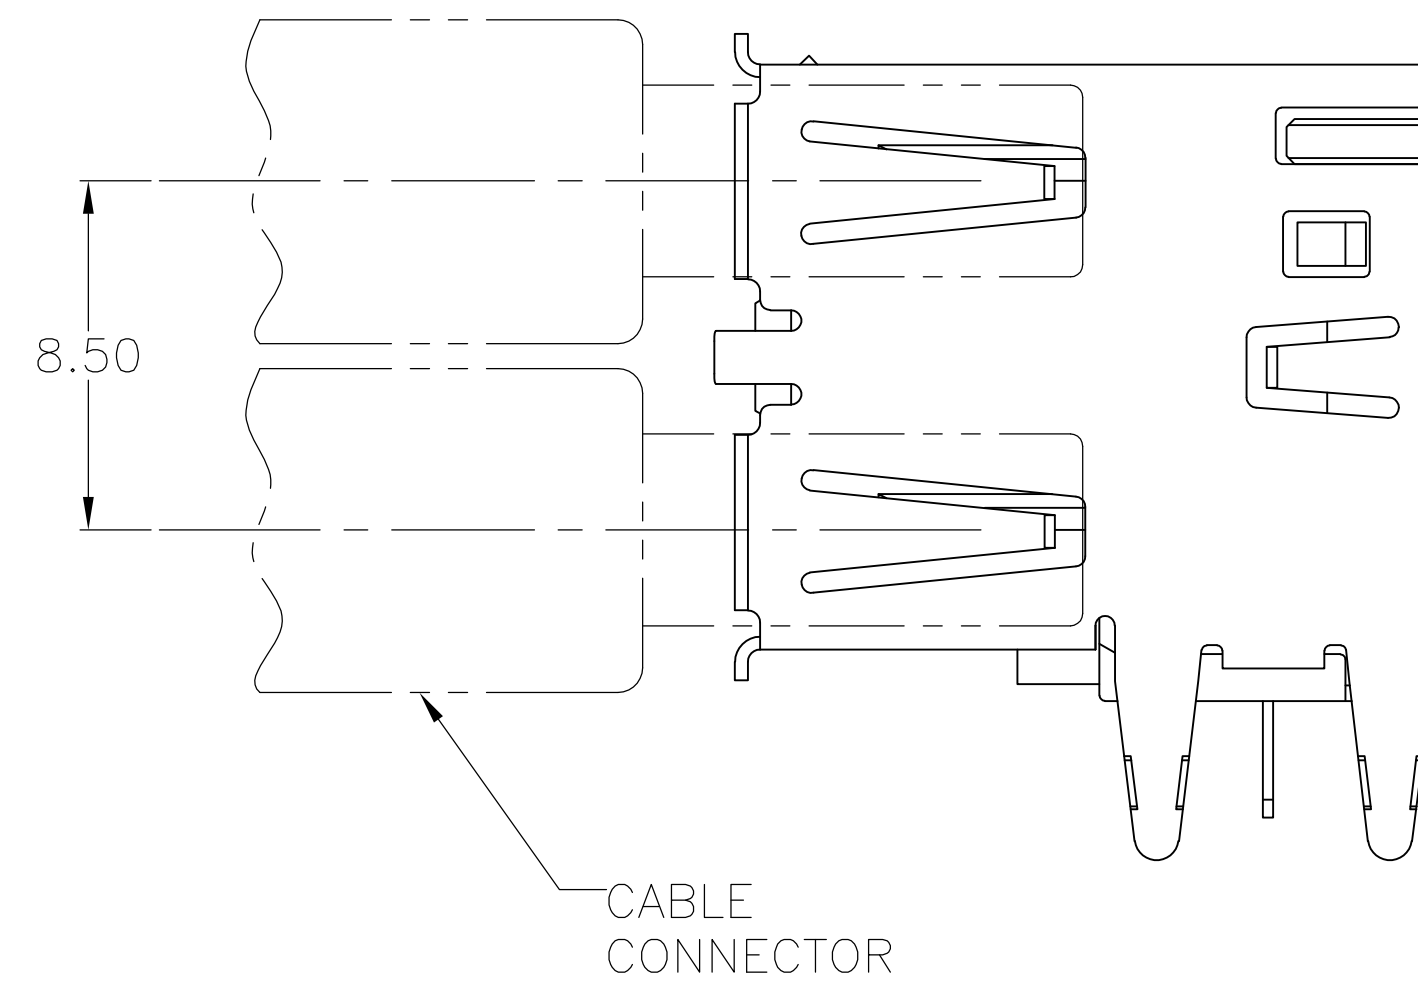
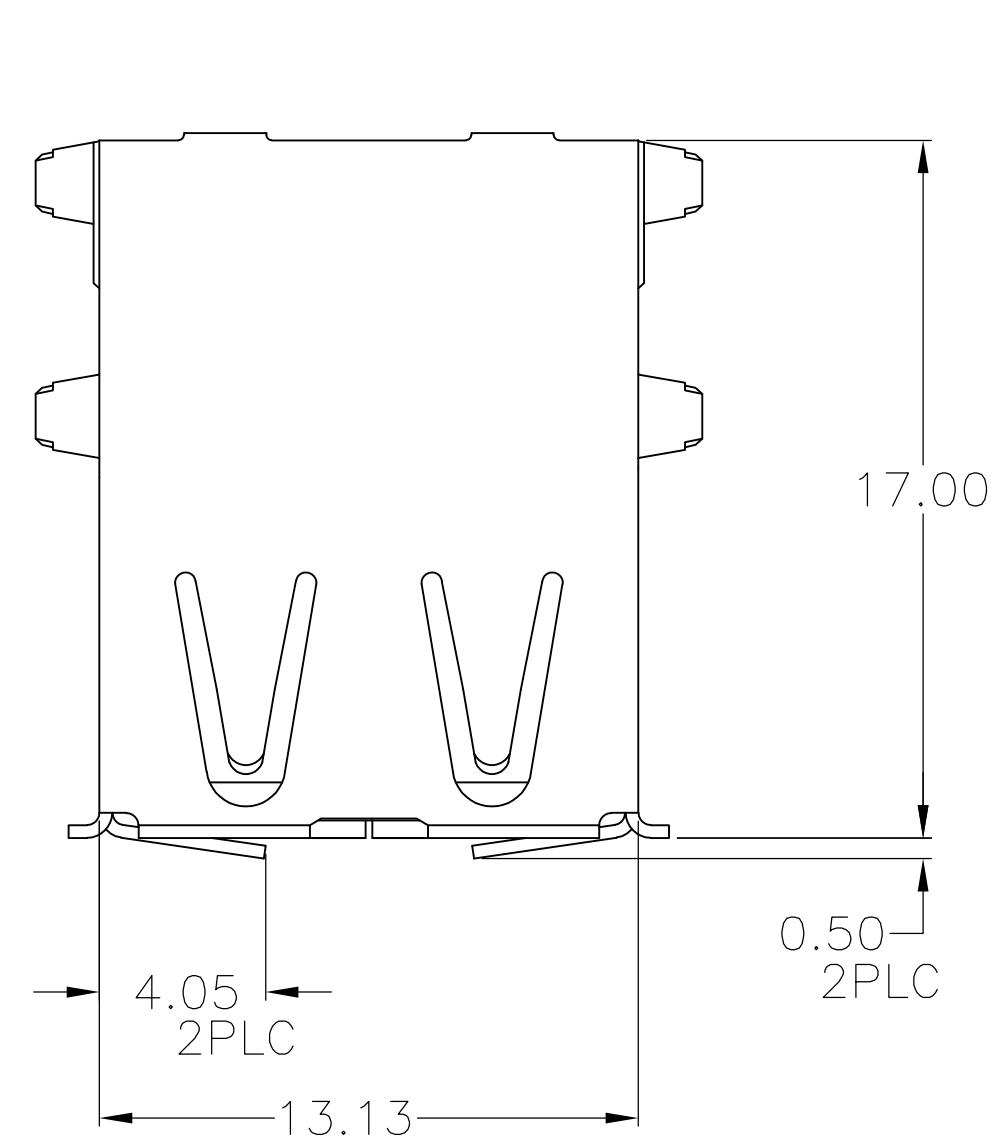
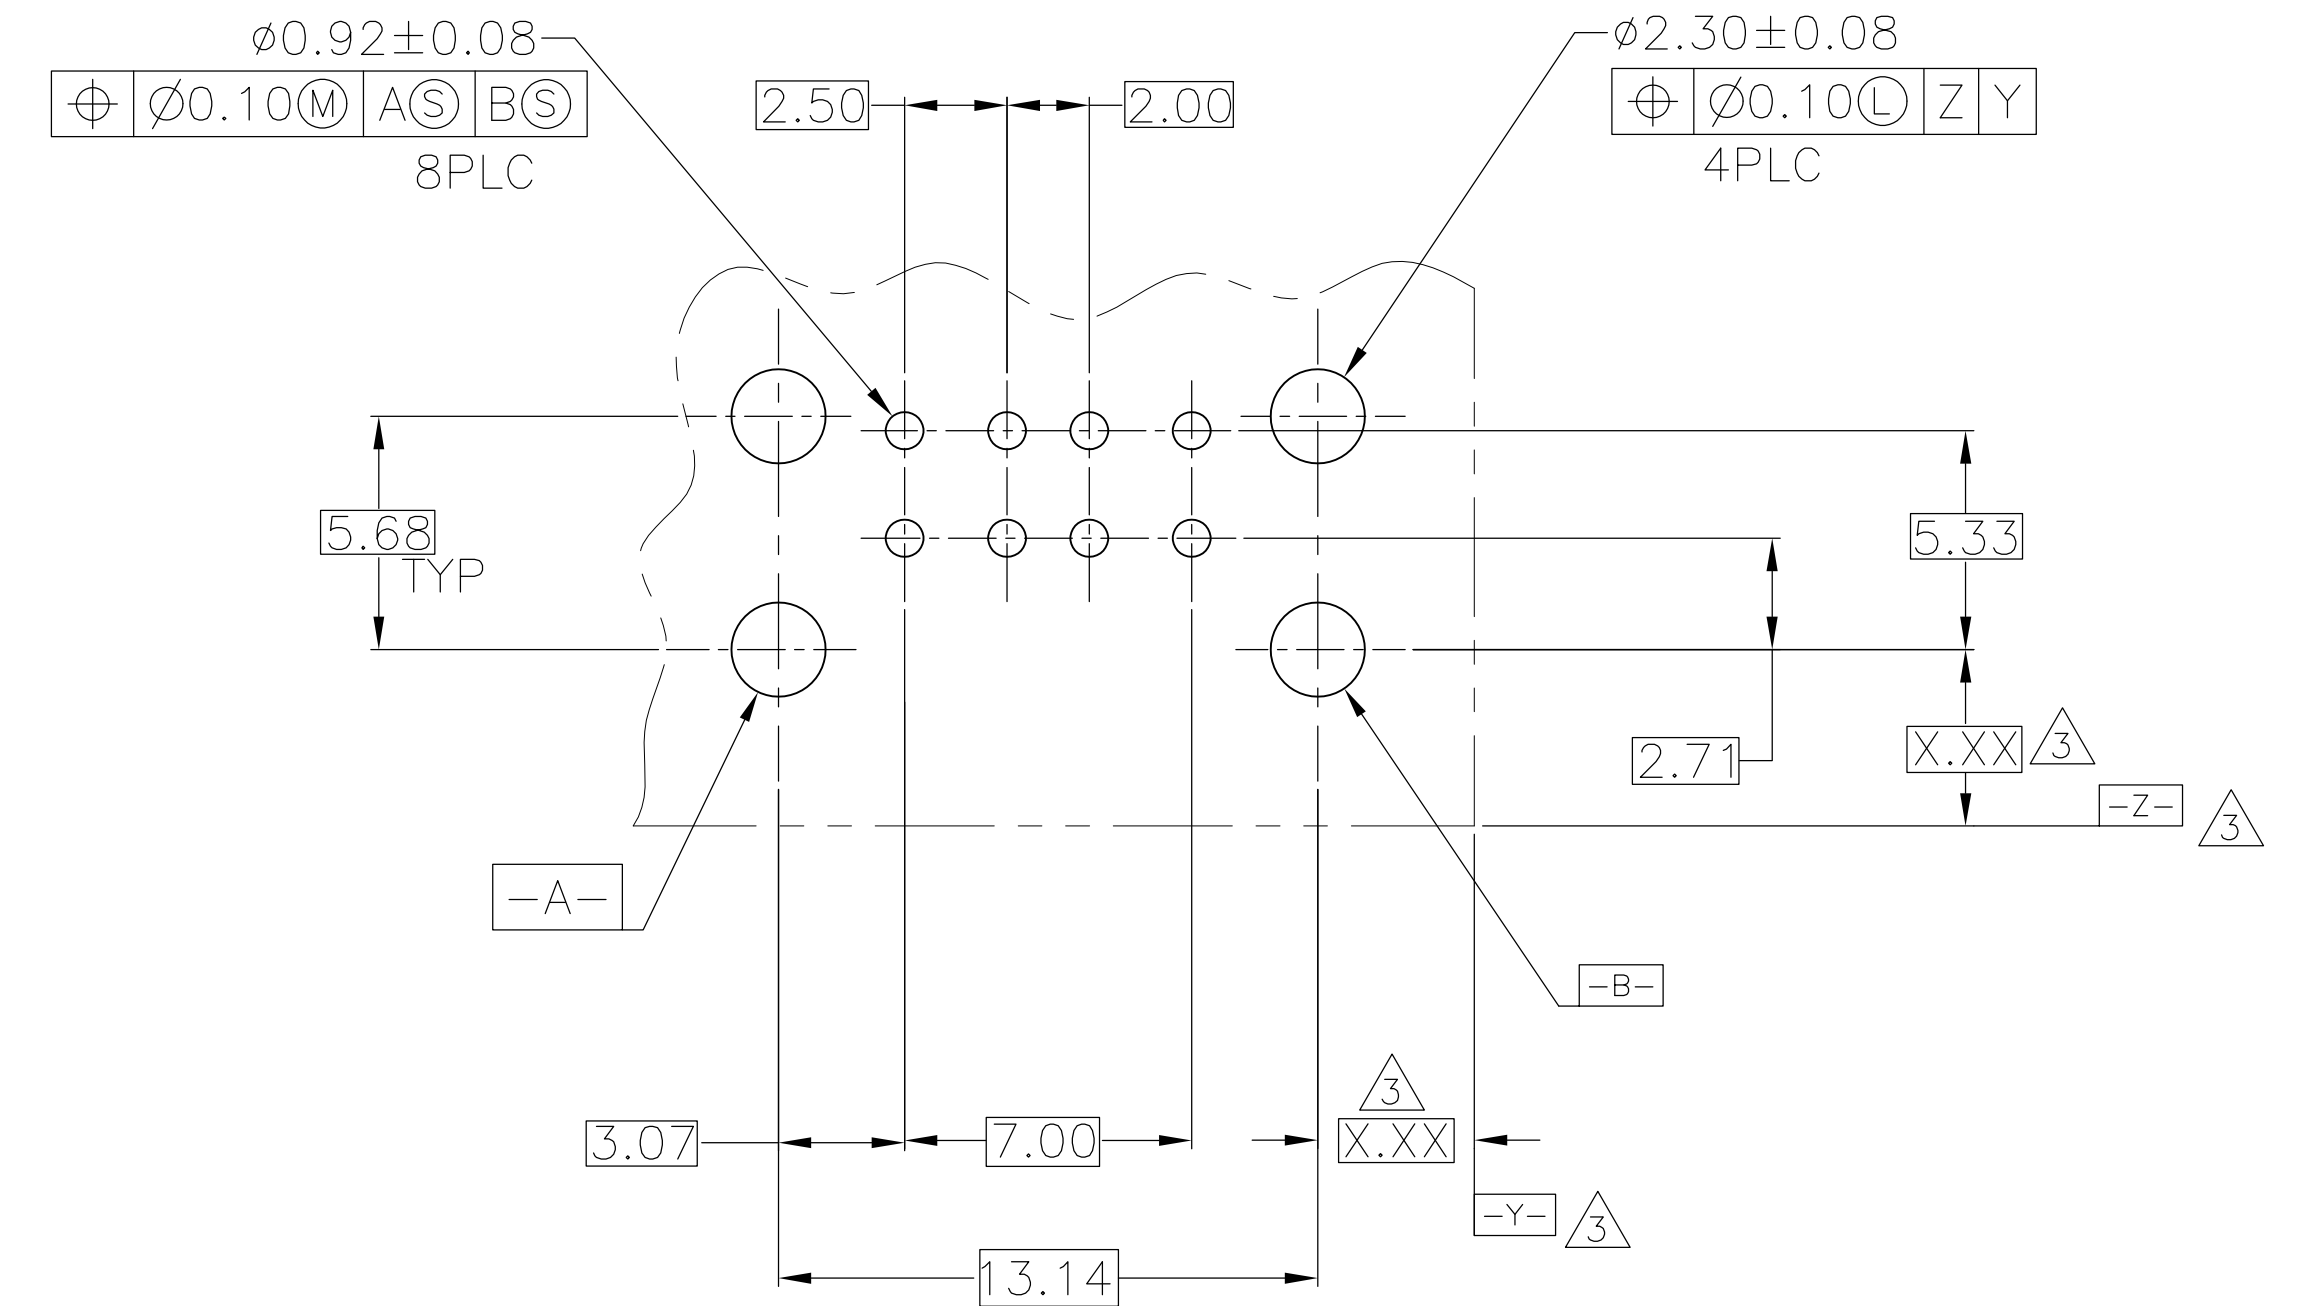


LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	AP'D
			E	REVISED PER ECR-08-014128	04JUN08	A.L	S.Y

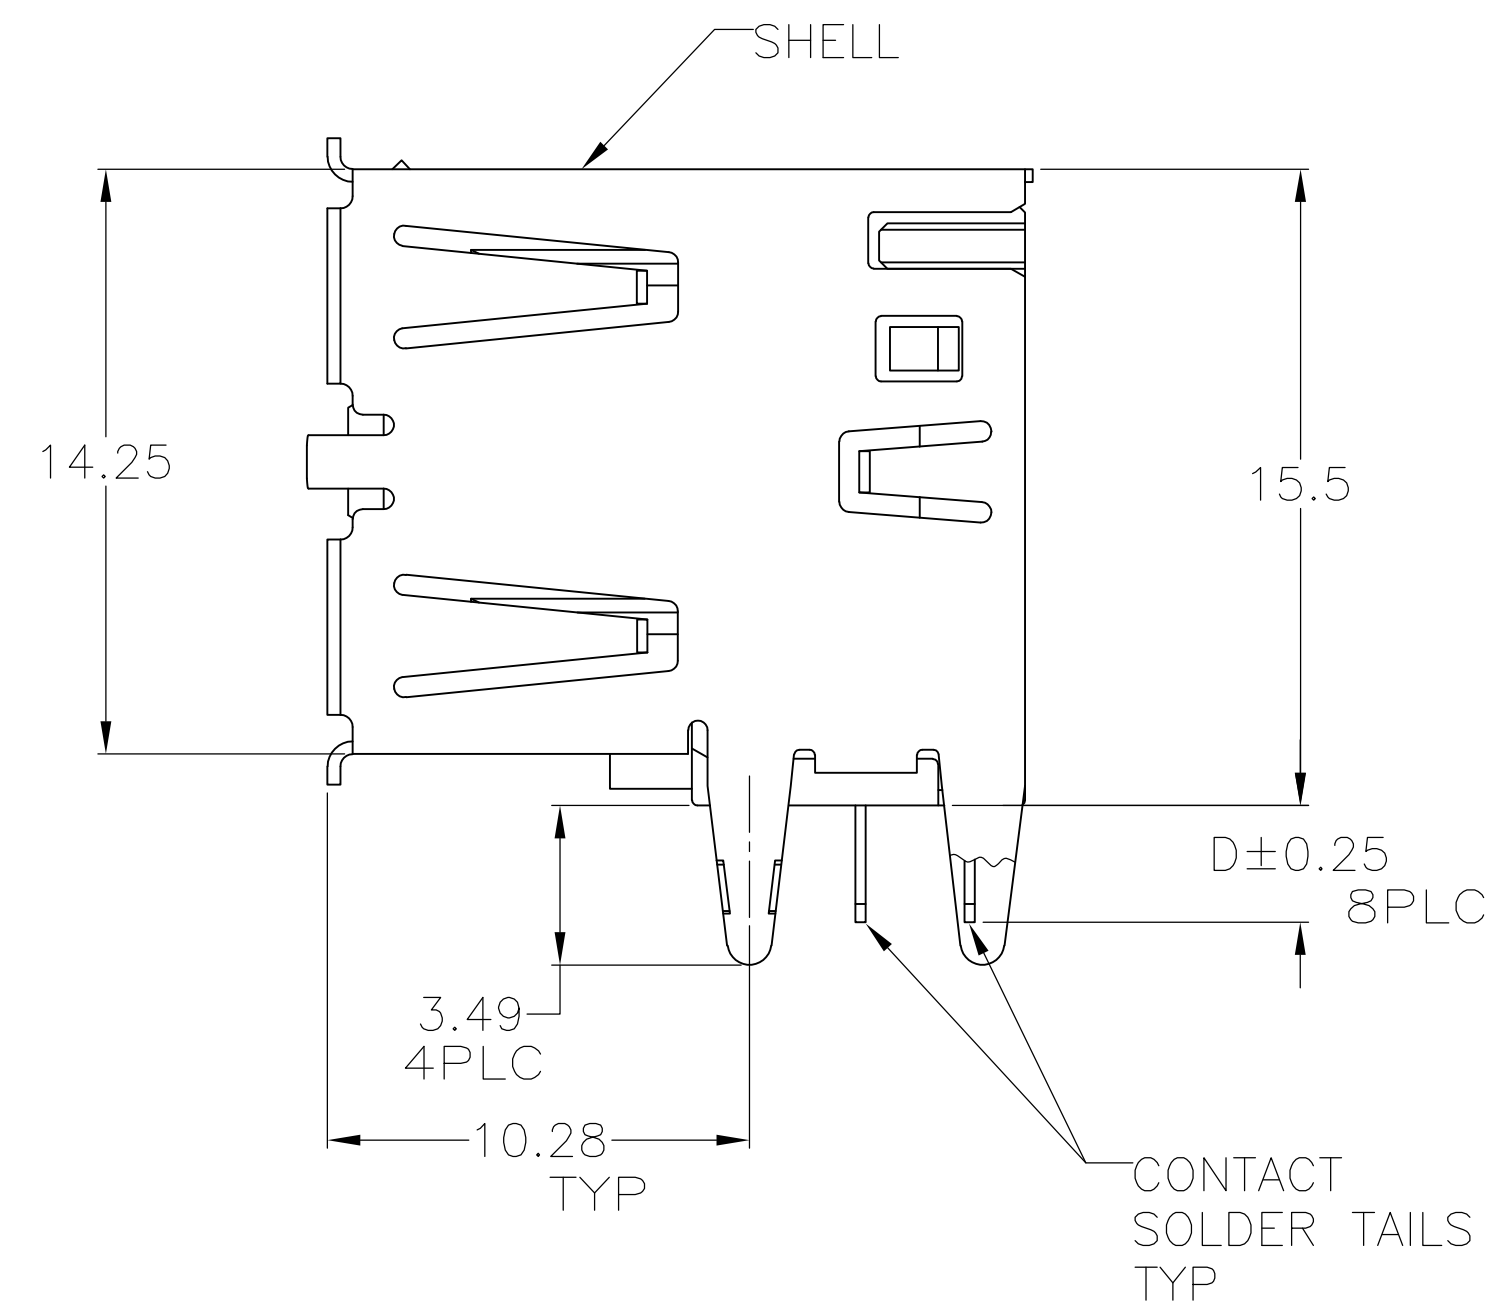


- ① MATERIAL:
SHELL & CONTACT—COPPER ALLOY
HOUSING—UL 94V-0 RATED, THERMOPLASTIC, SEE TABLE
② PLATING:
CONTACT— 0.076um MIN. GOLD OVER 0.76um MIN.
PALLADIUM—NICKEL ON MATING AREA ,OR CONTACT ALTERNATE
PLATING 0.76um MIN. GOLD ON MATING AREA.
3.8um MIN. MATTE TIN ON SOLDER TAILS.
BOTH OVER 1.27um MIN. NICKEL.
SHELL: 2~6.5um MIN. BRIGHT TIN.
③ DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
④ RECOMMENDED PC BOARD THICKNESS 1.57.

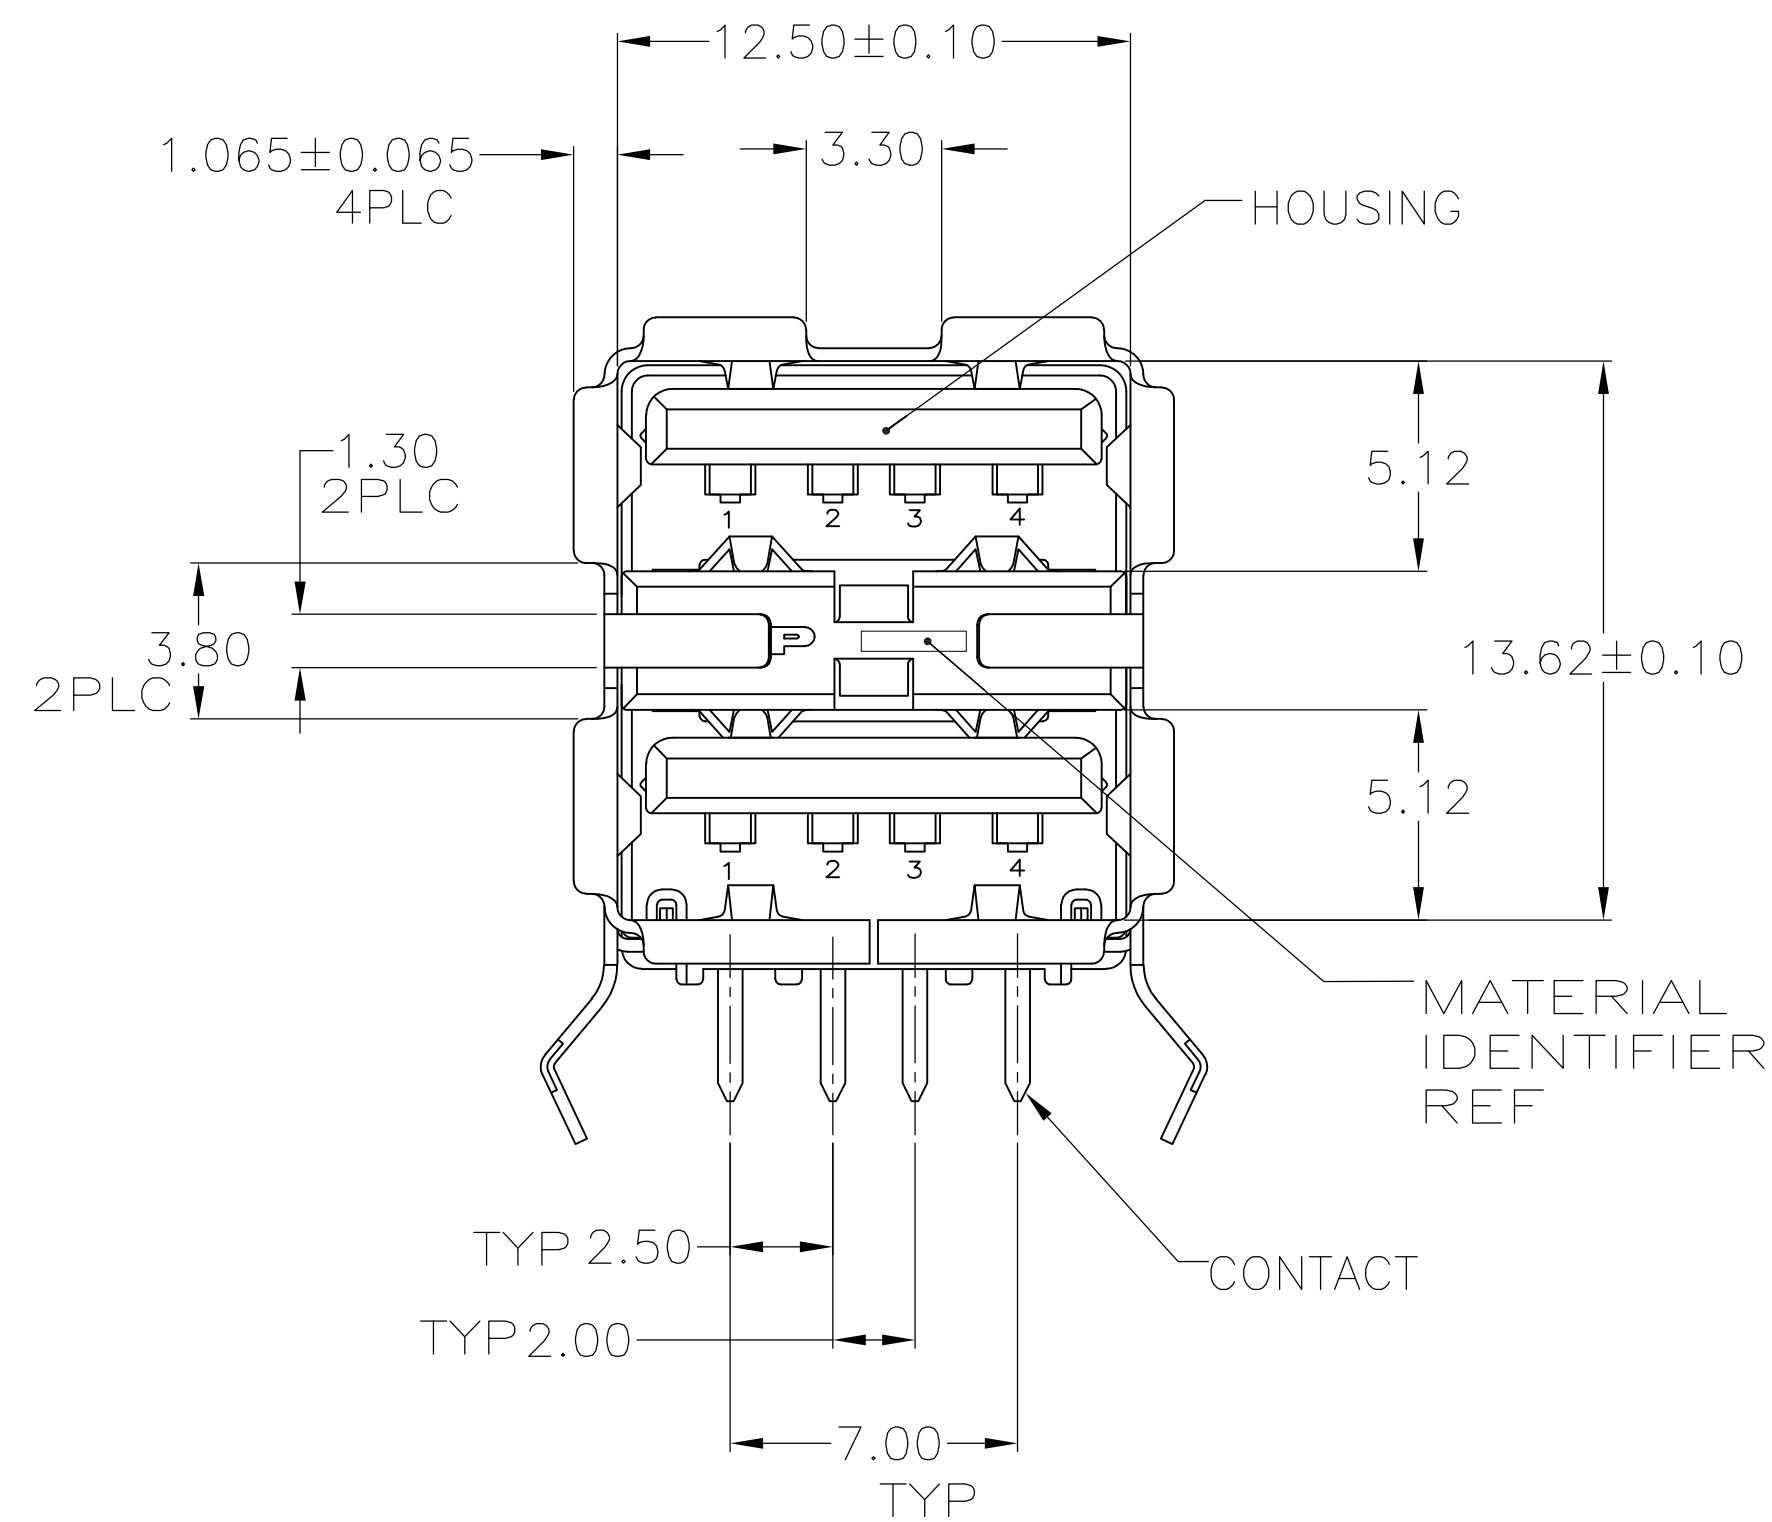

RECOMMENDED PC BOARD
MOUNTING DIMENSIONS

E)	NO	3.24	BLACK	292323-6
	YES	2.29	BLACK	292323-5
	YES	2.84	BLACK	292323-4
	NO	2.84	NATURAL	292323-3
	NO	2.29	BLACK	292323-2
	NO	2.84	BLACK	292323-1

HIGH TEMPERATURE COMPATIBLE	D	HOUSING COLOR	PART NUMBER
--------------------------------	---	------------------	----------------

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN 25FEB2004 SUNNY XU GKG S.YAO 25FEB04 APVO 25FEB04		 Tyco Electronics Corporation Shanghai, P.R.China, 200233	
DIMENSIONS: mm		TOLERANCES, UNLESS OTHERWISE SPECIFIED: 0 PLC ± -- 1 PLC ± -- 2 PLC ± 0.13 3 PLC ± -- 4 PLC ± -- ANGLES ± -- FINISH		NAME RECEPTACLE ASSEMBLY, RIGHT ANGLE STACKED, THRU-HOLE USB	
		PRODUCT SPEC 108-1586 APPLICATION SPEC 114-40054		SIZE CAGE CODE DRAWING NO A1 00779 C-292323	
MATERIAL 		WEIGHT --		RESTRICTED TO --	
		CUSTOMER DRAWING		SCALE 5:1 SHEET 1 OF 1 REV E	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[292323-3](#)