

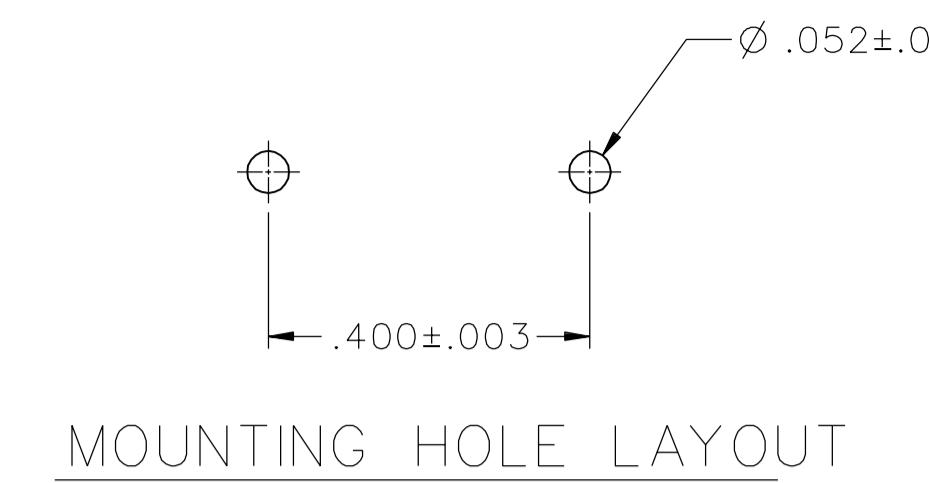


PART NUMBER	ITEM ① JACK BODY	ITEM ② CONTACT CLIP
105-XXXX-101	NYLON	COPPER SILVER PL .0001 MIN OVER CU. PL .000010 MIN
-102	NYLON	COPPER TIN PL .0001 MIN OVER NICKEL PL .000075+-0.00025
-105	NYLON	COPPER GOLD PL .00001 MIN OVER NICKEL PL .00005 MIN OVER CU, PL .000010 MIN
-109	NYLON	BERYLLIUM COPPER SILVER PL .0001 MIN OVER CU. PL .000010 MIN
-110	NYLON	BERYLLIUM COPPER GOLD PL .00001 MIN OVER NICKEL PL .00005 MIN OVER CU, PL .000010 MIN

SEE SEPERATE TABULATION OF
CATALOG DESIGNATION FOR VARIOUS
COLORED BODIES.

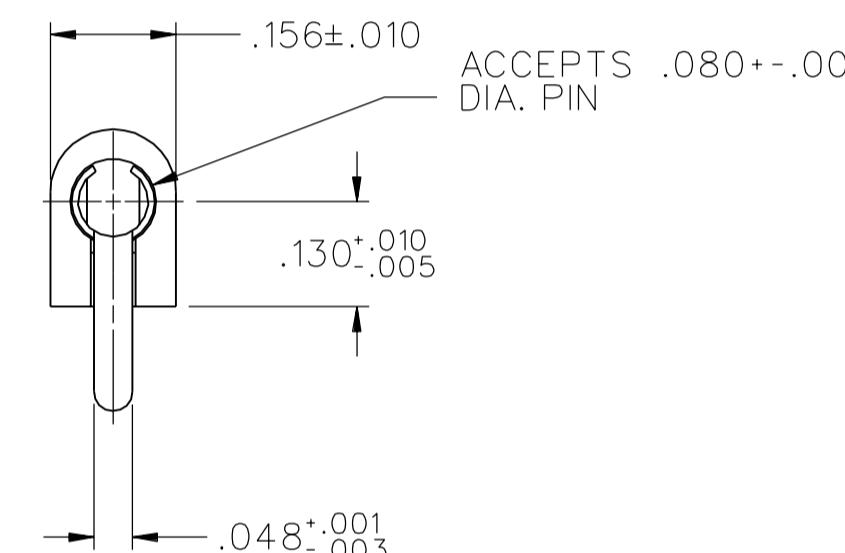

CATALOG DESIGNATION FOR VARIOUS COLORED BODIES			DRAWING NO. 2201-101	
PART NUMBER	COLOR	BODY NUMBER	C	- 105-2220-110
105-2201	WHITE	032-0120-151	0	REVISIONS
105-2202	RED	032-0120-152		VERSION UPDATE
105-2203	BLACK	032-0120-153	27	7-28-91
105-2204	GREEN	032-0120-154	R	R
105-2206	ORANGE	032-0120-156	H	B
105-2207	YELLOW	032-0120-157		
105-2208	BROWN	032-0120-158		
105-2210	BLUE	032-0120-160		
105-2212	VIOLET	032-0120-162		
105-2213	GRAY	032-0120-163		

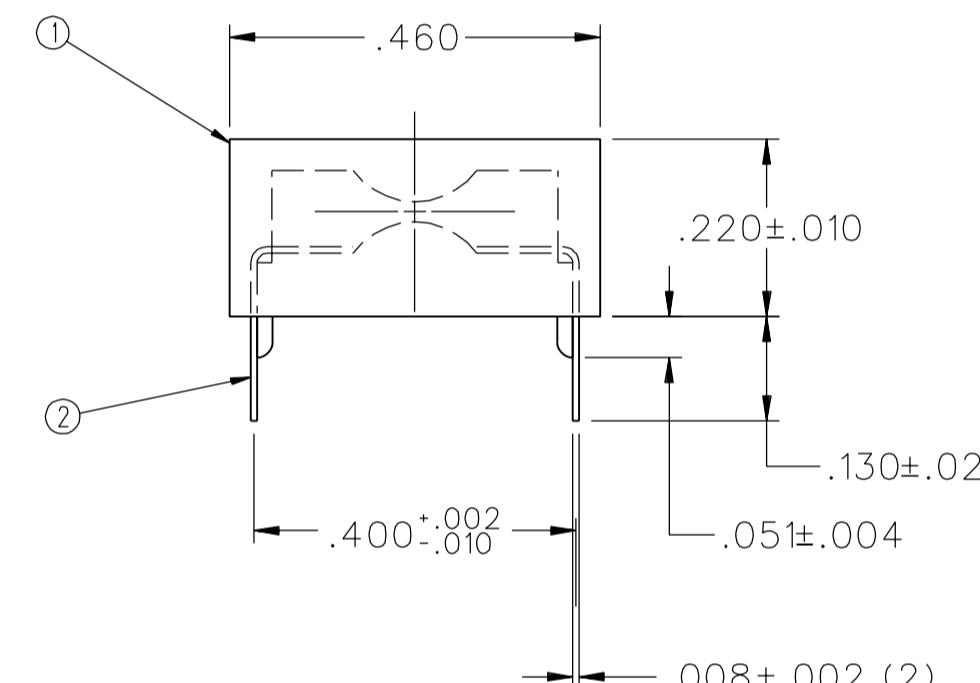

CUSTOMER DRAWING

THIS DRAWING TO BE INTERPRETED
PER ASME Y 14.5M - 1994

"μ STATION"

COMPANY CONFIDENTIAL

NOTES:

1. VOLTAGE RATING: 2125 VDC AT SEA LEVEL, 500 VDC AT 50,000 FT.
2. CAPACITANCE BETWEEN TWO ADJACENT JACKS: LESS THAN 1pF AT 1 MHz.
3. CURRENT RATING: 5 AMPERE AT 60 Hz.
4. CONTACT RESISTANCE: 5 MILLIOHMS MAX FOR GOLD PL PARTS AND 10 MILLIOHMS FOR ALL OTHERS.
5. CIRCUIT BOARD THICKNESS REF: .093 MAX.

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY R. HOVLAND (R. WEBER)	DATE 3-28-91 (11-8-76)
DECIMALS .XX	mm —	CHECKED BY _____	DATE _____
.XXX ±.005		APPROVED BY RJB	DATE 7-29-91
MATL _____		RELEASE DATE 7-29-91	_____
FINISH _____		U/M INCH	SCALE 4/1
SHEET 2 OF 2	DRAWING NO. C - 105-2201-101		



Cinch Connectivity Solutions
P.O. Box 1732
Waseca, MN 56093
1-800-247-8256

TITLE
HORIZONTAL TIP JACK,
INSULATED AND RUGGEDIZED FOR
.080 DIA TIP PLUG

SHEET
2 OF 2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions:](#)

[105-2206-201](#)