




D

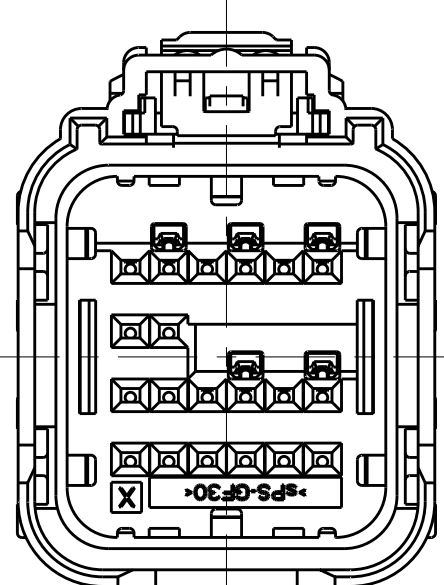



OPTION "B"

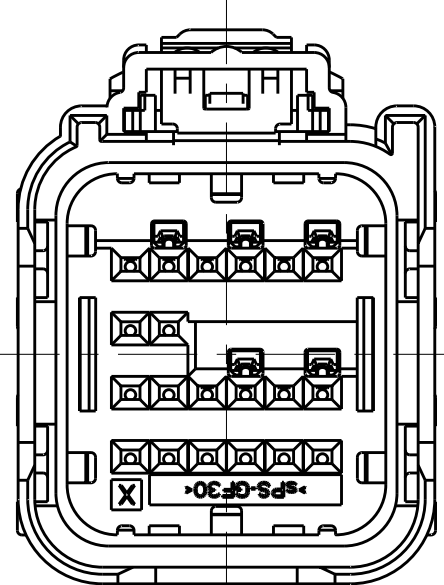

OPTION "D"



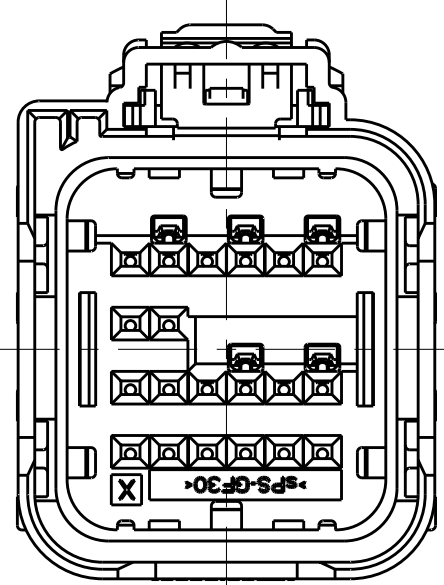


OPTION "F"

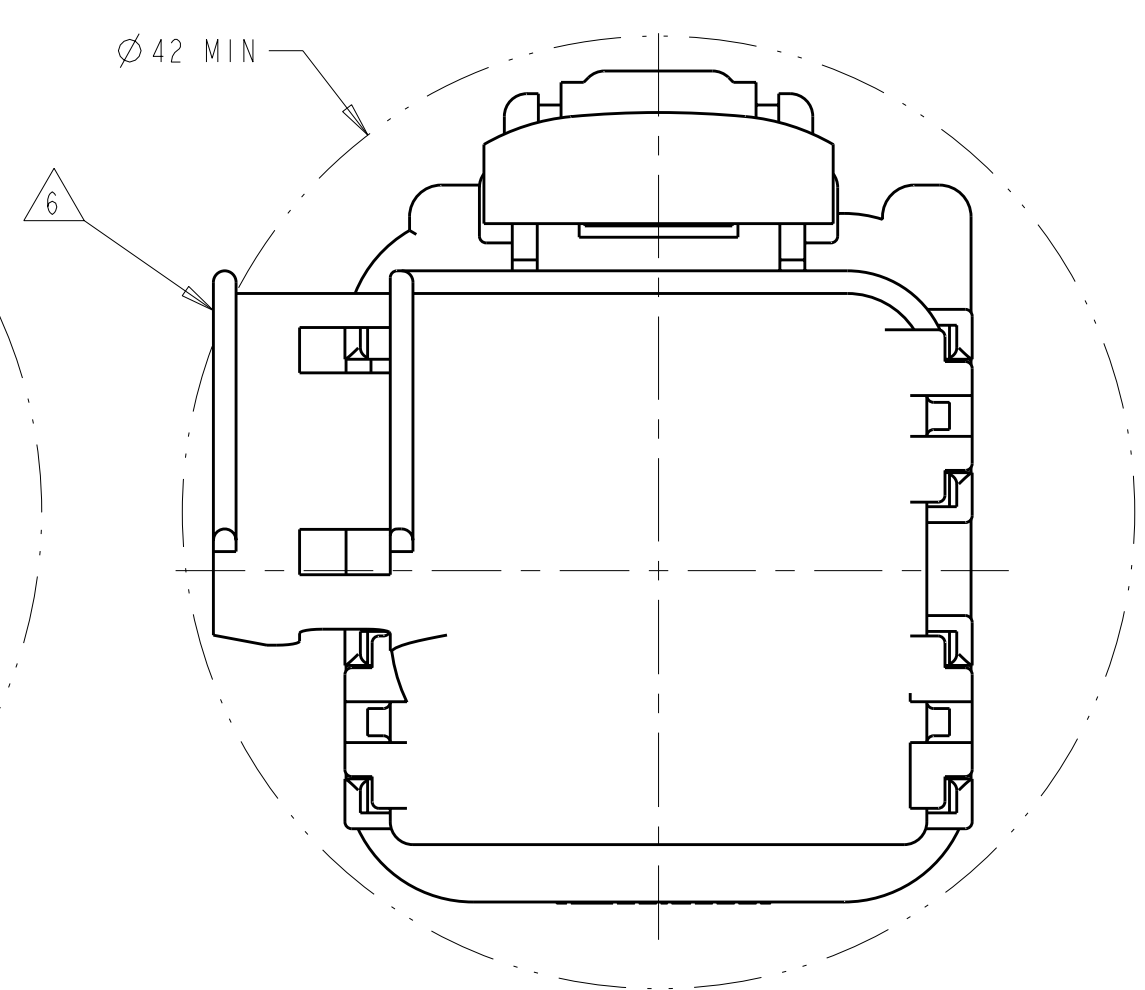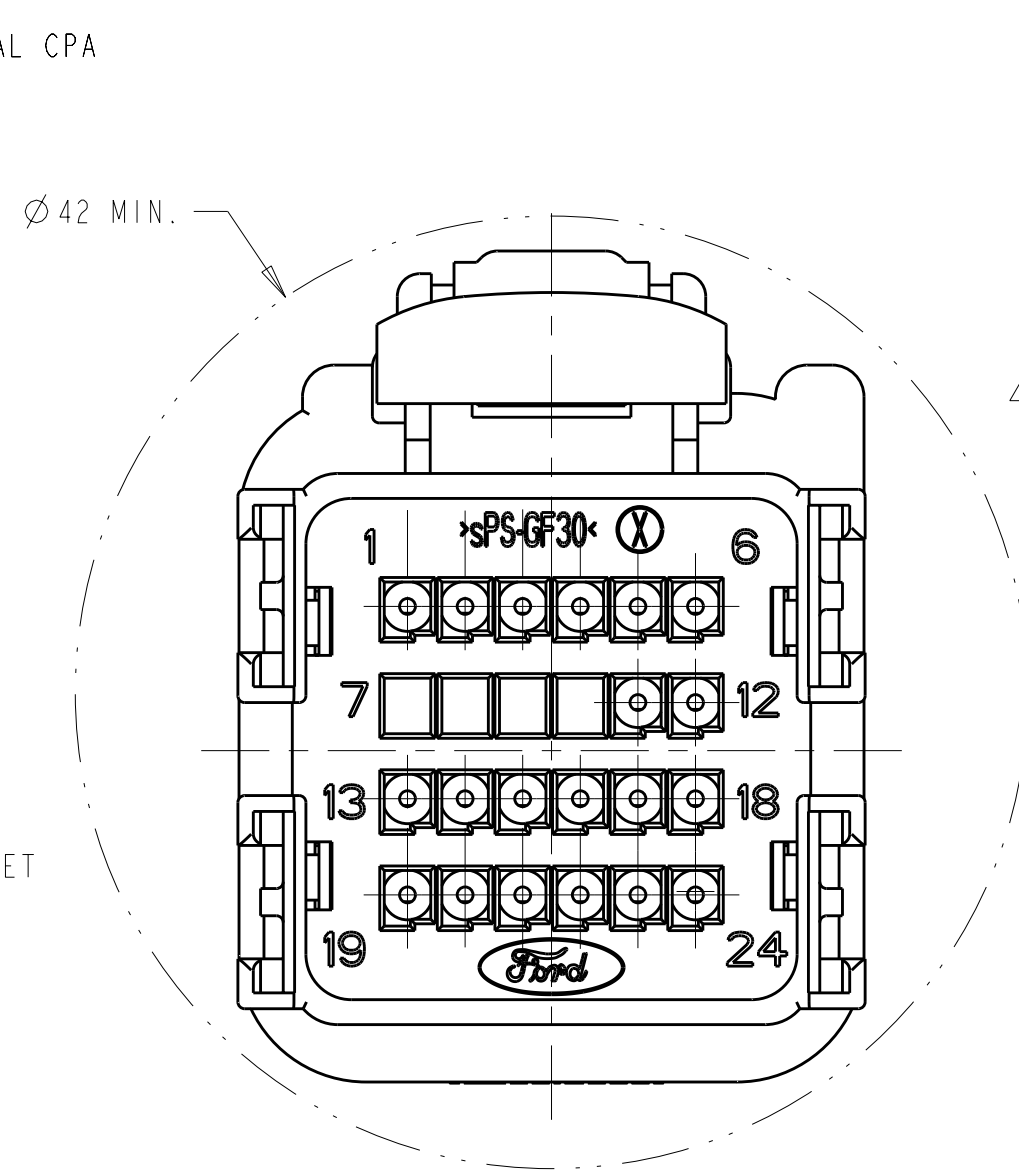


MINIMUM FEED THROUGH CONDITION
WITH 1mm CLEARANCE ALL AROUND

MINIMUM FEED THROUGH CONDITION
WITH 1mm CLEARANCE ALL AROUND
SHOWN WITH OPTION WIRESHIELD

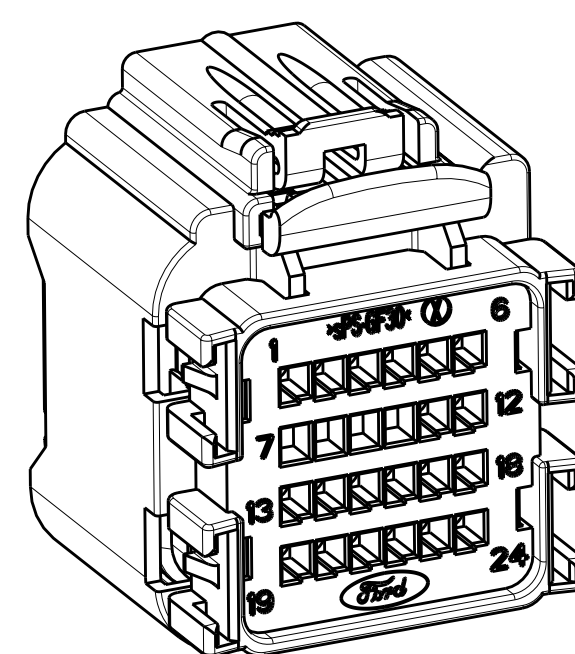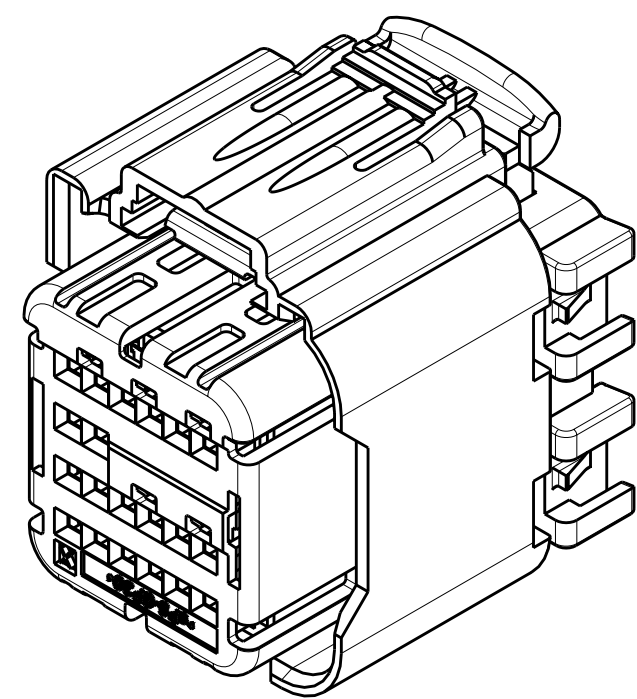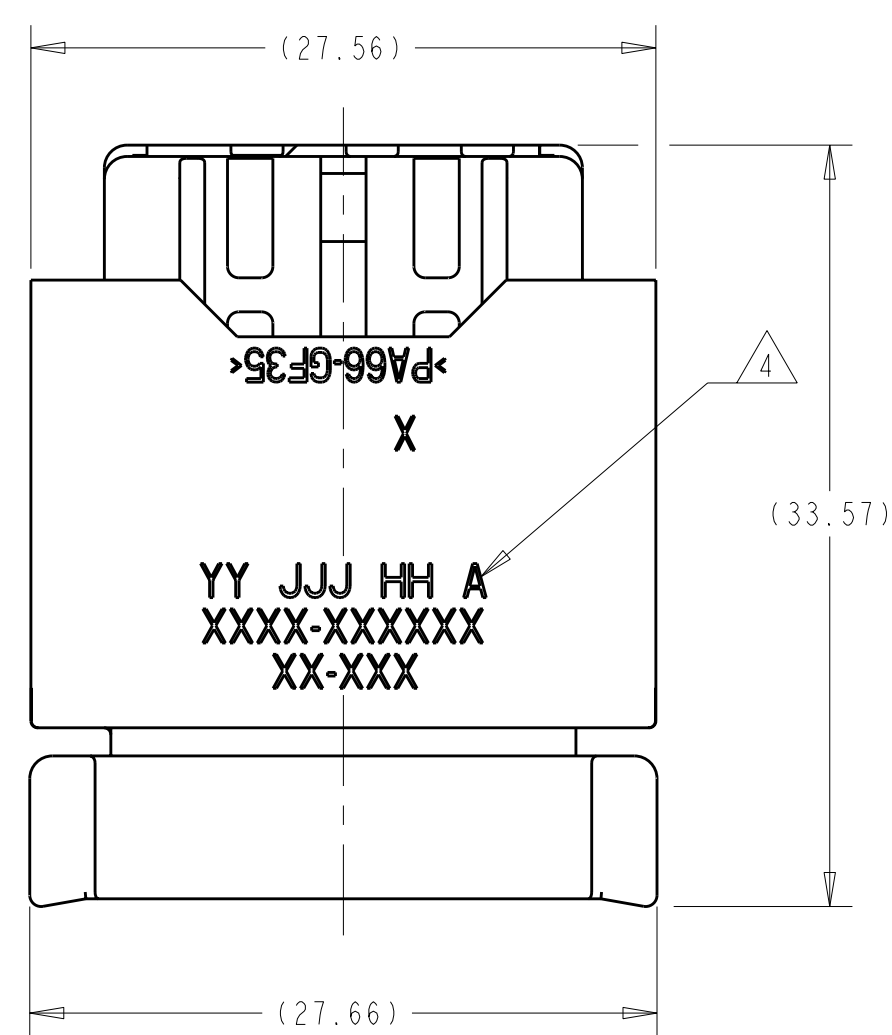

SCALE 2:1


SCALE 2:



SCALE 1:

KEYING OPTION "A" SHOWN

[illegible]

THIS DRAWING IS A STANDARD DRAWING FOR WHICH THE DESIGNER ASSUMES NO LIABILITY. THE USER OF THIS DRAWING SHOULD BE CONTACTED FOR THE LATEST REVISION.		DATE R. VESTAL 23JUL2007 CHKD W. WELLINSKY 23JUL2007 APPV W. WELLINSKY 23JUL2007		 Tyco Electronics Harrisburg, PA 17105-3608	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0. PLC ± 1. PLC ±0.3 2. PLC ±0.10 3. PLC ± 4. PLC ± ANGLES ±°		NAME 24 WAY ARM PLUG ASSEMBLY WITH SHORTING BARS CUSTOMER SPEC.	
		PRODUCT SPEC APPLICATION SPEC		SIZE CAGE CODE DRAWING NO A 00779 C=1924670	
MATERIAL SEE CHART ABOVE		WEIGHT SEE NOTE 5		RESTRICTED TO	
FINISH -		CUSTOMER DRAWING		SCALE 3:1 SHEET 1 of 3 REV D	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1924672-1](#)