


Leiterplatten-Layout Vorschlag für SMT
PCB-Layout Proposal for SMT

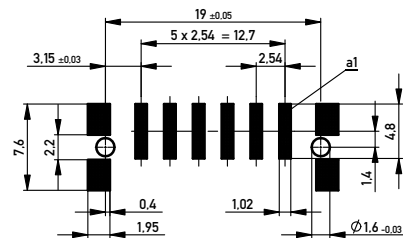


Anforderungsstufe 1
Performance Level 1

Kontaktbereich vergoldet
Mating Area gold plating


Anschlussbereich verzinkt 4-6 µm
Terminal Area 4-6 µm tin plating

Koplanarität der Anschlüsse ≤ 0,1 mm
Coplanarity Area of Termination ≤ 0.1 mm

Verpackt in Gurtverpackung
Tape on Reel Packaging
Verpackungseinheit: 320 Stück
Packaging unit: 320 pcs



← Abspulrichtung - Reel off Direction

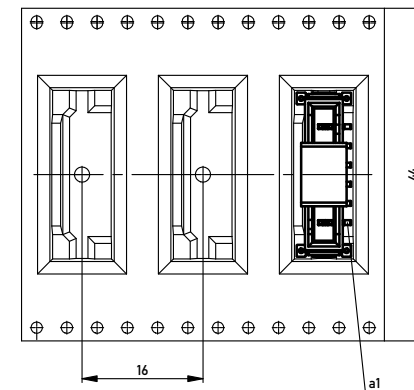

454209		weiß white					Codierung wie Variante schwarz Encoding such variant black
254710		rot red	4.2	3.0	4.8	2.4	
254709		grün green	3.0	4.2	3.6	3.6	
254708		blau blue	1.8	5.4	2.4	4.8	
254707		schwarz black	0.6	6.6	1.2	6.0	
Ident-Nr. part-no.	Codierung coding	Farbe color	A	B	C	D	Bemerkung note

Information:			Tolerances	 All Dimensions in mm	Scale 3:1	
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.			Subject to modification without prior notice. Drawing will not be updated.		Designation	
					M 2.54 SRC-P, 6-polig	
h		30.04.2013	 www.ERNI.com		224915	
Index		Date			I A2	
					Class	SRCP

Copyright by ERNI GmbH
Prior delivery notice pursuant to ISO 10016 to be observed

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16949 to be observed

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[254707](#) [254709](#) [254710](#) [254708](#)