

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


NOTES:

1. IDENTIFICATION: 1RU HORIZONTAL, (10) 5-15R
120V / 15A / SINGLE-PHASE POU WITH SURGE




PART NO.	COLOR
CMRPSH15S	BLACK

2. ACCESSORY COMPONENTS:
(4) 10-32 x 1/2" MOUNTING SCREWS
(4) 12-24 x 1/2" MOUNTING SCREWS

3. JOULE RATING 720
4. UL 1449M RATING (500 AMPS) 330 VOLTS
5. CLAMPING LEVEL < 315 VOLTS
6. RESPONSE TIME < 5 NANoseconds
7. TECHNOLOGY USED - SUPER MOVs
8. DIMENSIONS IN PARENTHESEs ARE METRIC (mm).
9. UL & c-UL LISTED 60950.
10. RoHS COMPLIANT.
11. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART.
12. MAXIMUM AVAILABLE INPUT POWER = 1.4 KW
13. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES.

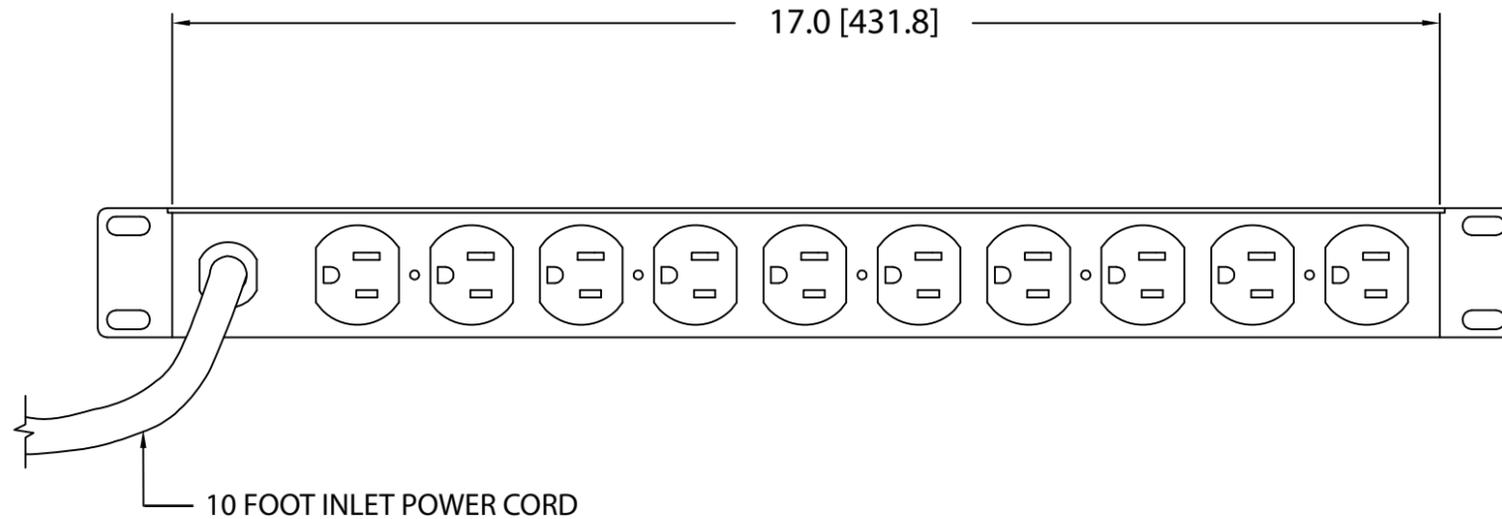

PANDUIT P/N	WEIGHT
CMRPSH15S	6 lb (2.7 kg)

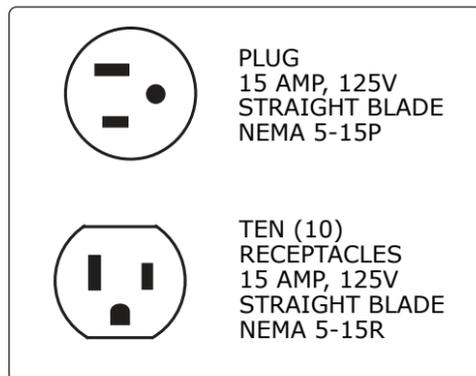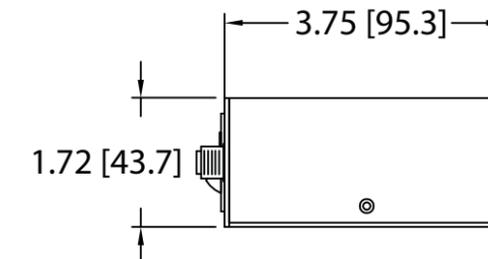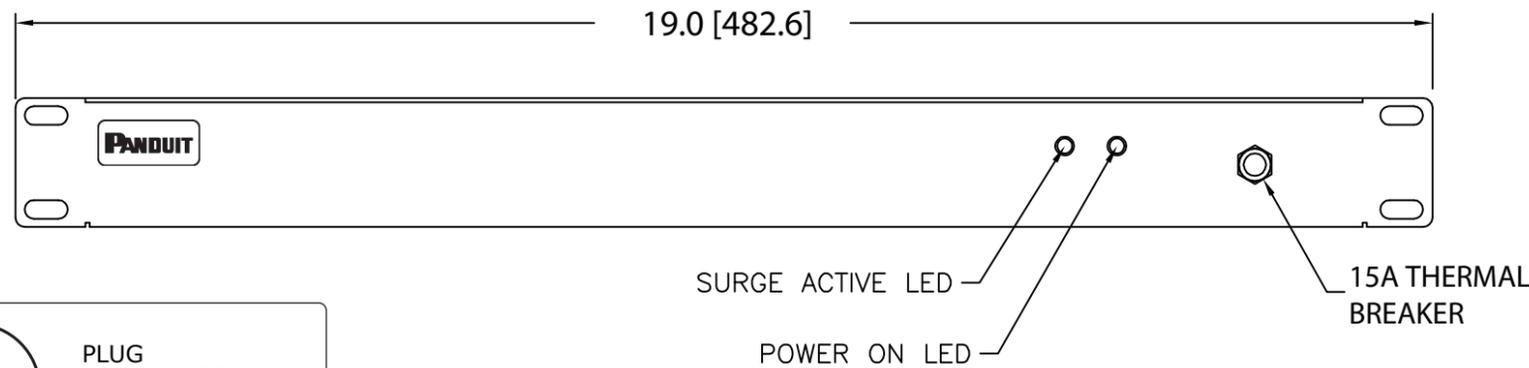

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
00B	3-27-12	MRWA		A. CHANGED BREAKER AMPERAGE	09V098YA				
00A	10-26-11	MRWA		RELEASED TO PRODUCTION	09V098YA				

MODEL FILENAME		09V098YA/00.PRT	
CAD FILENAME/LAYERS		09V098YA_DC/00A.PRT	
PANDUIT CORP TINLEY PARK, ILLINOIS			
1RU HORIZONTAL, (10) 5-15R POWER OUTLET UNIT (CMRPSH15S) CUSTOMER DRAWING			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:		UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION	
INCHES	X.X +/- 0.03	[METRIC - MILLIMETER]	ANGLE
	X.XX +/- 0.015	X.X +/- 0.8	+/- 1°
	X.XXX +/- 0.005	X.XX +/- 0.4	
		X.XX +/- 0.13	
DRAWN BY		MAT'L:	
MRWA			
DATE		SCALE	
10-26-11		NONE	
CHK'D		DRAWING NO.	DWG
		09V098YA	B
			SIZE

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Panduit:](#)

[CMRPSH15S](#)