



LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
—	—		A	REVISED PER 0S14-0150-05	19NOV2005	REH GM

1. DESIGNED FOR USE WITH 6.35 [.250] S.R. CABLE.
2. CAPTURED CENTER CONTACT.
3. SEE INSTRUCTION SHEET 408-4623.

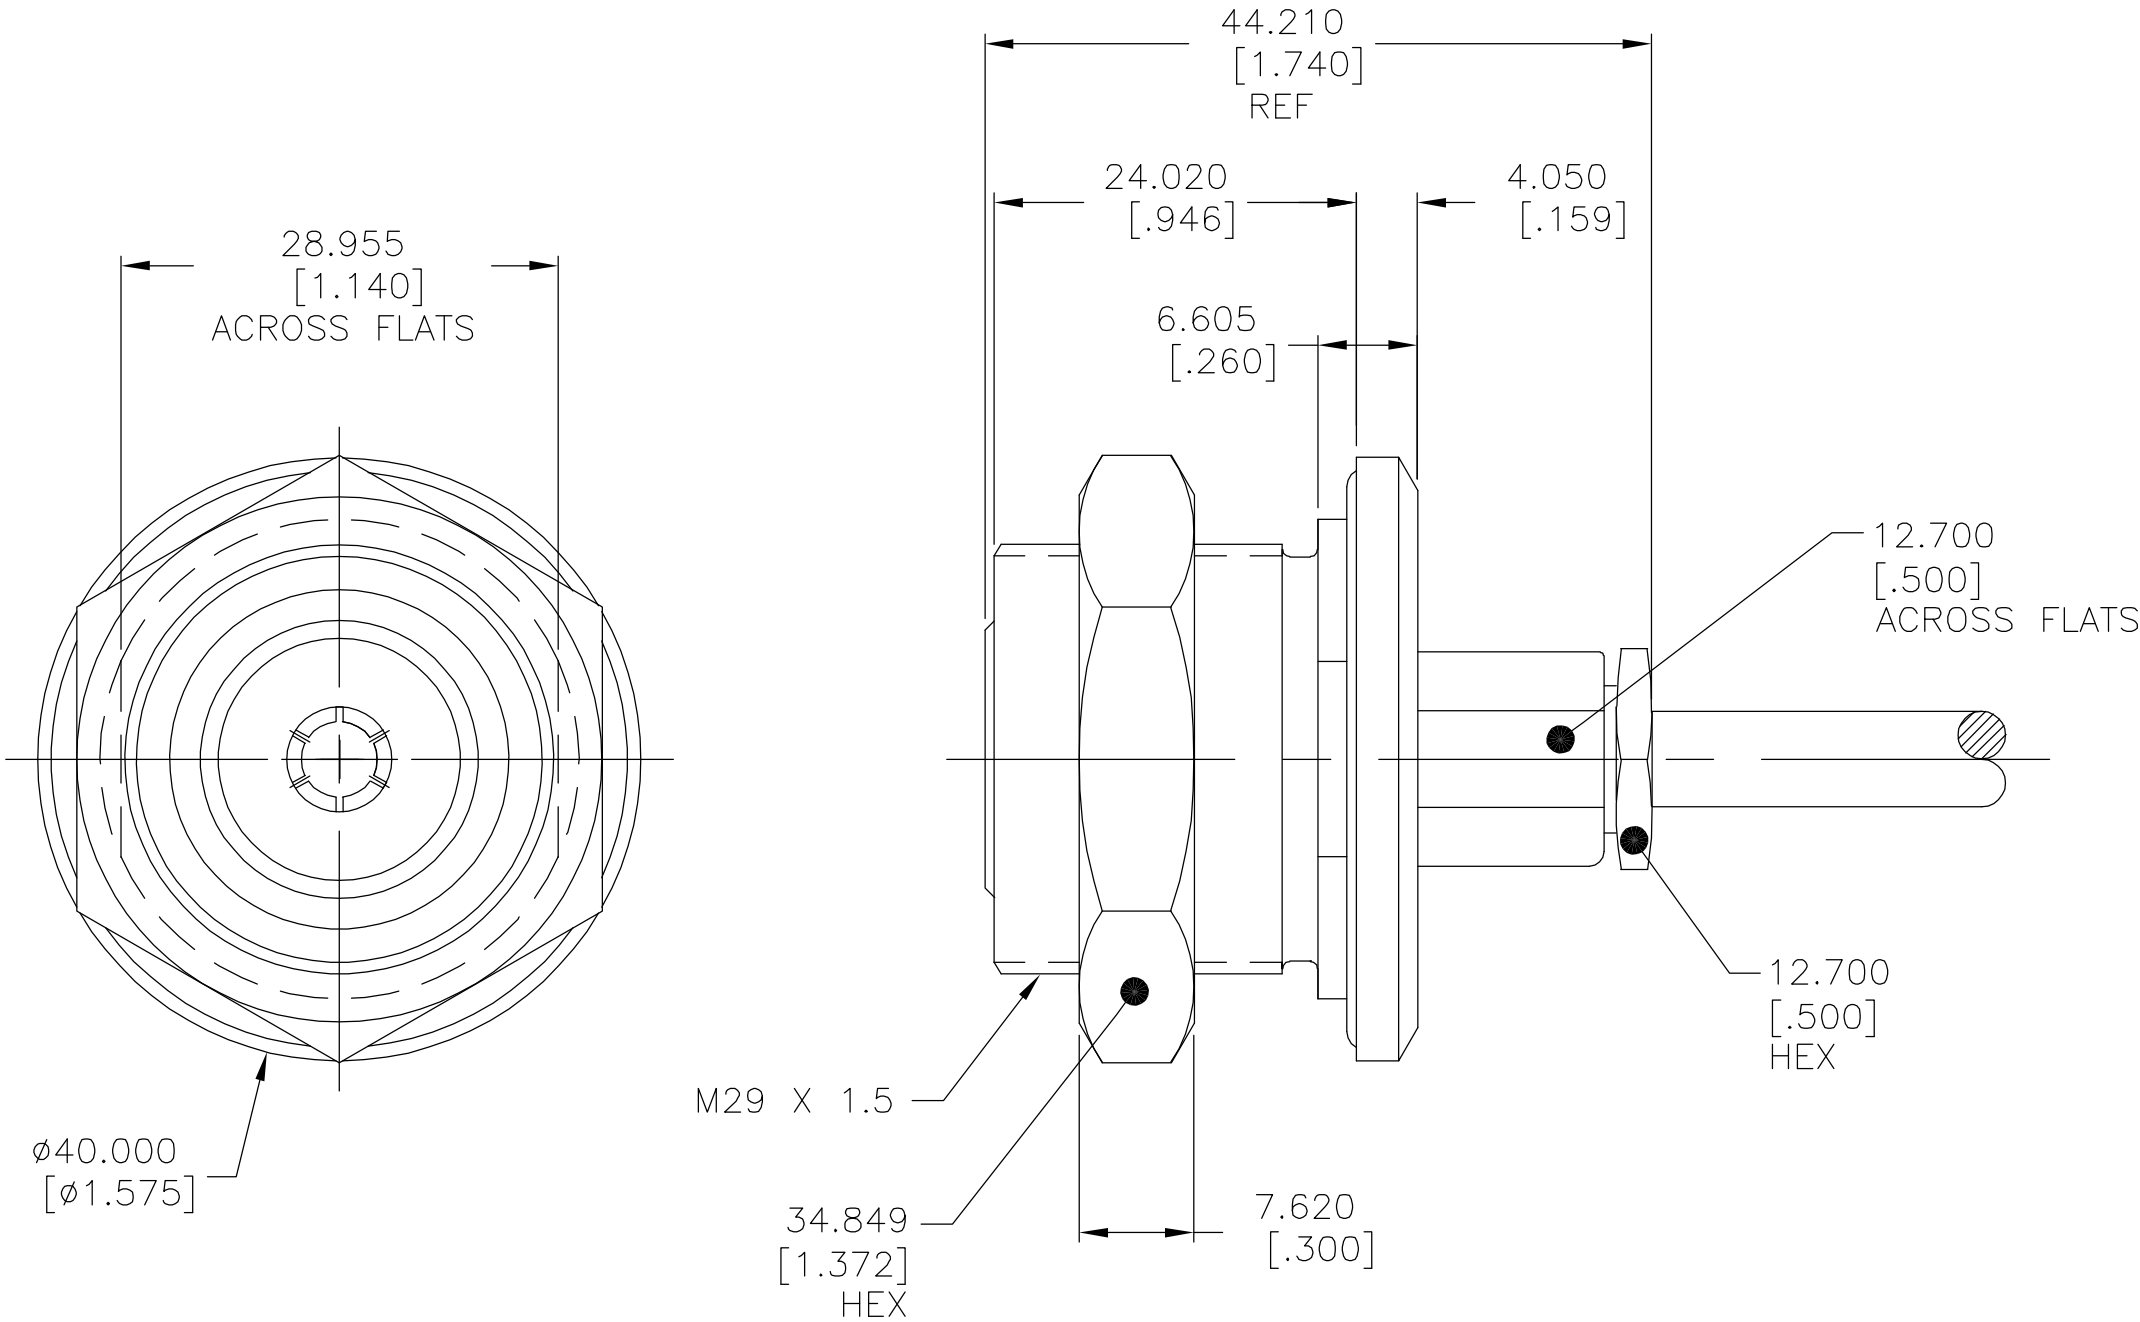

HOUSING, OUTER CONTACT, CLAMP NUT, MOUNTING NUT	BRASS PER ASTM-B-16 HALF HARD	WHITE BRONZE PLATE
DIELECTRIC	PTFE FLOUROCARBON PER ASTM-D-1457	N/A
CENTER CONTACT	BERYLLIUM COPPER PER ASTM-B-196 OR ASTM-B-197 ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204
SOLDER SLEEVE	BRASS PER ASTM-B-16, HALF HARD	GOLD PLATE PER MIL-G-45204
GASKET	SILICON RUBBER PER ZZ-R-765	N/A
COMPONENT	MATERIAL	FINISH

CLAMP NUT	$\phi 6.909$ [.272]
SLEEVE	$\phi 6.426$ [.253]
CONTACT	$\phi 1.625$ [.064]
CABLE ENTRY DIAMETER MINIMUM	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN HAMNER 19NOV2005		tyco Electronics Tyco Electronics Corporation Harrisburg, PA 17105-3608							
		CHK G.MICHAEL 19NOV2005		NAME 7/16 BULKHEAD JACK SOLDER CLAMP ATTACHMENT (8804-5004-94)							
DIMENSIONS: mm [INCHES]		APVD G.MICHAEL 19NOV2005									
		PRODUCT SPEC —									
		APPLICATION SPEC —									
		WEIGHT —									
MATERIAL —		FINISH —		SIZE A2		CAGE CODE 00779		DRAWING NO C=6089067		RESTRICTED TO —	
CUSTOMER DRAWING				SCALE 2:1		SHEET 1 of 1		REV A			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6089067-1](#)