


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AJ	—		D	REV PER ECO 07-027463	14DEC2007	DW	JL

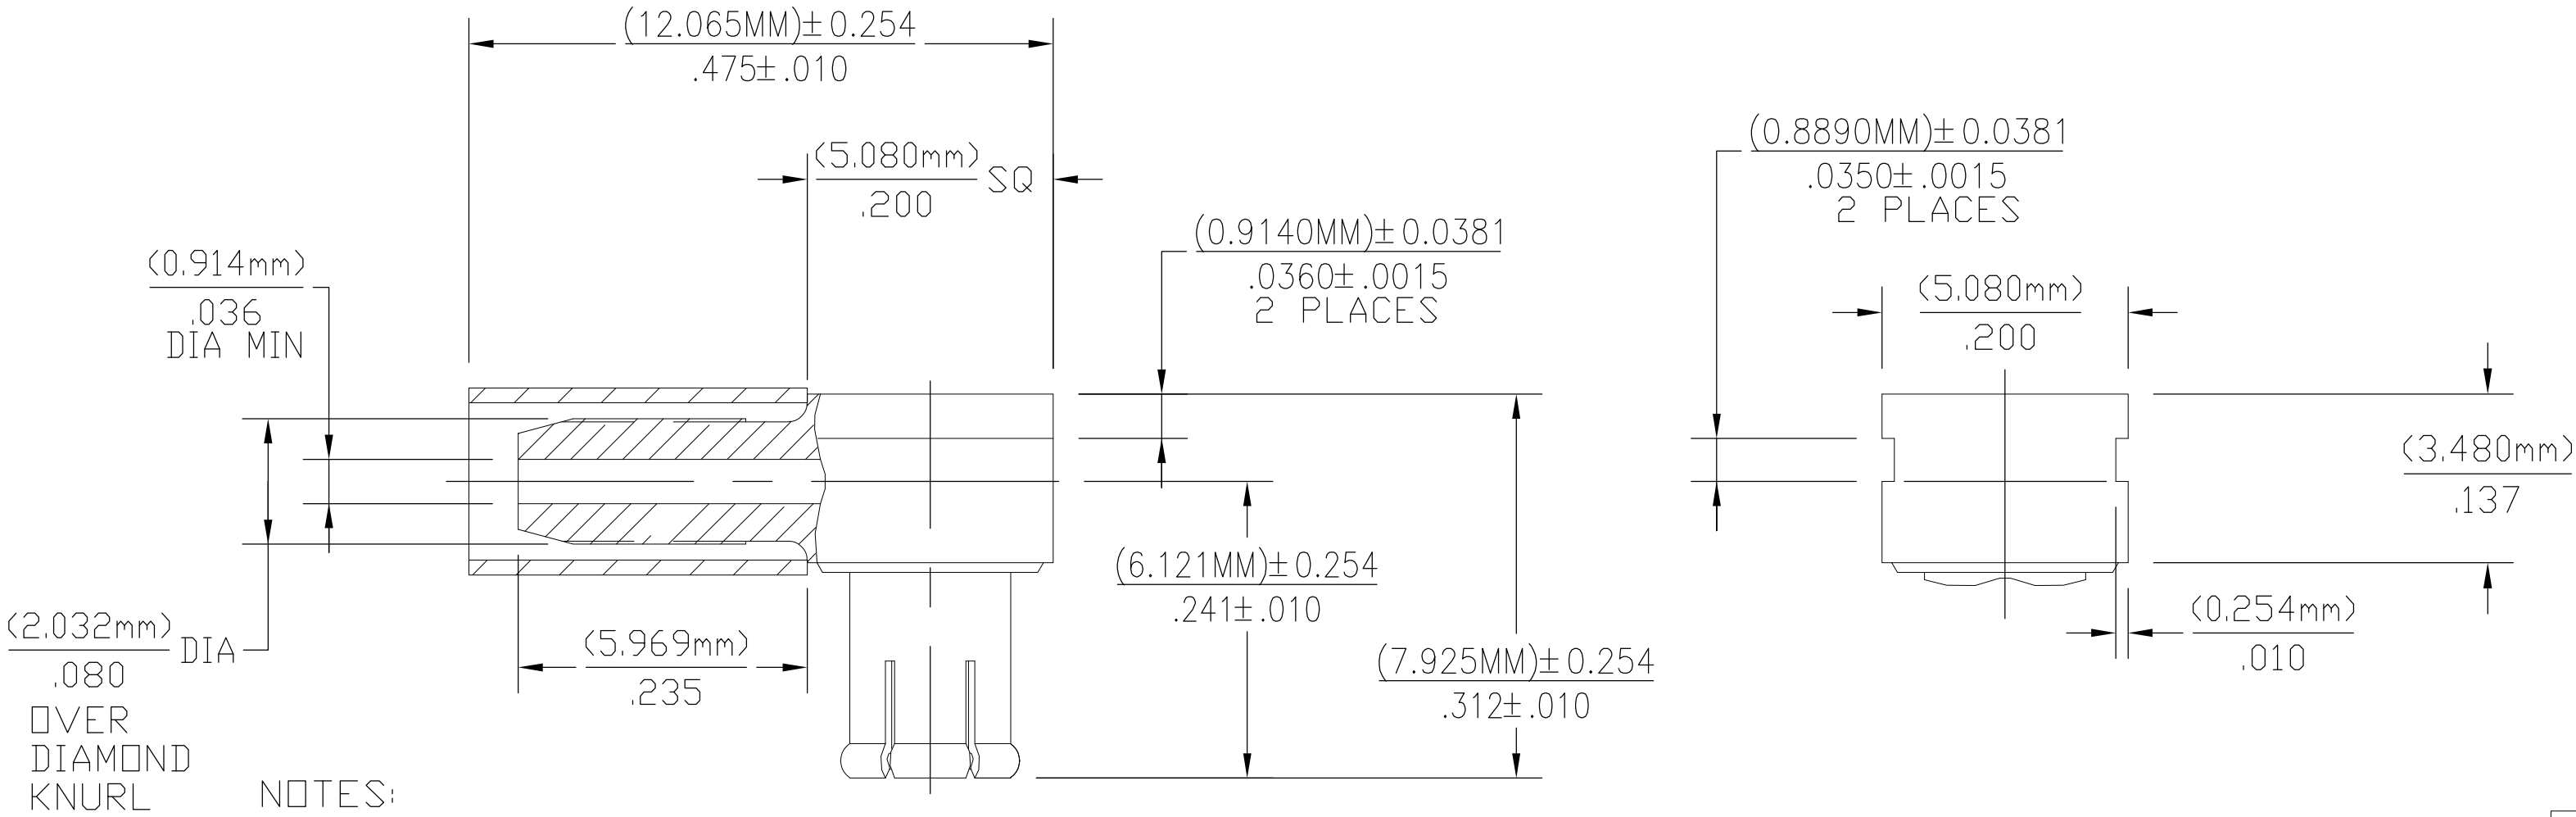


CABLE ENTRY DIAMETER MINIMUM	
CONTACT	.023(.584mm) SLOT
HOUSING	.036(.914mm)
FERRULE	.098(2.489mm)

1. DESIGNED FOR USE WITH RG 178 & 196 CABLE
SEE INSTRUCTION SHEET 408-4634

HOUSING	BRASS PER QQ-B-626	NICKEL PLATE PER QQ-N-290
CAP	COMP. 360	
CENTER CONTACT		
DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457	N/A
CONTACT FINGER	BERYLLIUM COPPER PER ASTM B 196, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204
FERRULE	SOFT COPPER ALLOY	NICKEL PLATE PER QQ-N-290
COMPONENT	MATERIAL	FINISH

ELECTRICAL	MECHANICAL	ENVIRONMENTAL
Nominal Impedance (Ohms) <u>50</u>	Force to Engage (Lbs MAX) <u>3.4lbs</u>	Temperature Rating <u>-65°C TO 165°C</u>
Frequency Range (GHz) <u>DC TO 4.0</u>	Force to Disengage <u>1.77lbs min, 4.5lbs max</u>	Vibration <u>MIL-STD-202, Method 204, Condition B</u>
Voltage Rating (VRMS MAX) <u>335 @ Sea level</u>	Center Contact Captivation: <u>Axial 4.5lbs @ 1 minute</u>	Thermal shock <u>MIL-STD-202, Method 102, Condition C</u>
VSWR <u>1.15:1 MAX</u>	Cable Retention <u>Axial (Lbs) 24.5 lbs min</u>	Moisture Resistance <u>MIL-STD-202, Method 106D, 10 cycles 24 hours</u>
Insertion Loss <u>.1dB x FGHz</u>		Corrosion <u>MIL-STD-202, Method 101, Condition B</u>
Corona, 70,000 Ft (VRMS MIN) <u>250</u>		
D.W.V. (VRMS MIN) <u>1000</u>		
Contact Resistance		
Center Contact (Milliohms MAX) <u>5.0</u>		
Outer Contact (Milliohms MAX) <u>1.0</u>		
Cable To Housing (Milliohms MAX) <u>1.0</u>		
RF High Potential (VRMS MIN @ 5 MHz) <u>670</u>		
I.R. (Megohms Min) <u>10,000</u>		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K.C. MAHER 19OCT90		 Tyco Electronics Corporation Middletown, PA 17057			
		CHK D.L. 19JCT90					
DIMENSIONS: (mm) / INCHES		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		NAME			
		APVD M.Y. 19OCT90		OSX RIGHT ANGLE CABLE PLUG, CRIMP / SOLDER ATTACHMENT			
		PRODUCT SPEC —					
		APPLICATION SPEC —					
		—					
MATERIAL —		FINISH —		SIZE A2	CAGE CODE 00779	DRAWING NO C-1060888	RESTRICTED TO —
		CUSTOMER DRAWING		SCALE 6:1	SHEET 1	OF 1	REV D

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5837-5002-10](#)