

CATALOG LISTING
V3-370
 PAGE 1 OF 1
 ISSUE **M**
 2
 REVISIONS
 A 0005782
 R J
 04 JUN 04
 DDM/CAD
 DRAWN
 DCS 15 JAN 97
 CHECK
 AK
 04 JUN 04
 CHECK
 X101481-V3
 REPLACES
 PR-22590

MICRO SWITCH
 a Honeywell Division


FED.MFG.CODE 91929

SWITCH - BASIC

CATALOG LISTING

V3-370

CK-D3469

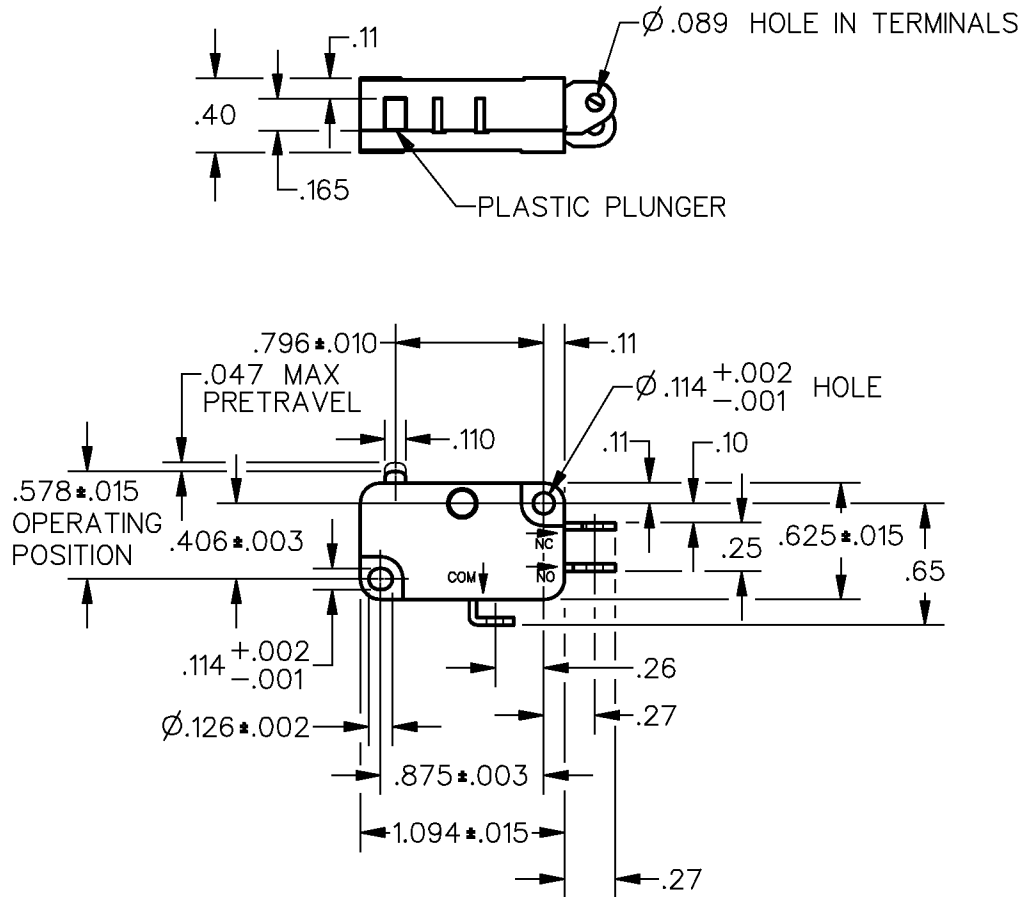


NOTES

- 1 - TERMINALS ARE PLATED FOR SOLDERING
- 2 - IN INSPECTION, DO NOT BURN OUT - GOLD CONTACTS
- 3 - IN INSPECTION, DO NOT EXCEED 10 VDC, .1A RESISTIVE LOAD
- 4 - INSPECT SWITCH RESISTANCE PER CONTROL PLAN

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE———150 GRAMS MAX	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ONE PLACE (.0) ± .030 TWO PLACE (.00) ± .015 THREE PLACE (.000) ± .005 ANGLES ± WEIGHT	
RELEASE FORCE — — — 25 GRAMS MIN	L22 1A 125 VAC 		
DIFFERENTIAL TRAVEL — — — .002—.010			
OVERTRAVEL — — — — — .050 MIN			
FREE POSITION — — — — — .625 MAX			
RELEASE TRAVEL — — — — — .010 MIN			



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[V3-370](#)