

## Ferrule - AI-TWIN 2X 0,75-10 GY - 3200975

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Ferrule, Sleeve length: 10 mm, Length: 17 mm, Color: gray

### Product Features

- Different versions of the individual TWIN ferrules can be selected for specific applications
- The TWIN ferrules provide a practical way of crimping two conductors in one ferrule
- These special ferrules allow chain bridges to be set up with ease



### Key Commercial Data

|                                      |                                                                                                         |
|--------------------------------------|---------------------------------------------------------------------------------------------------------|
| Packing unit                         | 1 pc                                                                                                    |
| Minimum order quantity               | 100 pc                                                                                                  |
| GTIN                                 | <br>4 017918 094522 |
| Weight per Piece (excluding packing) | 0.144 g                                                                                                 |
| Custom tariff number                 | 85369010                                                                                                |
| Country of origin                    | Germany                                                                                                 |

### Technical data

#### Dimensions

|                                              |         |
|----------------------------------------------|---------|
| Length (b)                                   | 17 mm   |
| Maximum stripping length                     | 14 mm   |
| Sleeve length                                | 10 mm   |
| Inner dimension of the insulating collar (d) | 2.8 mm  |
| Ferrule diameter                             | 1.8 mm  |
| Insulating collar thickness                  | 0.25 mm |
| Sleeve wall thickness                        | 0.15 mm |

## Ferrule - AI-TWIN 2X 0,75-10 GY - 3200975

### Technical data

#### Ambient conditions

|                            |        |
|----------------------------|--------|
| Short-term temperature     | 120 °C |
| Max. permanent temperature | 105 °C |

#### General

|                                        |                                |
|----------------------------------------|--------------------------------|
| Color                                  | gray                           |
| Components                             | free from silicone and halogen |
| Flammability rating according to UL 94 | HB                             |
| Material                               | E-CU                           |
| Coating                                | tin-plated (galvanic)          |

#### Standards and Regulations

|                                        |     |
|----------------------------------------|-----|
| Connection in acc. with standard       | CSA |
| Flammability rating according to UL 94 | HB  |

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27060701 |
| eCl@ss 4.1 | 27060701 |
| eCl@ss 5.0 | 27400201 |
| eCl@ss 5.1 | 27400201 |
| eCl@ss 6.0 | 27400201 |
| eCl@ss 7.0 | 27400201 |
| eCl@ss 8.0 | 27400201 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 2.0 | EC000005 |
| ETIM 3.0 | EC000005 |
| ETIM 4.0 | EC000005 |
| ETIM 5.0 | EC000005 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30212109 |
| UNSPSC 7.0901 | 27121703 |
| UNSPSC 11     | 27121703 |
| UNSPSC 12.01  | 27121703 |
| UNSPSC 13.2   | 27121703 |

## Ferrule - AI-TWIN 2X 0,75-10 GY - 3200975

### Approvals

#### Approvals

---

#### Approvals

CSA / CSAus / EAC / EAC / cCSAus

---

#### Ex Approvals

---

#### Approvals submitted

---

#### Approval details

CSA 

CSAus


EAC

EAC

cCSAus

### Drawings

Dimensional drawing

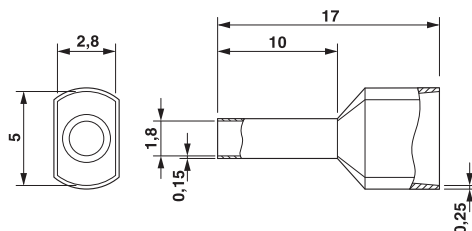



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[3200975](#)