

D

D

C


C

B

B


A

A

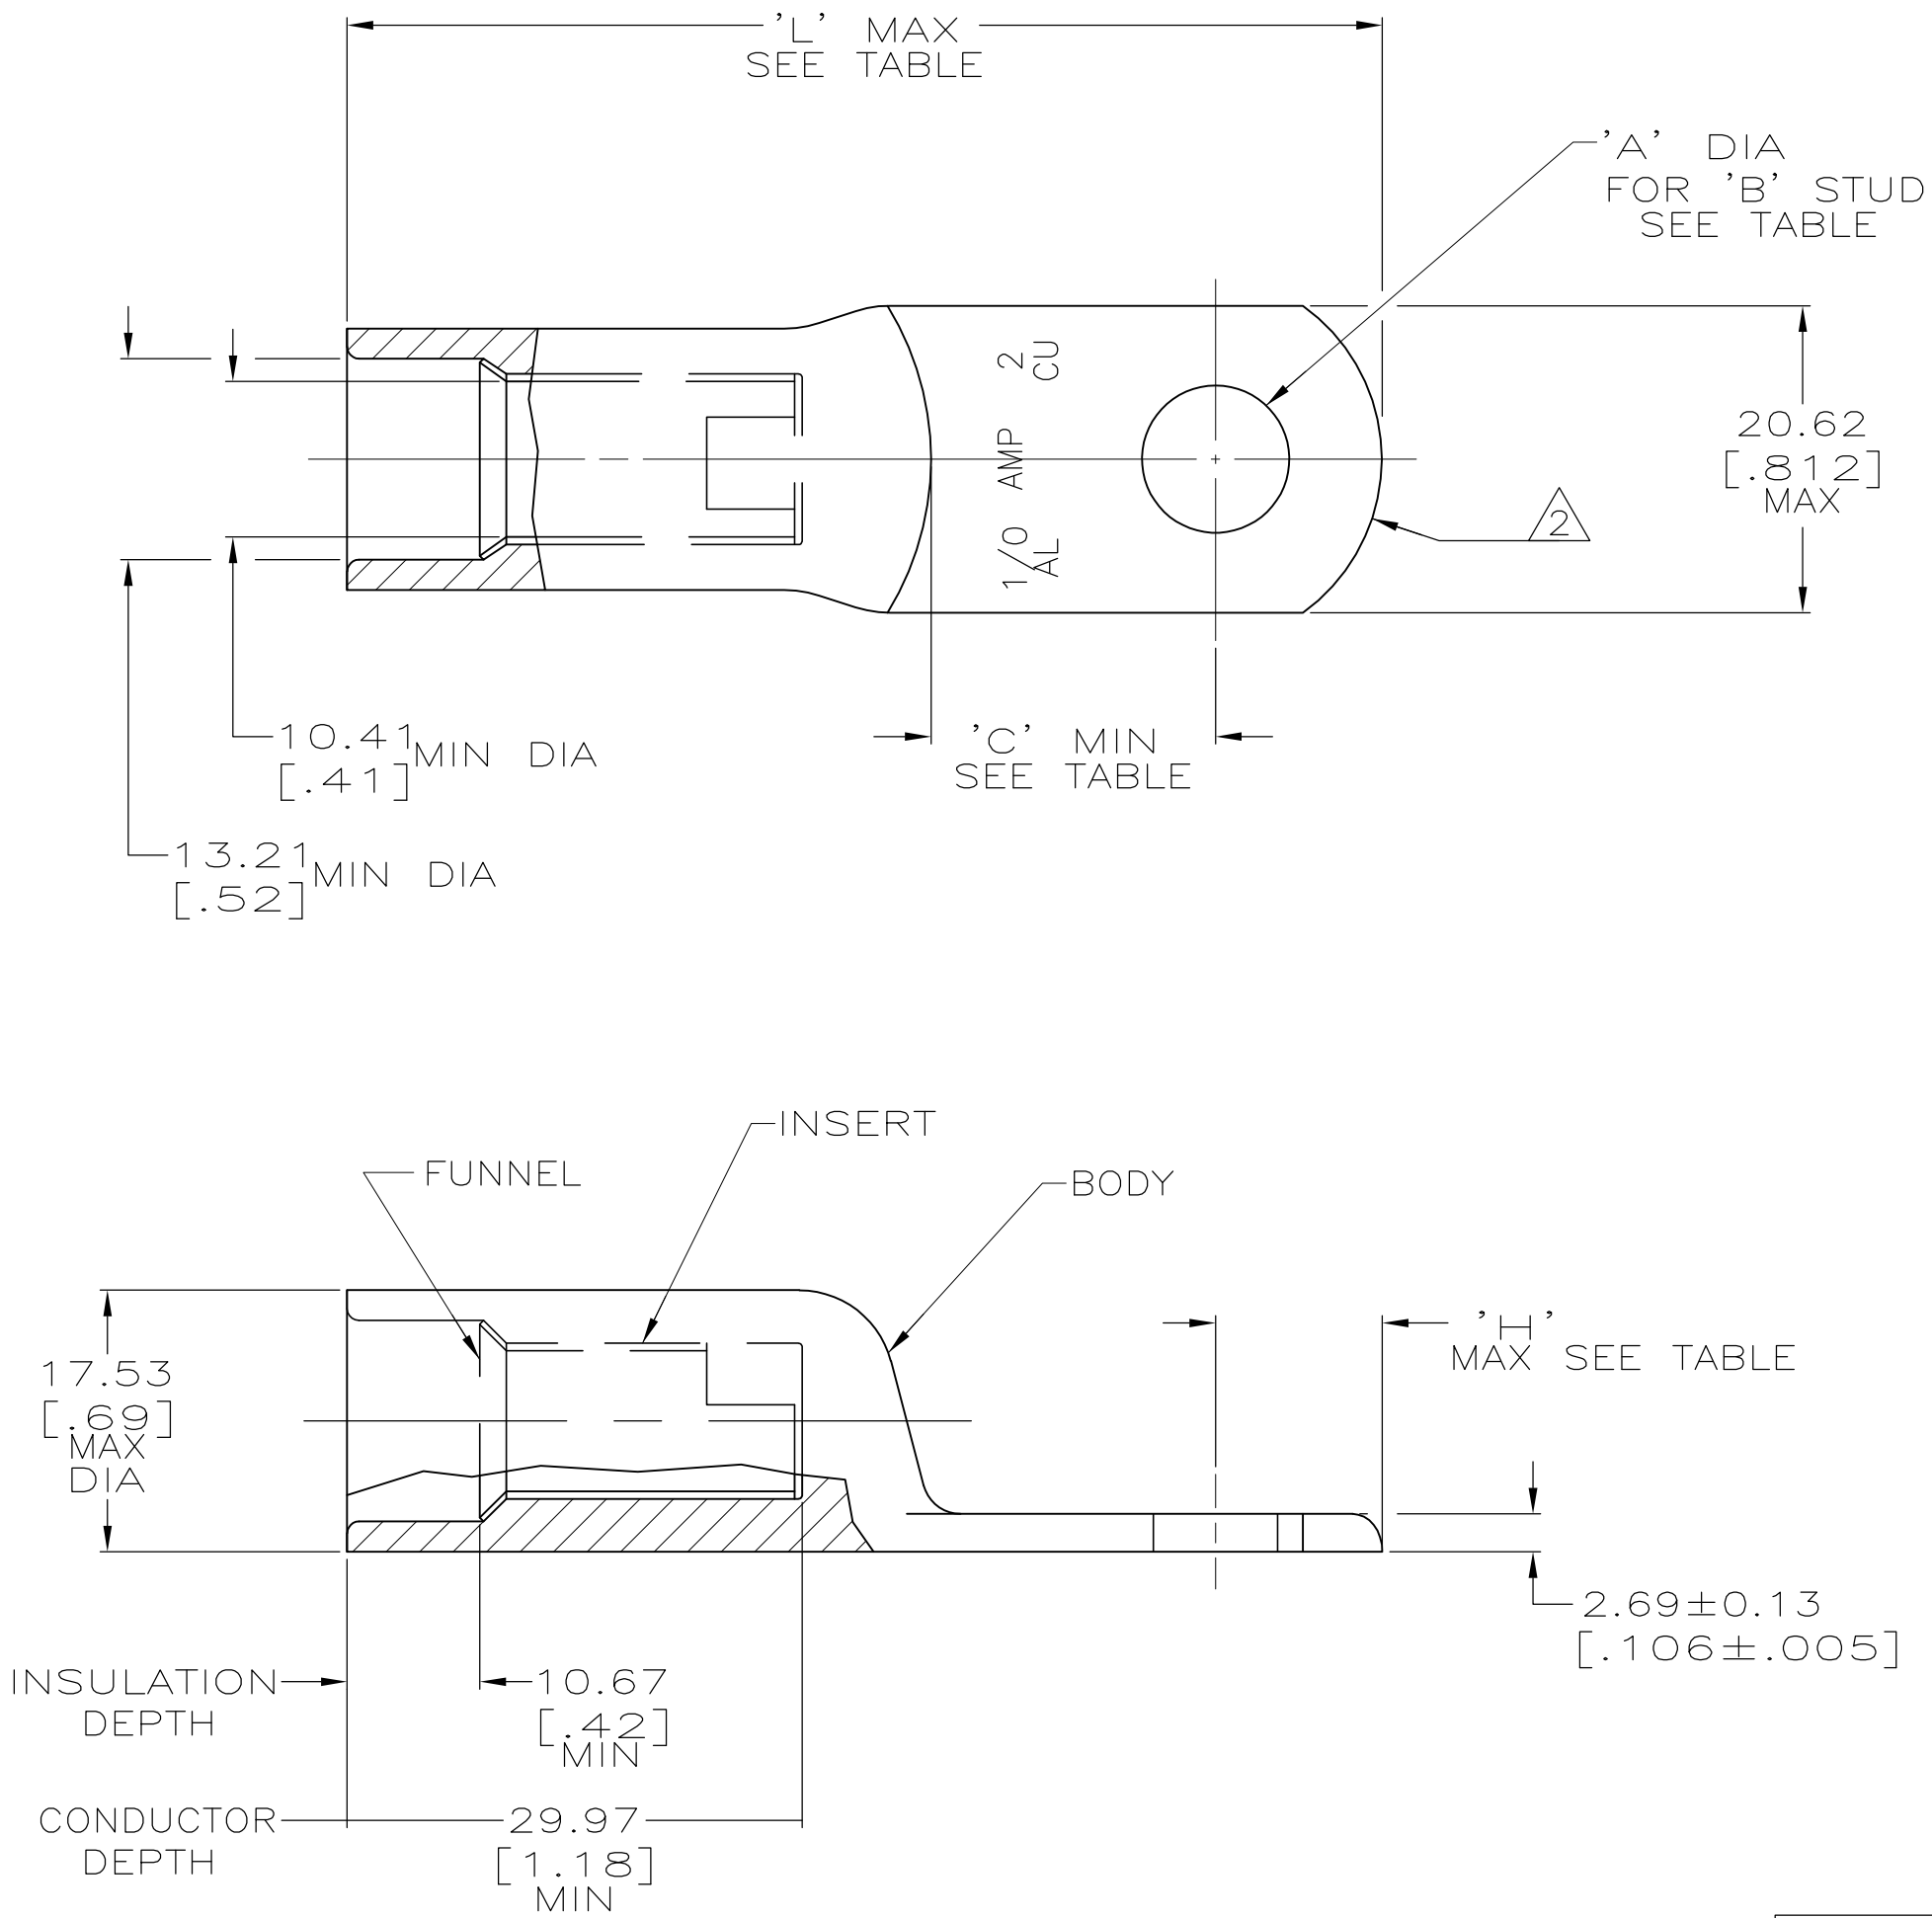

- 1 WIRE INSULATION: 10.79[.425] — 11.94[.470] DIA
- △ THE TONGUE RADIUS FEATURE IS NOT A TOOLING CONTROLLED DIMENSION AND MAY NOT BE A TRUE RADIUS.

OBSOLETE	—	8.33[.328]	5/16	63.75[2.51]	12.45[.49]	10.18[.401]	BODY: COPPER ASTM-B187 ANNEALED TIN PL PER MIL-T-10727 0.00381[.000150] MIN THK	277151-7
	—	13.08[.515]	1/2	69.34[2.73]	16.76[.66]	11.38[.448]		277151-6
	57.0±5 GRAMS	6.73[.265]	1/4					277151-5
OBSOLETE	—	13.08[.515]	1/2	63.75[2.51]	12.45[.49]	10.18[.401]	INSERT & FUNNEL: BRASS ASTM B36 NICKEL PL SAE AMS QQ-N-290A, DATED JULY 2000, 0.00254 [.000100] MIN THK	277151-4
	54.0±5 GRAMS	6.73[.265]	1/4					277151-3
	56.0±5 GRAMS	9.91[.390]	3/8	69.34[2.73]	16.76[.66]	11.38[.448]		277151-2
53.0±5 GRAMS	63.75[2.51]			12.45[.49]	10.18[.401]	277151-1		
WEIGHT		’A’	’B’	’L’	’C’	’H’	MATERIAL & FINISH	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN 6/23/89 DK SCHRUM		 TE Connectivity				
				CHK 10/16/90 MS FEHER						
DIMENSIONS: MM [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 10/23/90 AJ KAUFMAN		NAME				
		0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC		WIRE TERMINAL, RING TONGUE, SEALED COPALUM 55.5mm2 [1/0] ALUMINUM 34.3mm2 [2] COPPER				
				108-11011						
MATERIAL SEE TABLE		FINISH SEE TABLE		APPLICATION SPEC		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
				114-2134		A2	00779	C-277151	—	
				CUSTOMER DRAWING				SCALE 2:1	SHEET 1 of 1	REV R

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[277151-1](#) [277151-7](#)