

10 9 8 7 6 5 4 3 2 1

F

E

D

C

B

A

F


E

D


C

B

A



5 CIRCUIT SHOWN

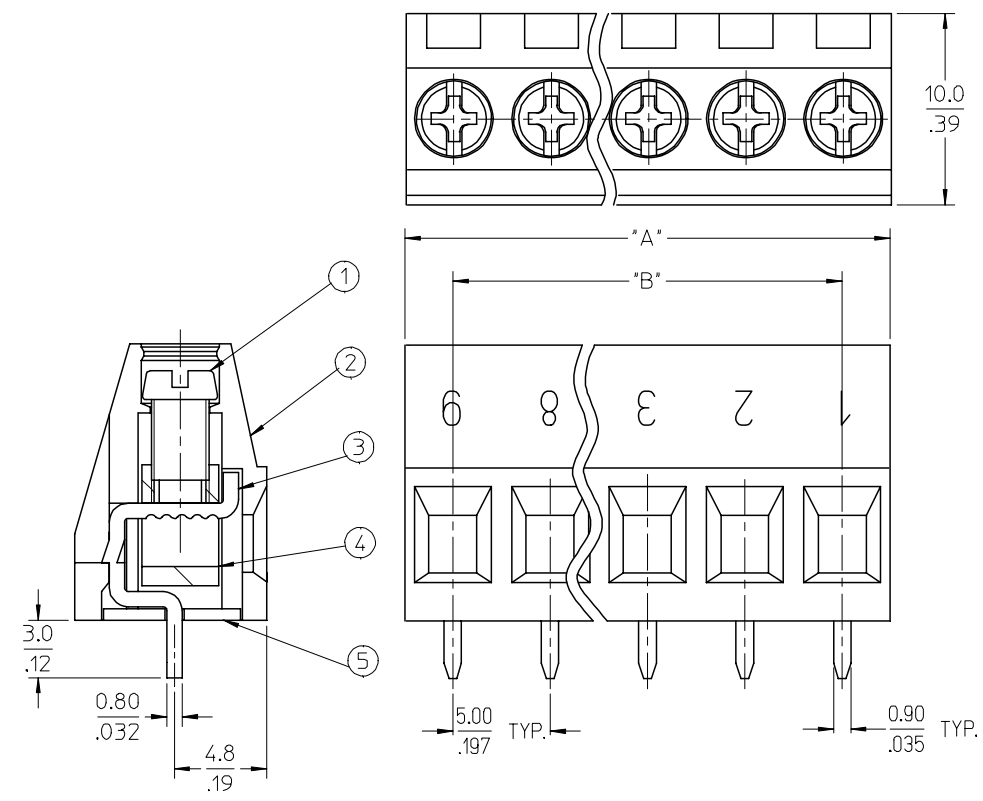

SPECIFICATIONS:

1. MATERIAL:

(1). SCREW: C1010.

(2). BODY: PA66

(B) (3). TERMINAL MATERIAL: BRASS

TERMINAL FINISH: 3 μ m (118 μ in) MIN MATTE TIN
OVER 2 μ m (79 μ in) MIN NICKEL

(4). CAGE: BRASS

(5). COVER: PA66

2. WIRE RANGE: 22-14 AWG.

3. ELECTRICAL RATING: 300V, 15A.

4. MAX TORQUE: 4.5 in-lb.

5. WIRE STRIP LENGTH: 5.00mm.


6. INSULATION RESISTANCE: DC500V, 500 MEGOHMS.

7. OPERATING TEMPERATURE: -40°C TO +105°C.

8. NUMBER OF POSITIONS AVAILABLE = 2 THROUGH 24.

9. ALL COMPONENTS ARE ROHS COMPLIANT.

ADD TERM PLATE TO NOTES EC NO: ET2007-0250 DRAWN: CLYORK 2007/01/15 CHKD: JMACNEIL 2007/01/22 APPR: JMACNEIL 2007/01/23 REV B	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 4:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION		
					DRAWN BY C. YORK	DATE 2006/10/12	TITLE 5.00MM, EURO TERM. BLOCK VERT, PC MOUNT, REVERSE UPSIDE DOWN IMPRINT				
					CHECKED BY J. MACNEIL	DATE 2006/10/12					
					APPROVED BY J. MACNEIL	DATE 2006/10/12	MOLEX INCORPORATED				
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			MATERIAL NO. SEE SHT. 2		DOCUMENT NO. SD-39549-002			
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											

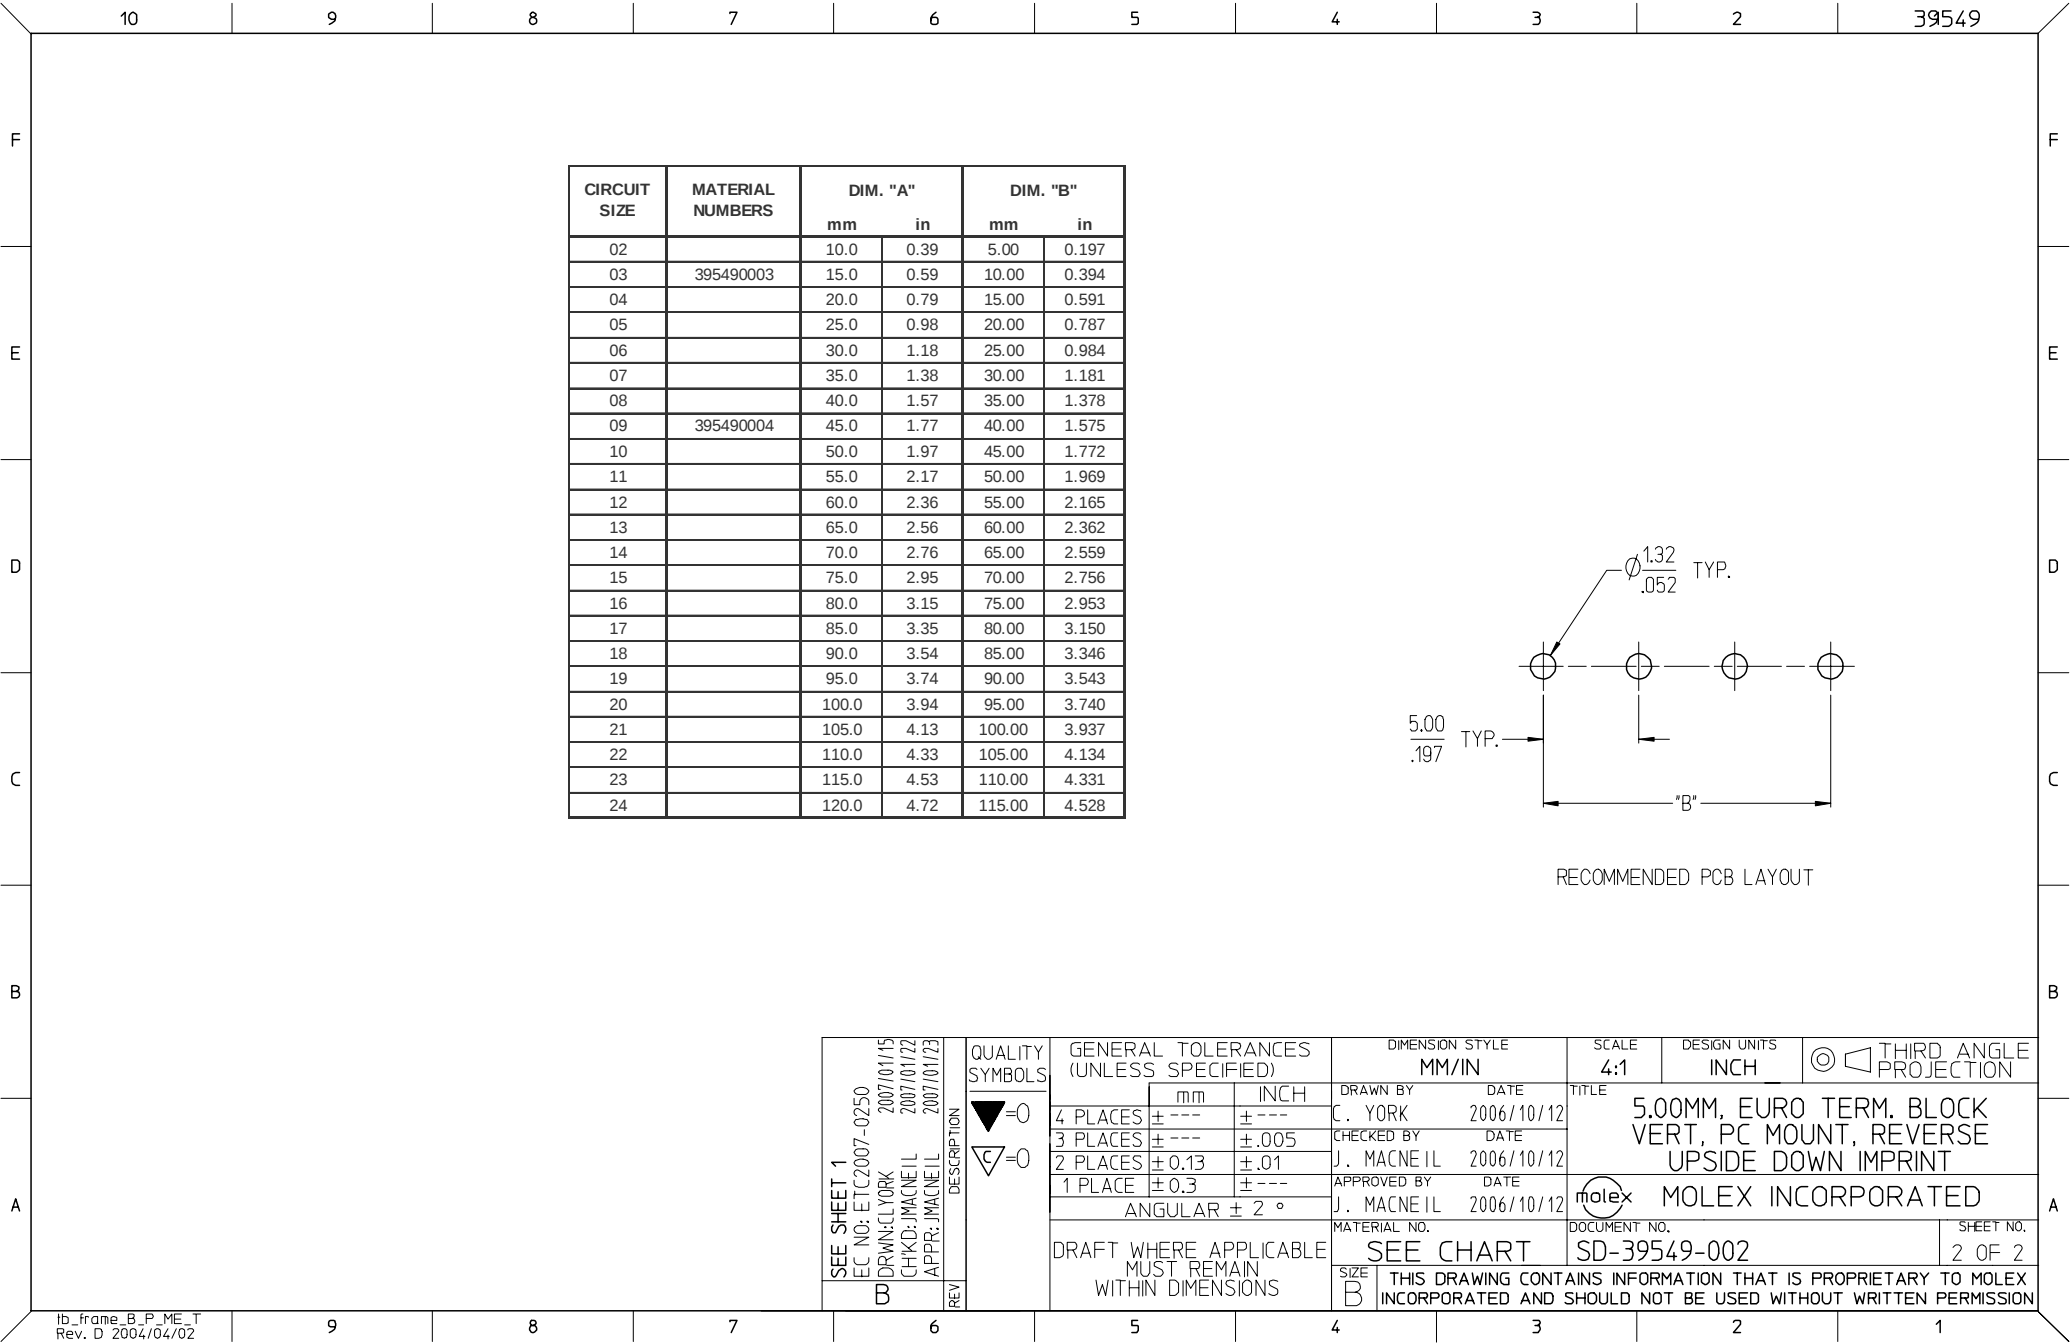

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

[39549-0003](#) [39549-0004](#)