
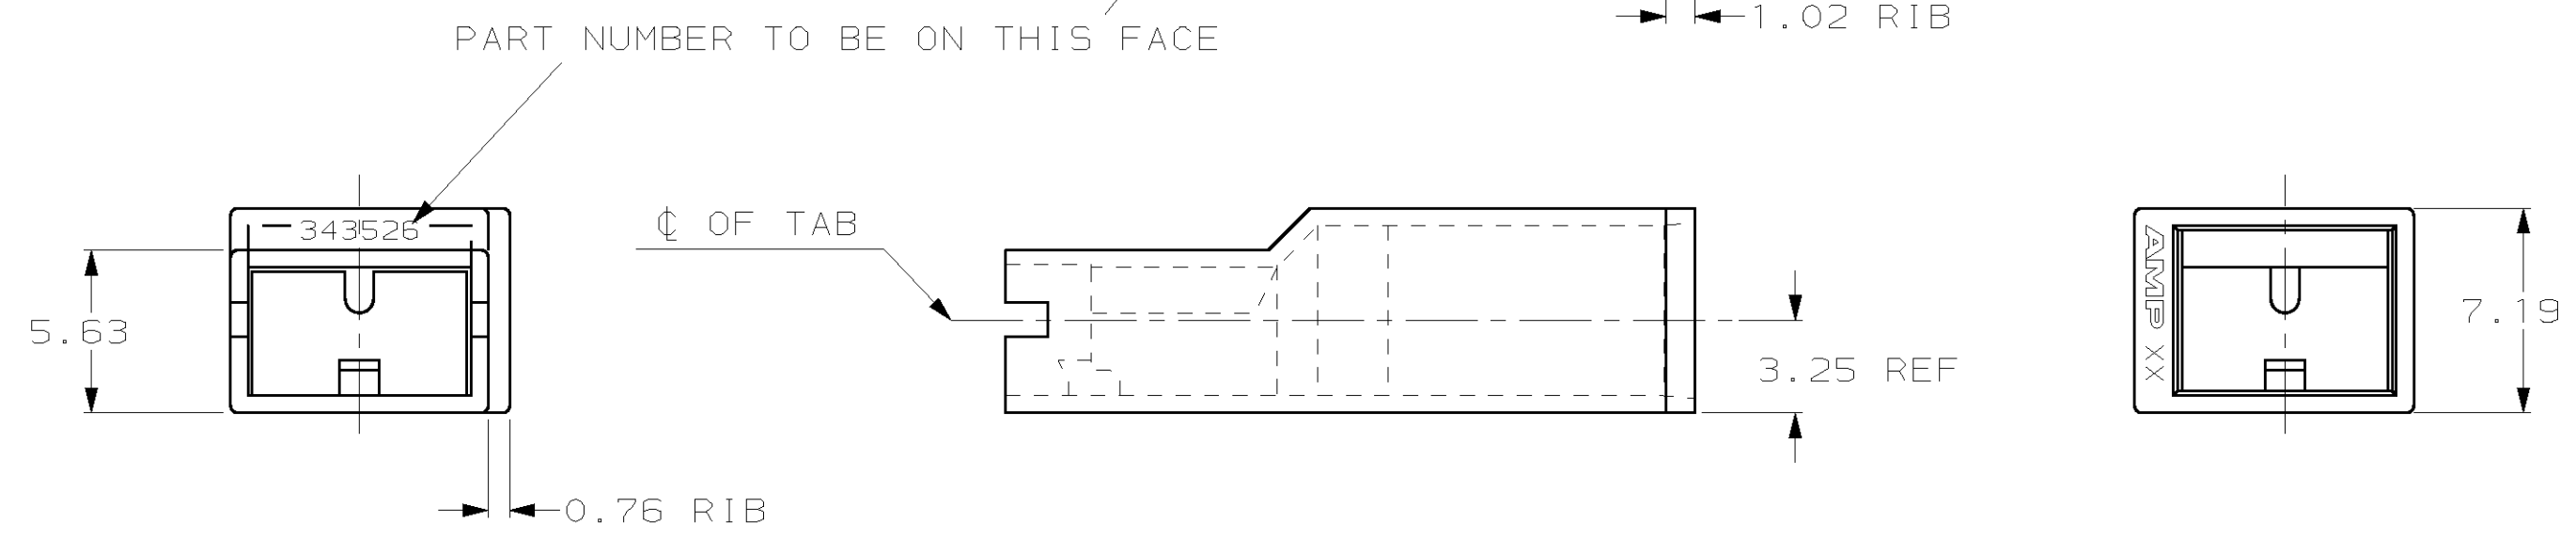
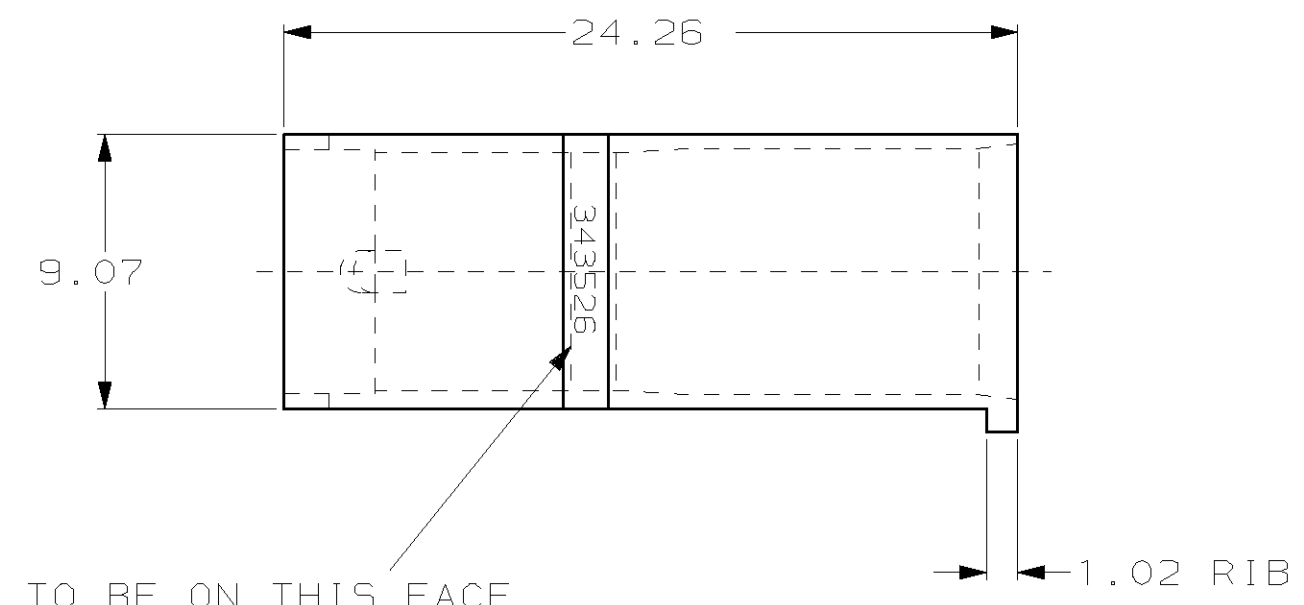


LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
AF	50	B	REV PER 0L10-0424-97	10/30/97	JR	JG	

SUGGESTED MATING TAB

NOTE: MOLD TO AMP SPEC 115-40-1.

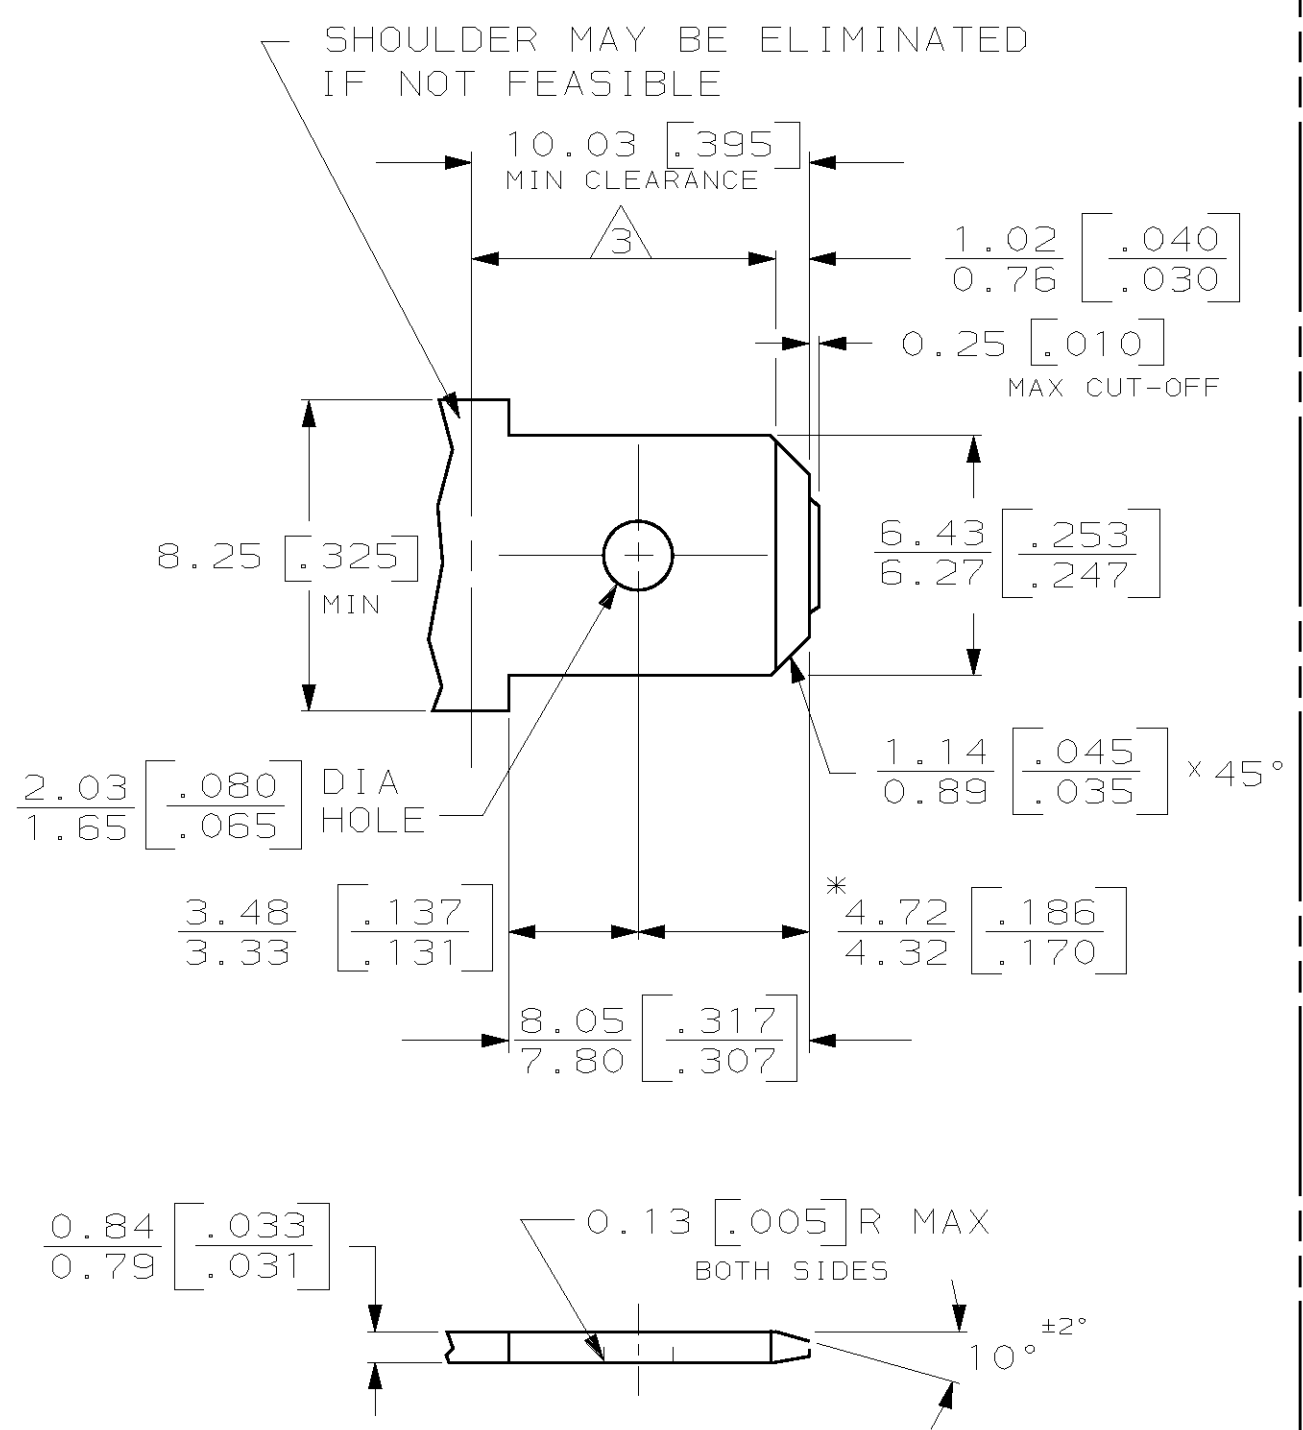

- 1 - MATL: 1/2H BRASS OR NICKEL PL STEEL.
 - 2 - NO BURRS PERMISSIBLE AT HOLE.
 - 3 - MUST BE FLAT WITHIN 0.076 [.003] OVER THIS LENGTH.
 - 4 - TIN PLATING IS REQUIRED ON BRASS WHEN TERMINAL TEMP. IS OVER 225°F.
 - 5 - HOLE MUST BE SYMMETRICAL ABOUT TAB Q WITHIN 0.076 [.003]
- * TO BE USED ONLY WHEN SHOULDER IS ELIMINATED.

343526-1
PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	JR RUTH	10/30/97
DIMENSIONS:		CHK	MS FEHER	10/30/97
mm		APVD	J GILLESPIE	10/30/97
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	AMP Incorporated Harrisburg, PA 17105-3608	
0 PLC	±-	APPLICATION SPEC	HOUSING, RECEPTACLE, POSITIVE-LOCK, 6.35 [.250] SERIES, MK I	
1 PLC	±0.5	WEIGHT	SIZE CAGE CODE DRAWING NO RESTRICTED TO	
2 PLC	±0.5	CUSTOMER DRAWING	A2 00779 C- 343526	
3 PLC	±-	SCALE	4:1	
4 PLC	±-	SHEET	1 OF 1	
ANGLES	±-	REV	B	
MATERIAL	6/6 NYLON	FINISH	BLACK	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[343526-1](#)