

UNCONTROLLED DOCUMENT

PART NUMBER
SSL-LX2473YD

REV.

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATI	E
Α	UPDATED SPECS.	5.25,	95
В	E.C.N. #10BRDR, & REDRAWN IN 3D,	6.13.	01



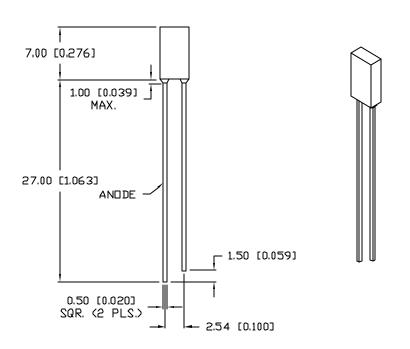

ELECTRO-OPTICAL CHARACTERISTICS TA=25°C If=20mA						
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND	
PEAK WAVELENGTH		585		nm	_	
FORWARD VOLTAGE		2.1	2.5	٧f		
REVERSE VOLTAGE	5.0			٧r	I _r = 100µA	
AXIAL INTENSITY		10		mcd	$I_f = 20mA$	
VIEWING ANGLE		110		2x theta		
EMITTED COLOR:	YELLOW					
EPOXY LENS FINISH:	YELLOW	DIFFUSED				

LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	30	mA
POWER DISSIPATION	105	mW
DERATE FROM 25°C	- 1.2	mW/°C
OPERATING, STORAGE TEMP.	- 40 TO + 85	·c
SOLDERING TEMP.	+ 260	·c
2.0mm FROM BODY		3 SEC. MAX

^{*} t<10µS

UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECINAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.003), MN= +0.000 MAX.= +

PART NUMBER

B SSL-LX2473YD

2mm x 4mm RECTANGULAR, 585nm YELLOW LED, YELLOW DIFFUSED LENS.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC., EXCEPT AS SPECFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT

SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE.

PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WFB: www.lumex.com

US WEB: www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY: CHECKED BY: APPROVED BY: DATE: 7.8.94
PAGE: 1 OF 1
BC SCALE: N/A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSL-LX2473YD